

QUALITY VALUE INNOVATION			<image/>
WOOD & METAL	INTERIOR	EXTERIOR	COMPONENTS
Edition 3.0			MADE IN USA



By providing **Quality, Value** and **Innovation**, Oak Pointe has established a large loyal customer base. Our broad offering of metal & wood products for interior & exterior use clearly defines Oak Pointe, LLC as the leader in "Made in the U.S.A." millwork.¹

In this catalog, you will find common to extraordinary **Stair Parts, Columns** and **other Millwork**; but if you do not see what you want, Oak Pointe will make it to your specifications from a photograph or exactly match an existing part for historic restoration. All this in most any wood species, powder coat finish or metal type desired. Custom components are an intregal part of our business. Wood components shown are for interior use unless stated otherwise or for exterior use upon request.

 Components in this catalog are made in the U.S.A. except for metal balusters, certain hardware and some stainless steel products. Some wood species we work with are grown in foreign countries but the finished products are made in the U.S.A. ...the craftsmanship is of a very high quality, and the wood, although "just" pine, is gorgeous. Beautiful grain, just the right amount of knots, and a silky smooth finish. We now realize, as with most things, that you get what you pay for, and that your product is in reality a bargain. Mark DD ...I know that I have told you before, but I think you can never hear it too often, you are truly lucky that you have a group of folks that really like their profession and the company they work for—it truly shows in their work. From the sales department to the production staff our

experience with Oak Pointe has been a

Stacey



I just wanted to share with you how beautiful the walnut newels and rails are that you sent out to me last month. The customer was so impressed that he joked that they made his floor look bad. Great Job!

breath of fresh air!

...I want to tell you what a pleasure it is in this day and age to do business with another company that also [cares] about the quality of both product and service!

Laura

...over the top fantastic! David M.

MADE IN THE USA **

www.StairPartsandMore.com



ABLE OF CONTENTS

onone

What's inside8-11
Historic Restoration & Renovation12
Architectural Style Guide13
Standard Wood Species14
Special Order Wood Species15
Milling Options
Rustic & Distressed Textured Options
Stair Component Selection Guide
Anatomy of a Stairway22-23
Baluster & Newel Options
Estate Components



5101

BOX NEWELS

The Anatomy of Our Box Newels	32
Step 1: Choose Your Box Newel	
Step 2: Choose Your Cap	
Step 3: Choose Your Milling Option	
Step 4: Choose Your Panel Option	
Contemporary 4630/4660 Series	
Tapered 4092T, 4293T, 4294T Series	44
Box Newels 4075 Series	45
Box Newels 4091 Series	
Box Columns	48
Box Newels 4076 Series	49
Box Newels 4291 Series	
Box Newels 4092 Series	
Box Newels 4392 Series	

DIAMOND

Malta	
Portsmouth	
Avenue i	
Main Street	
Farm	
Emperor	
Art Deco	
Victoria	
Federal	
Cambridge	
Clifton Park	
Regency	
Belmont	
Hudson	
Milan	
Highland	

BALUSTER PANEL

and a shadow in the second	
Interior	114-115
Interior & Exterior	115-117



Barcelona	120-123
Vienna	124-127
Lisbon	128-130

Arts & Crafts	132-135
Mission	136-141
Bristol	142-145
Carolina	146-149
Challis	150-153
Challis Narrow	154
Hampton Narrow	155
Hampton	156-159
Colonial	160-163
Traditional	164-169

IRON

<i>Finishes</i>
Iron Baluster Selection Guide
Iron Adhesives & Tools
From the Pacific
Balto
Twist & Basket 177
Knuckle & Wave
Gothic
Mediterranean178
Venetian
Circle
Scroll
From Europe
Twist & Basket
Knuckle & Ribbon
Geometric & Round183
Gothic
Supra Tuscany185
Scroll
Hammered Scroll186



MODERN METAL COLLECTION

Modern Metal Made Easy	
What's Inside	190-191
Introduction	
Malta Series	
Contemporary Box Newels	
Custom Powder Coating	194-195
Stainless Steel Balusters Series	
Stainless Steel Fittings	

STAINLESS STEEL FULL VIEW

Rectangular Cap Rail Systems	198-199
Round Cap Rail Systems	
Base Shoe- Top Mount	
Base Shoe- Fascia Mount	
Base Flanges	
Fascia & Other Adapters	

STAINLESS STEEL SQUARE

Newels & Newel Components	
Handrail & Fittings	210-211
Infill Options	212
Flat Bar Infill	213
3/4" Square Bar Infill	
1/2" Round Bar Infill	
5/8" Round Bar Infill	
Glass Infill	

RECTANGULAR Series

Newels & Newel Components	219-220
Handrail & Fittings	220-221
Infill Options	221

STAINLESS STEEL ROUND SERIES

Newels & Newel Components	222-224
Handrail & Fittings	225-227
Infill Options	
1/2" Round Bar Infill	229-230
5/8" Round Bar Infill	
Glass Infill	231-233

DESIGNER METAL INFILL

Linear Metal Panels	234-235
Designer Metal Panels	236-239
Designer Metal Wire Mesh	240-241

STAINLESS STEEL CABLE

SERIES

Cable Systems Overview	.242-243
2" Square Aluminum Newels	244
2" Sq Stainless Steel Newels & Component	s 245
Cable Braces	246
Newel Accessories	246
Handrail	246
Cable	
Cable Fittings Overview	247
Tensioning Fittings for Level Apps	.248-250
Non-Tensioning Fittings for Level Apps	.250-251
Tensioning Fittings for Stair Apps	.252-253
Non-Tensioning Fittings for Stair Apps	.254-255
Cable Tools and Accessories	256

Adhesives, Maintenance Products & Tools 257

ACCESSORIES

SCREWS & FASTENERS SERIES

SERIES



STAIR COMPONENTS

Wreathed & Level Curved Rail	
Handrails	262-265
Rail Fittings	266-273
Starting Steps	274-275
Treads & Risers	276
Winder Treads	277
Thick Treads	278-279
False Ends	279
Accessories	
Stringer Brackets	
Hardware	282-283

COLUMNS & POSTS


Decorative Columns	
Selection Guide	310-311
Tapered & No Tapered	312-313
Square Tapered with Panels	
Square No Tapered with Panels	
Fireplace Columns	
Selection Guide	316-317
Tapered & No Tapered	318-319
Interior Posts	

CABINETRY COMPONENTS & MOULDING

Cabinetry Overview	
Table Pedestals	
Island Columns & Legs Selection Guide	288-289
Corbels & Columns/Leg Options	
Island Columns	
Legs	
Titan Series	
French Manor Series	
Windsor Series	
Wiltshire Series	
Island Box Columns	
Bun Feet	298-299
Finials	300-302
Laminated Wood Balls	
Fireplace Mantels	304-305
Rope Moulding	
Mouldings	307-308



Rail & Shoe Rail	
Victoria Series	
Clifton Park Series	
Teresa Series	
Ellie Series	
Porch Posts	327-329
Accessories	
Order Numbering System	

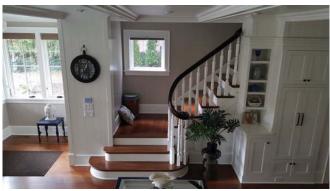


Photos by David W. McKee, RA




STAIR PARTS AND MORE

What's Inside...

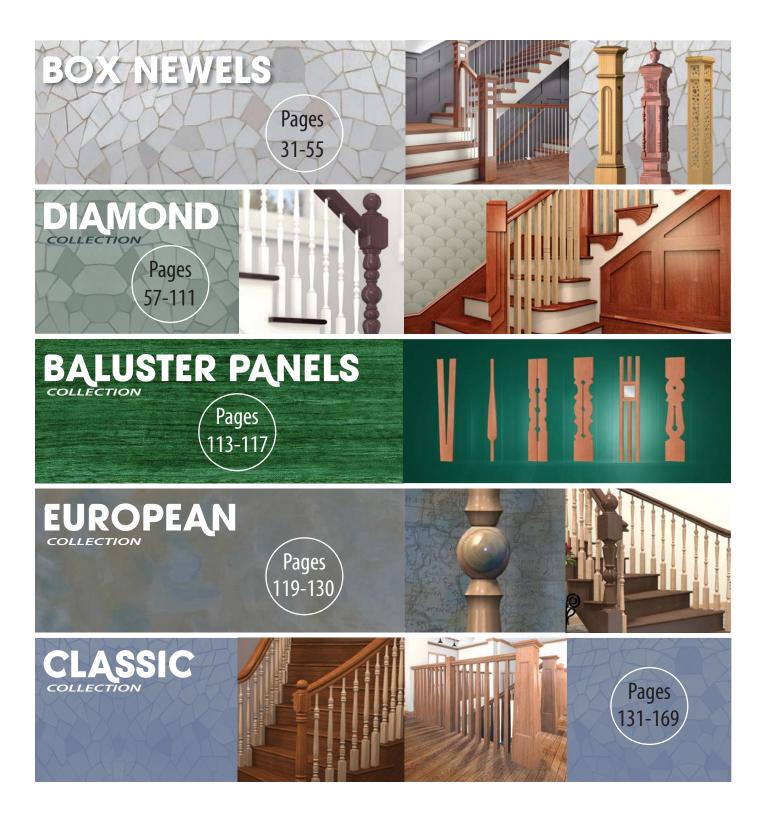




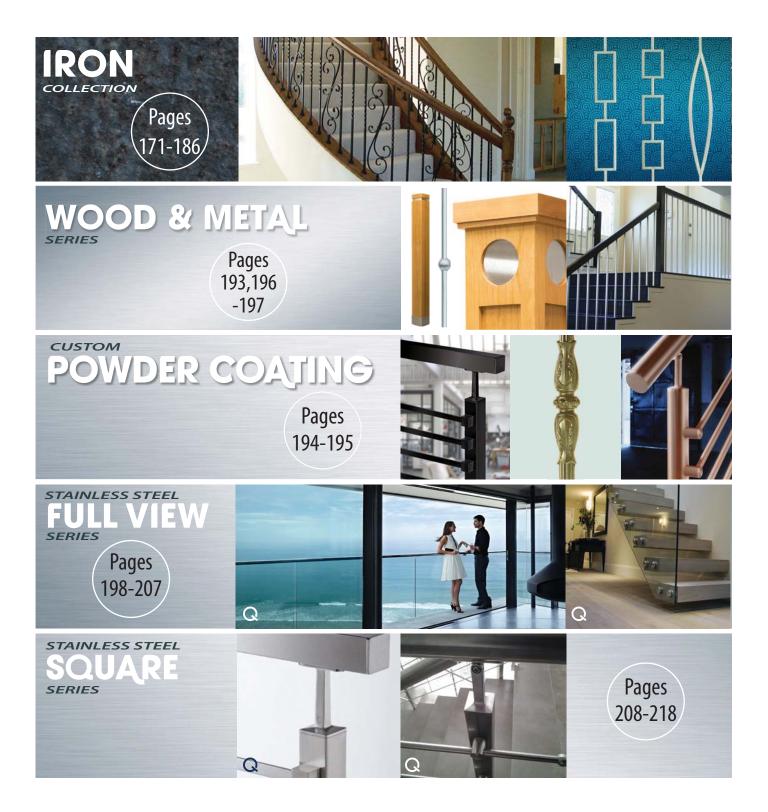



MODERN METAL COLLECTION

What's Inside...

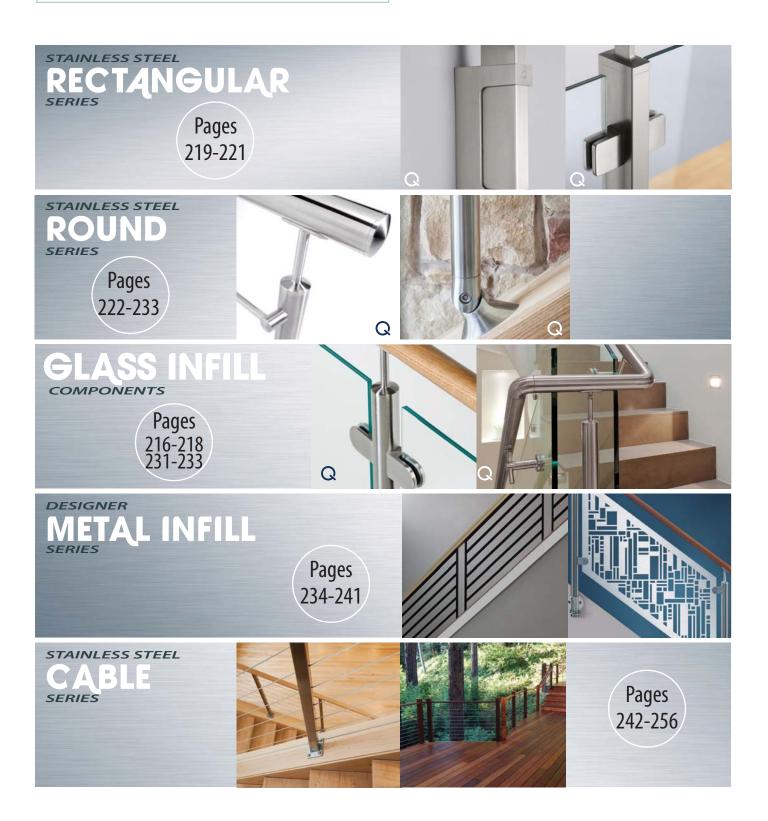







Historic



- From samples
- From CAD files
- From sketches or photos

Oak Pointe, LLC manufactures components so they exactly match a sample or CAD file for simple to complex parts. Whether a component has broken or worn out and needs to be replaced or if you are restoring a building for Historic tax credits, Oak Pointe can help.

In addition to making an exact match, we can also produce parts that are similar to a photo or sketch that you provide.

Oak Pointe helps bring past and present dreams to life!








Antique Baluster



(Actual photos of an Oak Pointe copy and an antique baluster)

Architectural

Contemporary/Modern/Art Deco

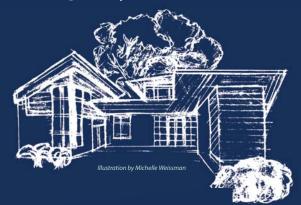

Art Deco	page 70	Highland	page 108
Arts & Crafts	page 132	Hudson	page 100
Avenue i	page 60	Main Street	page 62
Emperor	page 68	Malta	page 58
Farm	page 64	Mission	page 136

Style Guide

We have taken the guesswork out of selecting your components by matching the proper Oak Pointe series to these architectural styles.

European Styles



Barcelona	page 120	Hampton	page 156
Bristol	page 142	Highland	page 108
Carolina	page 146	Milan	page 104
Challis	page 150	Vienna	page 124
Lisbon	page 128		

Classic Styles



Belmont	page 96	Hampton	page 156
Bristol	page 142	Highland	page 108
Cambridge	page 84	Hudson	page 100
Carolina	page 146	Portsmouth	page 59
Challis	page 150	Regency	page 92
Clifton Park	page 88	Traditional	page 164
Colonial	page 160	Victoria	page 73
Federal	page 80		

Craftsman/Mission



Arts & Crafts	page 132
Farm	page 64
Main Street	page 62
Mission	page 136



Wood Species



Standard Wood



Alder (select)

The heartwood ranges from light tan to reddish brown. It has a uniform texture & fairly straight grain. Select Alder may at times contain small tight knots.



Beech

BCH



American Cherry

The sapwood is pale yellowish in color. The heartwood is red to pink-brown & darkens over time. Straight closed grain with small gum pockets & brown narrow pith flecks.

Is typically pale cream color but can have reddish brown tones. It has

tiny pores, rays & has an even texture & straight grain.



Brazilian Cherry (Jatoba)

The wide sapwood is white to gray & contrasts from the dark streaked heartwood. The heartwood is red or orange brown when cut but darkens to a reddish-brown after exposure. The texture is medium to coarse & the grain is usually interlocking. It has a golden luster.

Hard Maple

The sapwood is most often used, which ranges from white to off-white with red hue. Heartwood is a darker reddish brown. Has fine even texture with very straight grain but can be curly or quilted.

HMPL



Hickory

The heartwood is brown or reddish brown & the sapwood is light yellow brown. Usually straight grain but may be wavy. Hickory components will randomly contain heartwood & sapwood.



Mahogany-Sapelle

The heartwood is a medium red to fairly dark reddish-brown with a purplish cast. The sapwood is whitish or pale yellow. The grain is interlocked and sometimes wavy, producing a narrow, uniform roe figure when quartersawn. The texture is fine to medium and it has a high, golden luster.

мну

Painted Gloss White

Domestically primed, sanded and painted gloss white similar to finish by importers.

PTD

Primer - Flat White Needs to be sanded & painted in field.

PRI



Poplar

Oak Pointe's standard is for staining with color ranging from light cream to yellowish-green. No dark green or purple other than a scarce thin streak. Uniform straight grain with medium texture & close pores.

POP



Red Oak

The color can vary but tends to be light to medium reddish brown (more red than white oak). Mostly straight grain with course texture.

ОАК



Soft Maple

The sapwood is most often used, which ranges from creamy white to reddish/gray. Heartwood is a darker reddish brown. Growth rings not as distinctive & has more pith flecks than Hard Maple. Has fine even texture with very straight grain but can be curly or quilted.

SMPL



Walnut

Oak Pointe's standard walnut is very high-quality and has low sap content. The heartwood is light to dark brown, often with a purplish cast. Sapwood is nearly white before steaming. Course texture with straight grain and some occasional wavy or curly areas.

WNT

White Oak

The color ranges from pale yellow-brown to medium brown. Straight grain with medium to course texture.



Wood Species Special Order examples

Other wood species examples. Call for quote on these or other wood species.



Acacia

Dark, golden brown with black streaking to pale brown with some red. Usually straight grained with even, medium to fine texture & some curly, interlocking grain with an attractive figure.



Ash The heartwood is grey-brown in color. Straight grain, medium course texture similar to red oak.



Birch-Natural

Unselected yellow birch & contains random mix of heartwood & sapwood. Heartwood is reddish brown & sapwood is white to yellowish. Straight closed grain with fine even texture.



Birch-Yellow

This is all sapwood ranging from white to vellowish, no heartwood.



Bubinga

Heartwood is light, reddish brown & attractively veined with pink or red stripes. The sapwood is white in color. The luster is high and it is fine in texture with a wavy grain.



Cumaru

Heartwood is medium to dark brown & may have reddish or purple hue or even streaks of yellowish or greenish brown. Very small open pores, uniform fine straight grain & texture.

Fir

Vertical Grain Douglas- The heartwood is light reddish-brown with uniform medium texture & straight grain.



Hemlock

The heartwood & sapwood are close in colorpale brown. Grain is usually straight with course uneven texture.



Lyptus[®]

medium texture.

Is a plantation grown Eucalyptus hybrid. Color

reddish brown and darkens over time. Similar

varies from lighter salmon pink to darker

grain to mahogany, is straight & even with

Varies in color from a lighter pink brown to

darker reddish shade often bordering onto

purple. The grain is straight but often has a

Varies in color from light tan to salmon pink

to reddish brown. The texture also varies from

rather fine to coarse & the grain is straight to

roey, wavy or curly, often w/attractive figure.

ribbon figure & crotch figures are also common.

Mahogany-African

Mahogany-Genuine







Mahogany-Santos The heartwood is reddish-brown. It is fairly uniform to striped with a medium to high luster. The grain is typically interlocked with ripple marks & a medium texture.







Pine-Southern Yellow The heartwood is orange to reddish-brown & the sapwood is yellowish white. Boards have

contrasting colors - light early wood to darker

denser latewood. Stronger than other pines

with straight grain & medium even texture.

Purpleheart





Reclaimed Heart Pine Strong durable wood that has been reclaimed

from old buildings, often southern longleaf pine. Material will have knots, splits, holes and other character but no representation on how much or their size. The majority of the holes will be 3/4" to 1" diameter or smaller but some may be bigger. Holes may be patched with epoxy prior to field finishing.



Red Elm

The heartwood is a beautiful reddish-brown. The grain is course and is straight to very irregular.



Red Oak-Quarter Sawn

Cut from the log lengthwise into quarters. This produces figure called flecking & exposes medullar rays- subtle wavy ribbon-like patterns across the straight grain. Flecking is more subtle than in white oak.

This tree is a hardwood and not a softwood. The

freshly cut. The sapwood is pinkish to white. The

heartwood is pinkish to reddish-brown when

Spanish Cedar




grain is usually straight, the texture is fine and even and it has a high, golden luster. **Teak** (Afromosia - good alternate) Dk golden-yel turning dk brown to almost black upon exposure. Irregular streaks or marks are

quite common. Narrow sapwood is pale yel or

white & sharply different. Grain can be wavy or mottled, texture is coarse, uneven & a dull luster.

Tigerwood



(Goncalo Alves) is golden-brown to reddishbrown with dark streaking. The grain is wavy, sometimes having a mottled figure that some compare with rosewood. It has a fine texture &

White Oak-Quarter Sawn

Cut from the log lengthwise into quarters. The flecking in white oak can be dramatic and exposes medullar rays- subtle wavy ribbon-like patterns across the straight grain.

White Oak-Rift Cut

Boards are cut perpendicular to the log's rings creating a tight straight grain and little or no flecking and a very uniform grain pattern.

Wenge



bands. Fairly straight grain with course texture & large pores. Reported to become lighter when exposed to light.

Zebrawood



Heartwood is pale yel-brown to pinkish-brown with highly contrasting, narrow, dk brown streaks. The striping pattern varies. Sapwood is white & distinct from heartwood. Grain is usually interlocked or wavy producing a ribbon figure.








Pine-Eastern White The heartwood is light brown to reddish brown and the sapwood is pale vellow to almost white. Soft, straight grain with very even medium

Pine-Radiata The sapwood is wide pale yellowish-white and

texture wood.




Milling Options

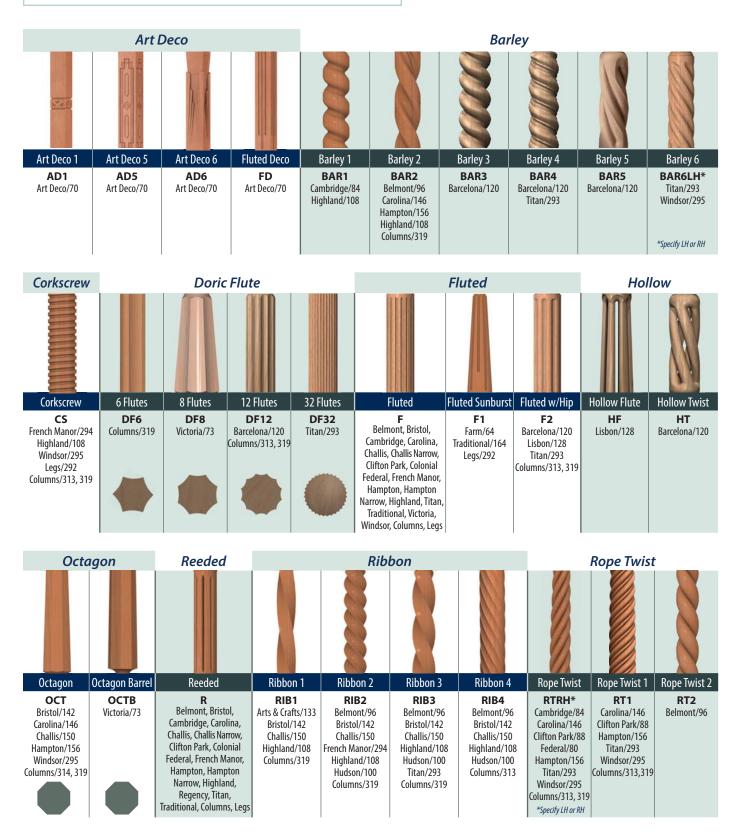





MILLING OPTIONS

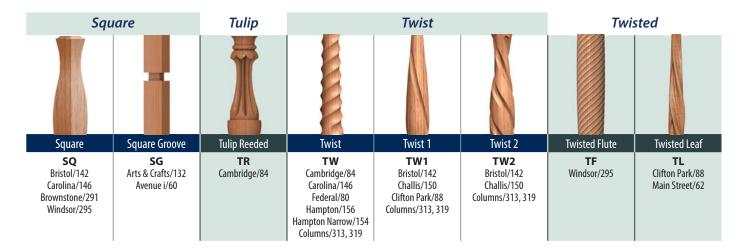



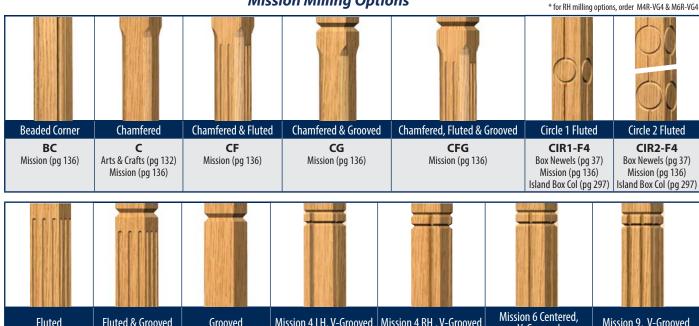

Fluted	Fluted & Grooved	Grooved	Mission 4 LH, V-Grooved	Mission 4 RH , V-Grooved	V-Grooved	Mission 9, V-Grooved
F Box Newels (pg 37) Mission (pg 136) Island Box Col (pg 297)	FG Mission (pg 136)	G Mission (pg 136)	M4L-VG4 Box Newels (pg 37) Mission (pg 136) Island Box Col (pg 297)	M4R-VG4 Box Newels (pg 37) Mission (pg 136) Island Box Col (pg 297)	M6C-VG4 Box Newels (pg 37) Mission (pg 136) Island Box Col (pg 297)	M9-VG4 Box Newels (pg 37) Mission (pg 136) Island Box Col (pg 297)

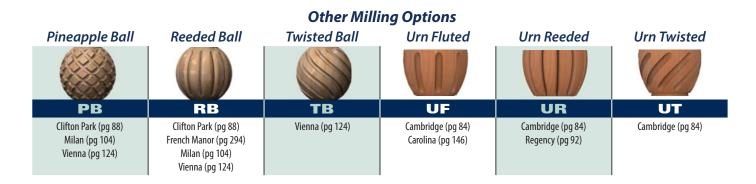



Rustic & Distressed

Textured Options

Rustic and Distressed Textured Options are done by hand. Each piece will vary from the next and will have its own unique qualities which proper finishing will enhance. Choose from a variety of textures and wood species in clear or character grade. Character grade will have knots, splits, holes etc., but no representation on how many or their size.

Hand Hewn 31 Texture: 4000 newel, 5360 balusters, custom handrail

Stains and Finishes

Darker finishes will accent the textures that you chose. If lighter finishes are desired it is recommended that a black glaze be used as a background to enhance the visibility of the surfaces. Please consult with a professional finisher for guidance. (Products come unfinished. Examples below are shown with finishes by others.)

- **Treads**
- **Risers**
- **Balusters**
- **Newels**
- **Handrails**
- and more



4091-FP-VGF-RS2 Vertical Grain Douglas Fir Rough Sawn #2 Clear Coat







Stained


Stained

Custom

Black Glazed & Stained

Rustic and Distressed Selection Guide

(Products come unfinished. Shown with Clear Coat and Black Glazed/Stained as examples.)

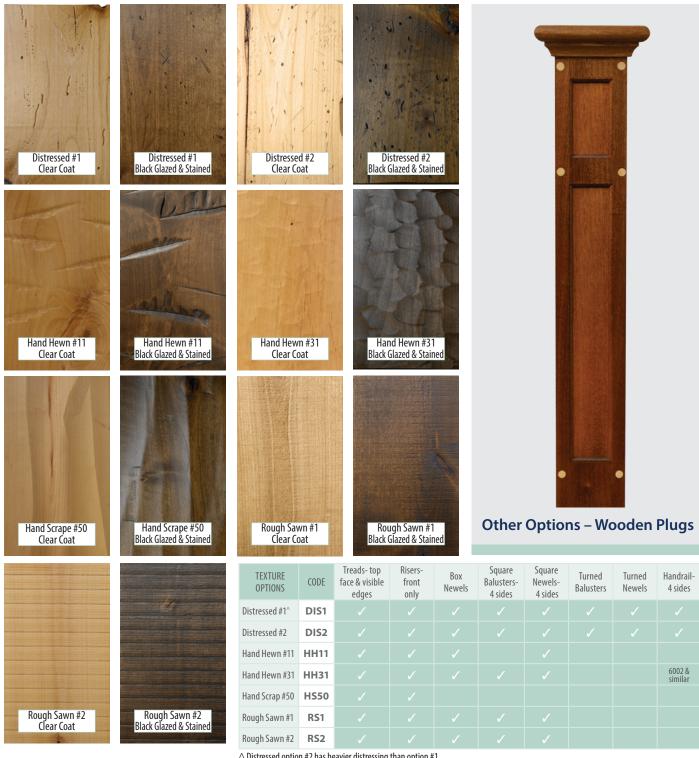

^ Distressed option #2 has heavier distressing than option #1

Other Options – Visible Rustic Nailheads

Decorative Wrought Iron Head Nails 1" L, Black Oxide






Cut Common Nails 1¹/₂" L, Black Oxide



Stair Components

Selection Guide

Milling options and group details begin on page numbers shown

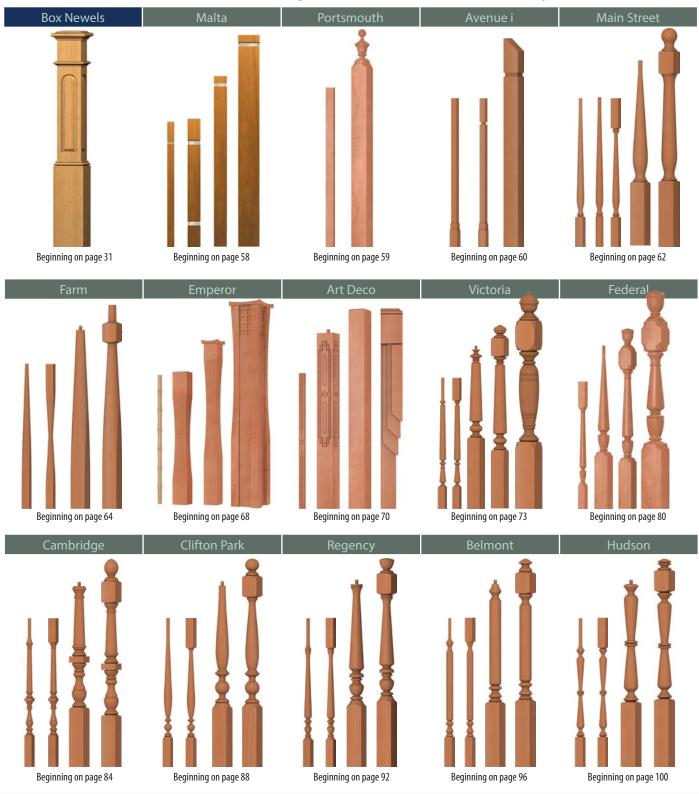

Oak Pointe has the largest standard selection in the Industry.




MODERN METAL COLLECTION beginning on page 187





Handrails/Fittings Starting Steps / Treads / Hardware / etc.

beginning on page 261

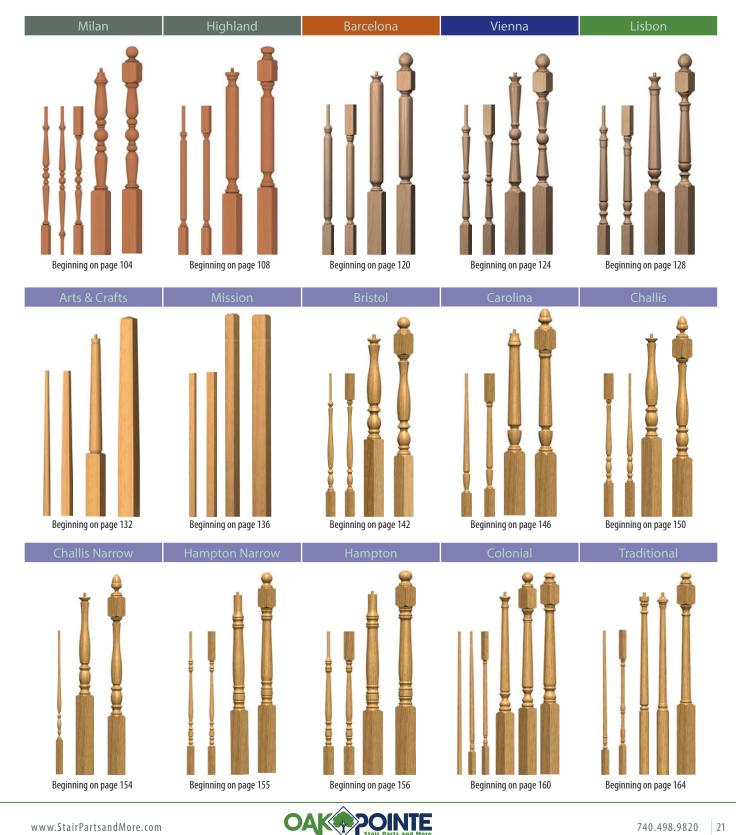

Anatomy of a Stairway

Follow these thorough but simple quidelines to obtain the Stairway of your dreams.

Step 1: Select your baluster style. At Oak Pointe we allow you the flexibility to choose between 3 Length and 5 Length wood baluster designs or metal balusters (Iron or Stainless Steel).

The 3 length

baluster system

aligns the bottom

square and the turned

area of the baluster

of the stairway.

with the rake (angle)

Balusters come with

trimmed from the hottom

with each group

than the maximum plow available on your handrail.

a loose bottom dowel pin and should be

3 Length Balusters are shown

Step 3: After selecting your baluster, choose your **Handrail** (see pages 262-265).

Pin top balusters utilize flat bottom railings. We recommend the use of plowed hand-

rail when square top balusters have been selected. With each stair group we show

suggested handrails but our full handrail offering is on pages 262-265. When select-

ing rail for your square top balusters make sure your baluster width is equal to or less

Step 2: Choose between a **Post to Post** and an **Over the Post** stair design. In a **Post to Post** system the handrail runs between the newel posts and in an **Over the Post** system the handrail runs over the top of the newels using fittings.

The 5 length baluster system aligns the bottom square and the turned portion of the baluster horizontally on each tread. Balusters have a fixed bottom dowel pin and should be trimmed from the top.

5 Length Balusters are shown

with most groups



Iron Balusters see pages 171-186


Stainless Steel Balusters see paae 196

Step 4: Choose your Newels. Decide if you want to use coordinated newels from the same group as your balusters or complementary ones, such as Box Newels (see pages 31-55), or Estate Components (see pages 26-29).


Step 5: On an Over the Post System

decide which starting fitting to begin your stairway: Volute, Turnout or Starting Easing. Starting Easing Caps are now available in multiple sizes and shapes (round, square or octagon). See pages 266-273 for all fitting options.

Step 6: Starting Steps are a beautiful architectural element for most any stairway. If you would like a starting step at the bottom of your stairway, use the choices you made in Step 3 (handrail), Step 4 (newels) and Step 5 (starting fittings) to choose the correct starting step. See pages 274 and 275.

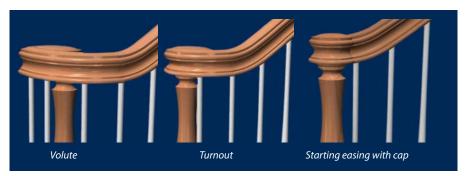

Step 7: Choosing which Treads & Risers are right for your stairway depends if you would like an open stringer or kneewall stairway and whether you will carpet all or just the center of the steps. For our selection of treads, risers, false ends and related moldings see pages 276-279.

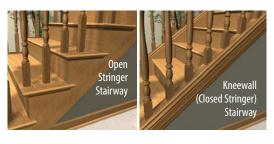



ANATOMY OF A STAIRWAY

Step 8: Select the rest of the **Fittings** needed for your **Over the Post** stairway. If you chose a **Post to Post** system, decide whether you want to utilize goosenecks with your landing newels. Most fittings are now available in a variety of cap sizes and shapes (see pages 266-273).



Ut wi all str to

Utilizing landing newels with long top blocks allows the railing to run straight into the newel top block



Newels on landings can have shorter top blocks like starting newels when a gooseneck fitting is selected

Step 10: You did it! Now place your order for Oak Pointe components with one of our dealers and our craftsmen will manufacture it with great care and skill. Remember, if you have other turned architectural details in your home or project we can make them for you and we can coordinate them with your stair parts too! Thank you for your confidence!





Baluster & Newel Options

Half Newels

Running your railing into a half newel at a wall is a great way to finish off your stairway.

Please note that certain designs are not symmetrical and may not lend themselves to being split.


Half Newels must be purchased in pairs.

Newel Drops

When installing landing newels with a portion of their bottom end showing, consider decorating it with Newel drops.

Our finials make great newel drops, see pages 300-302. As an example this is our FINIAL-ESN155 style finial being used as a newel drop.



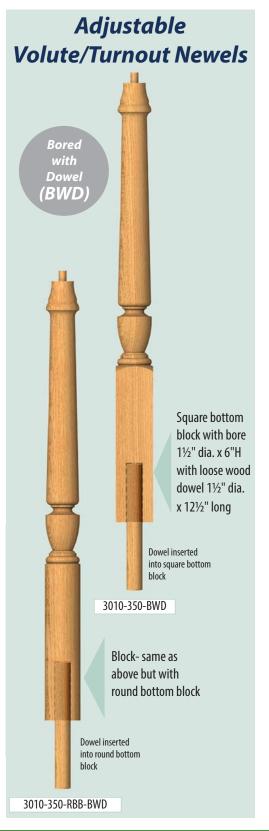

Newel Post Tops

Choose any of our finials as your top for post to post newels (see pages 300-302). Octagon & Square turned newels choose AT, BT, COL, MT & ST only.



Colonial Top (COL) shown

Decorative Rosettes carved into Newel Blocks

Decorate your newel posts with rosette designs carved into their top blocks. When ordering please specify the number of sides you want this option on:

- 2 Opposite blocks... add part -2180 to the Rosette number
- 2 Adjacent blocks... add part -290 to the Rosette number
- 3 Blocks... add part -3 to the Rosette number

For 3" wide Newels specify Rosette R1259 (which is 2¹/₄" wide) or for Newels up to 3¹/₂" wide choose R1266 (which is 2%6" wide).



(on 3" Block)




R1266 (on 3¹/₄" Block)



R1266 (on 31/2" Block)





Octagon Bottom Blocks (OBB)

All of our newels and balusters are available with Octagon Bottom Block (OBB).



ESN14-OBB

Round Bottom Blocks (RBB)



5300-175-34-RTRH-RBB



2515-175-34-RTRH-OBB


Estate Components

Make a bold statement







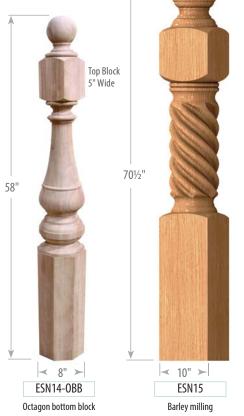













ESTATE COMPONENTS

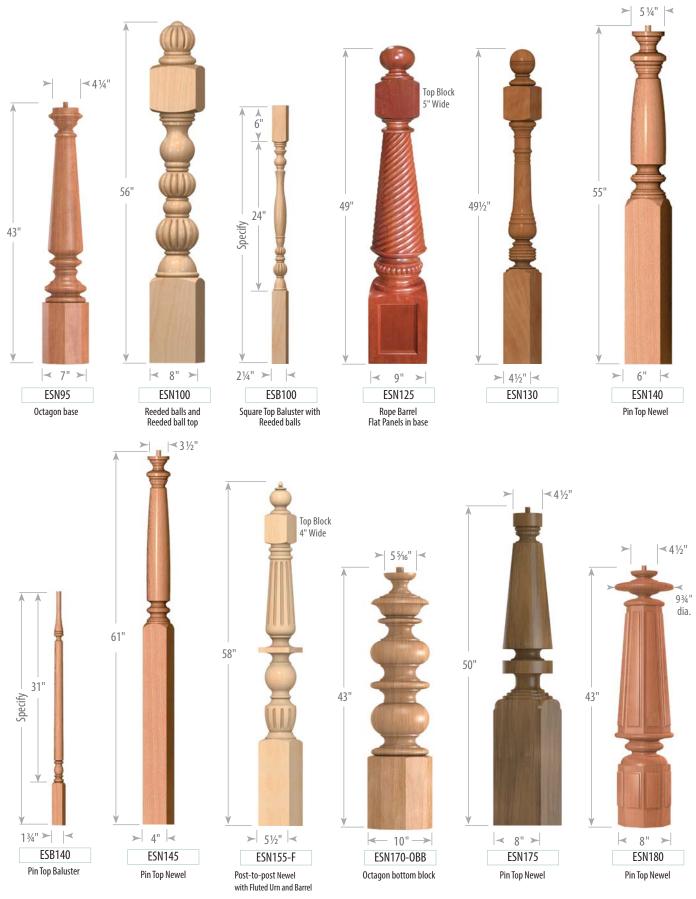




ESTATE COMPONENTS

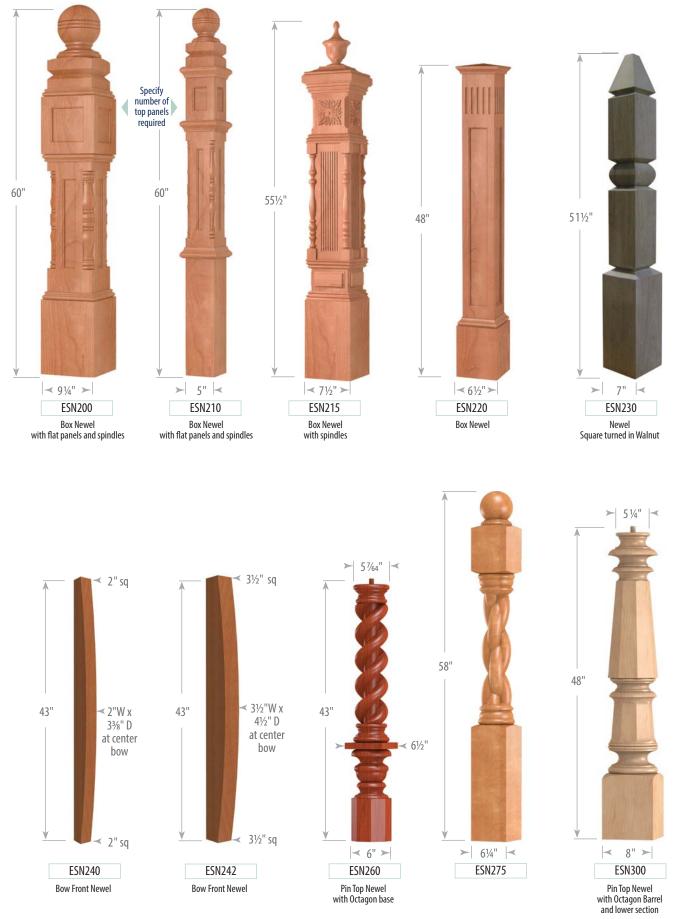



STAIR PARTS AND MORE

Metal and Wood...

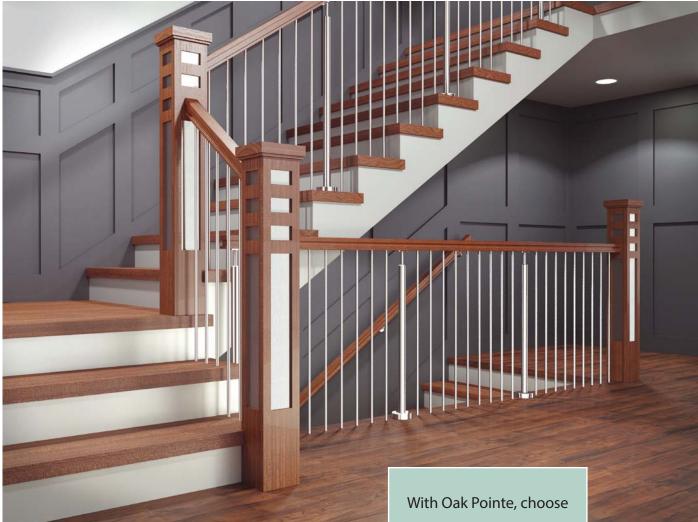

Products included in installation above:

- Box newels- 4660 with B, B1 & B custom sides and stainless steel panels (see pages 42-43)
- Handrail- 9200 (see page 263)
- Balusters- 1/2" round stainless steel (see page 195)
- Stainless Steel Newels-Round Series 1½"diameter (see pages 221-223)

With Oak Pointe, choose from our expanded industry leading wood and metal products, offering an endless variety of standard models and custom designs.



BOX NEWELS

0...

00

,0;

0.0

01

SQUARE • TAPERED • OCTAGON

的的理

(A)

Our Box Newel Collection, designed and manufactured by Oak Pointe, features the most extensive standard offering of box newels found anywhere. All of our box newels are handcrafted using lock miter joints, solid face grain sides and stile & rail construction with true floating panels. All components in this collection are for interior use only.

BOX NEWELS

MADE IN THE USA ★ 🖈

Box Newel Collection

Custom box newels are an integral part of our business. Call for pricing on your designs for interior or exterior use.












BOX NEWELS The Anatomy of Our Box Newels

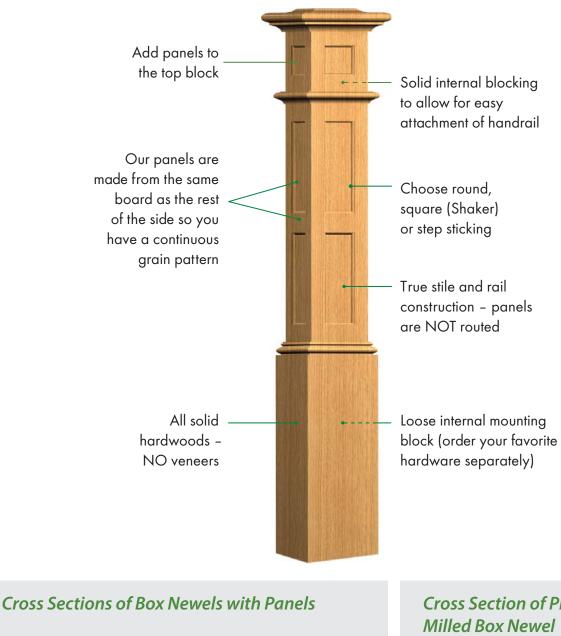




True floating panels Note: Space balls allow for normal expansion and contraction




True stile and rail construction

Cross Section of Plain or





BOX NEWELS

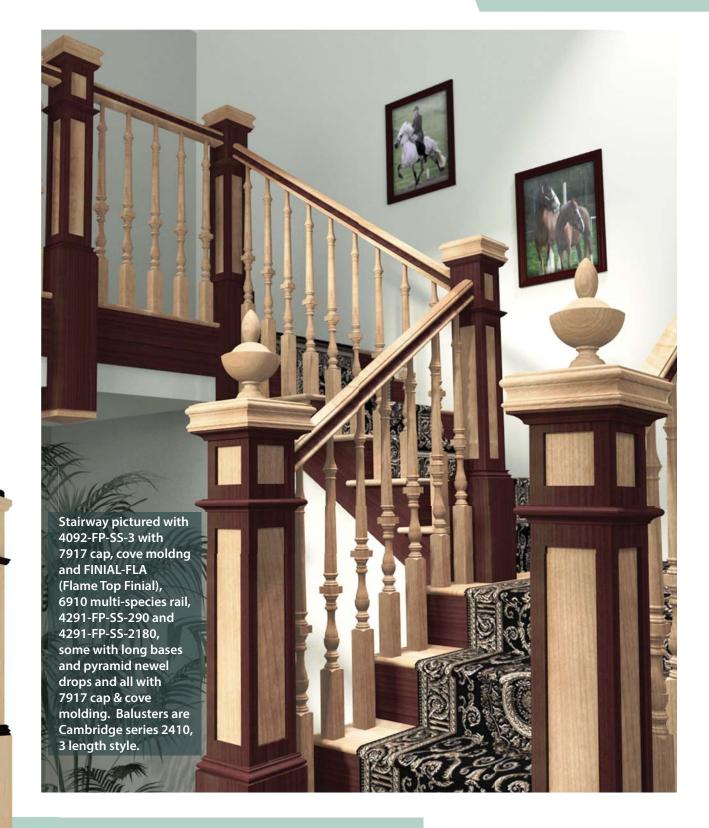

Box Newel with multi-species

Change the species on a portion or all of the cap and/or the moldings. On box newels with panels also change the panels (see panel options)










Estate Box Newels

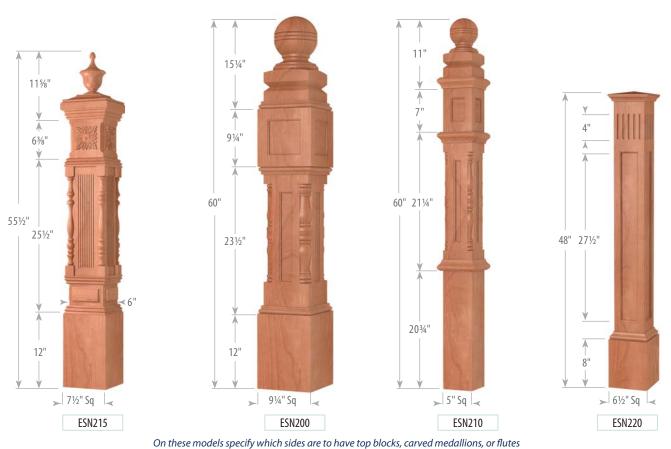

www.StairPartsandMore.com



BOX NEWELS






4092-FP shown with 7717 cap & cove molding



Box Newels with Extended Base

Box Newels with extended bases for side mounting or landing applications

> Please specify your requirements. 4091-FP shown with overall height of 72" and base at 40".

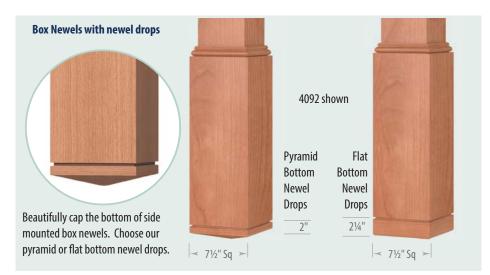

4091-FP shown with extended base








step three Add a decorative milling

Available in these models: 4075, 4076, 4091, 4092, 4291, 4392



Box Newel Series Milling Code 4091 – M6C-VG4

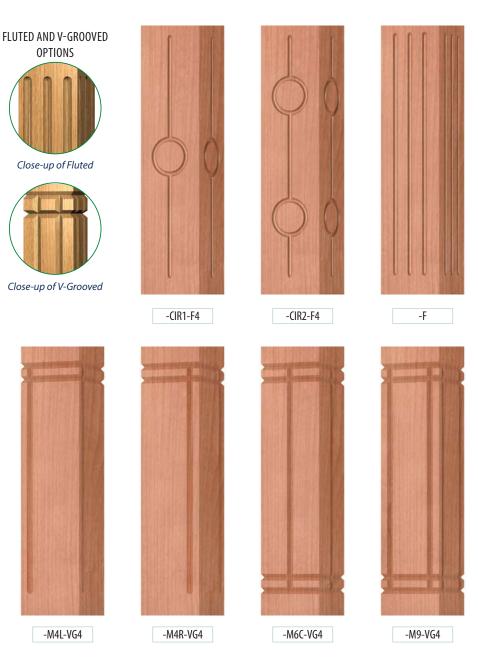

Milling Options	Circle 1 Fluted	Circle 2 Fluted	Fluted	Mission 4 LH V-Grooved	Mission 4 RH V-Grooved	Mission 6 Centered V-Grooved	Mission 9 V-Grooved
Code	CIR1-F4	CIR2-F4	F *	M4L-VG4	M4R-VG4	M6C-VG4	M9-VG4

* 4092 Series has 4 flutes per side.



Step four Choose a Panel design option

Step 4

Get your Raised or Flat Panels in a specie different than the main newel or in metal Get optional Square, Step or Large Sticking with your raised or flat panels Get your Raised or Flat Straight Top Panels with applied mouldings

Flat Panel

BOX NEWELS



Straight Top Flat Panel (-FP)

Eyebrow Top 'Flat Panel' (-FP-ET)

Panel Inserts - Chemetal®

Flat Panel

Round Top

(-FP-RT)







Raised Panel

Raised Panel (-RP-ET)



Round Top Raised Panel

Panel Inserts



Stainless Steel Panel (grain runs vertically) Multi-Specie Panel

Cobblestone #218 Cobblestone #253	Aurora #317	Serpentine #451	Blackened Aluminum #606	Brushed Brass Aluminum #915 *	Distinguished panel insert options are available in these Chemetal® products. Some patterns are available in other colors. For a complete selection see <u>www.chemetal.com</u> . * designate grain direction
Sticking and Top Bld All of our box newel panels are st order optional Square, S Found Sticking (standard) Step Sticking (-SP)	andard with Round Stick tep or Large Sticking. Square Sticking (-SS) Large Sticking (-LS) NOTE: Large sticking available only on 4092-FP. See page 53.	ing	have to 2 pa 2 ad 2 ad 3 pa Ordering Int Box Newels For optional 2 Opp 2 Adj 3 Pan 4392 Box Newels	three option nels opposite e jacent panels (S nels formation for additional p with panels come standa I top panels, add the follo posite Panels – add part r acent Panels – add part r tels – add part number 3 ewel top block accepts fla	each other (180°) 20°) banels: ard with 4 lower panels. wing after product number: number 2180 number 290
e.g. 4092-FP			Top Panel - 90°	2 Top Panel - 180°	3 Top Panel







Panels in Box Newel Bases

BOX NEWELS

Step 4

Customize your Box Newels with Flat or Raised Panels in the base.

- Indicate if you want panels in 1, 2, 3 or 4 sides.
- Specify your stile & rail sizes.
- With Round Sticking, the dimensions must be minimum 1" and with Square Sticking 1¼".

Long Panel Option

4092 Box Newel with long flat panels in shaft, shown with base field cut to 12" height. Flat Panels on a 4092 box newel can accommodate a handrail up to 3%" wide.



with Applied Panel Mouldings

MADE IN THE USA $\star\star\star$

CONTEMPORARY X NEWELS


4630 Series

Oak Pointe introduces a new line of Contemporary Box Newels, in two sizes and 12 different standard designs to choose from! Flat panel options include:

- Stainless Steel 304 Satin #4 finish (grain runs vertically)
- Wood panel same or different species as the newel

Get creative and mix them to achieve the look that you desire.

Choose your sides (any combination)

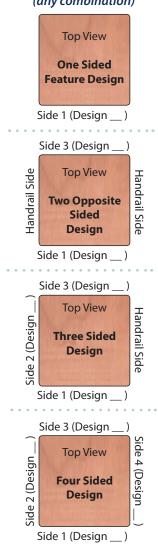

Examples shown with model 4660 Newels




Contemporary Box Newels: Standard Oak Pointe features including lock mitered corners, stile & rail construction with true floating panels.* Upper area has solid internal blocking to allow for easy attachment of handrail. Loose internal bottom mounting block included (order your favorite hardware separately).

Endless Combinations Available for Your Custom Creation


2 Box Newel models
12 different standard designs
Choose Box Newel species... then select panel infill between matching, or other wood species, or stainless steel
Sticking... standard Square Sticking or optional Step Sticking
Choice of 2 caps
Image: Contemporary Top
I

*Design series "C2", "C3", "M", "M1" and "T" non-rectangular panels are routed.



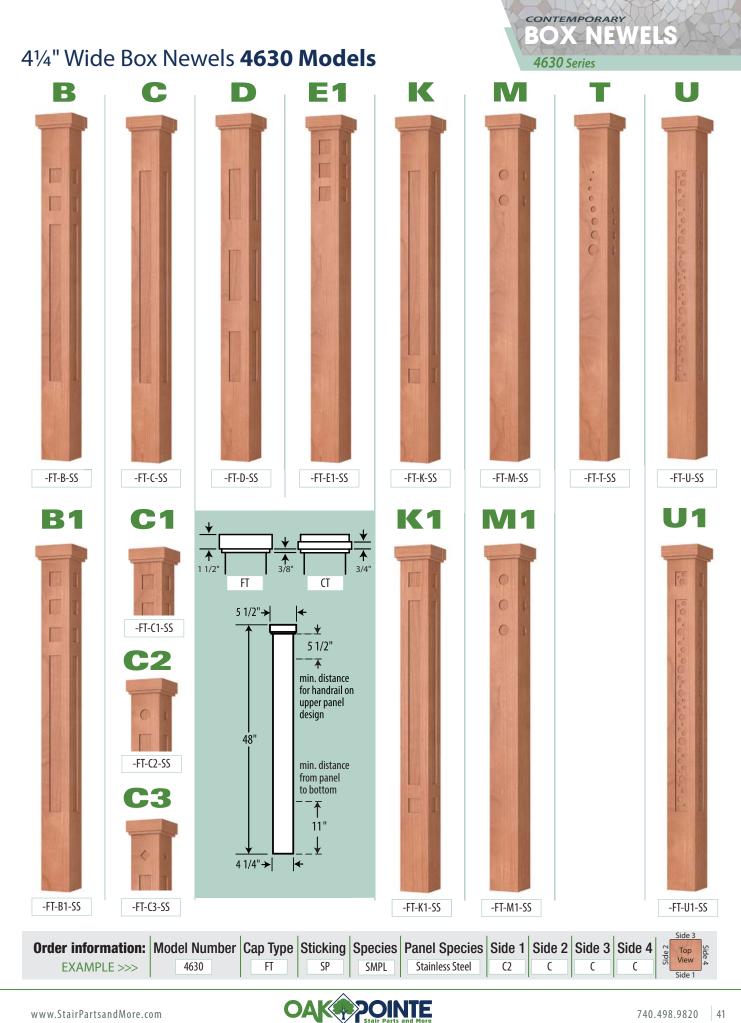



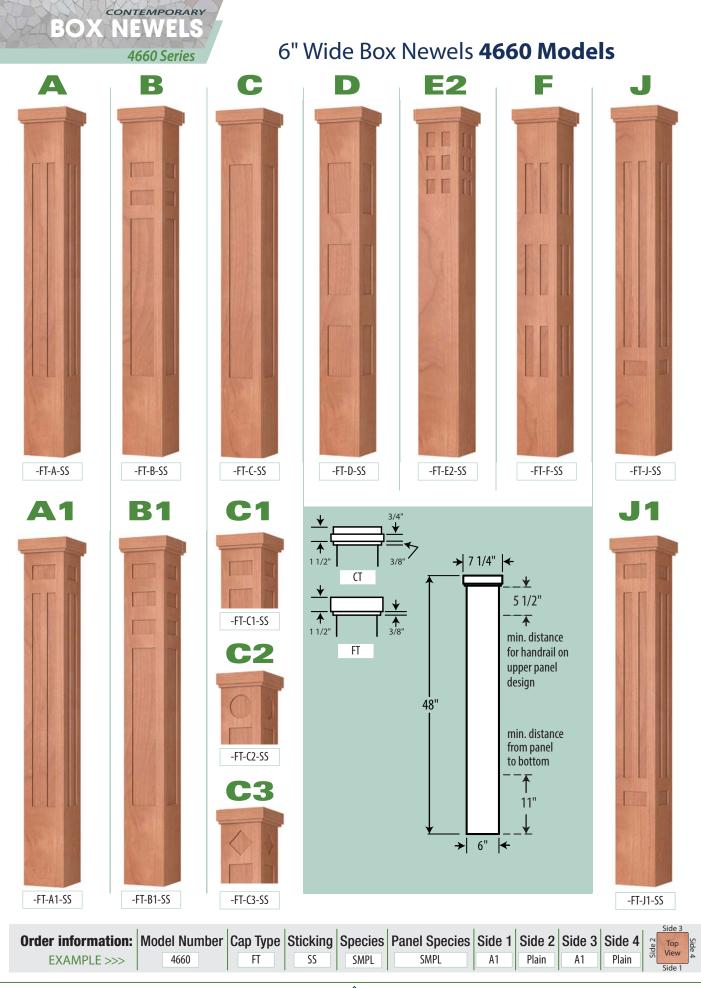



6" Wide Box Newels 4660 Models (continued)

CONTEMPORARY BOX NEWELS 4660 Series







Sticking

Square Sticking and Step Sticking Information

NOTE: Designs U or U1 with stainless steel panels must use step sticking. The wood portion of the U or U1 panels and step sticking will ship loose for field assembly after finishing.



Step Sticking (SP) 1/4" x 1/4"

Wood Species or Stainless Steel Examples







BOX NEWELS

4092T, 4293T, 4294T Series

Made with our standard stile & rail and floating panel construction, these tapered box newels will be a focal point of your staircase.

Addata Sequence Capered SectesImage: state s




4092T Octagon Tapered

4293T Square Tapered Series






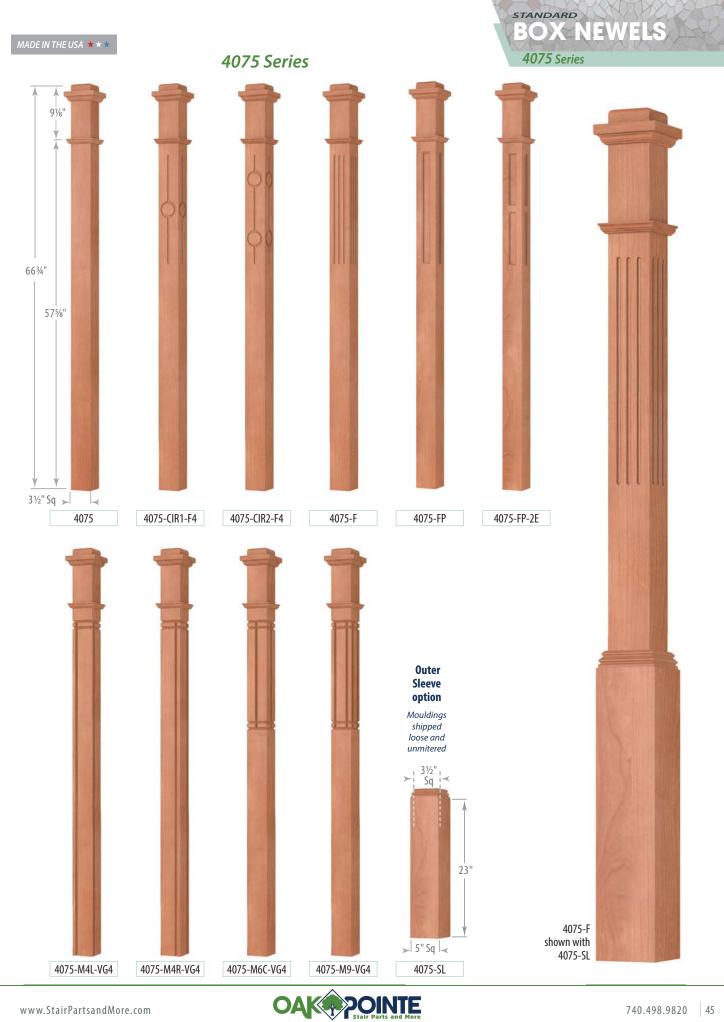

STANDARD BOX NEWELS 4091 Series

4091 Series Box Newels

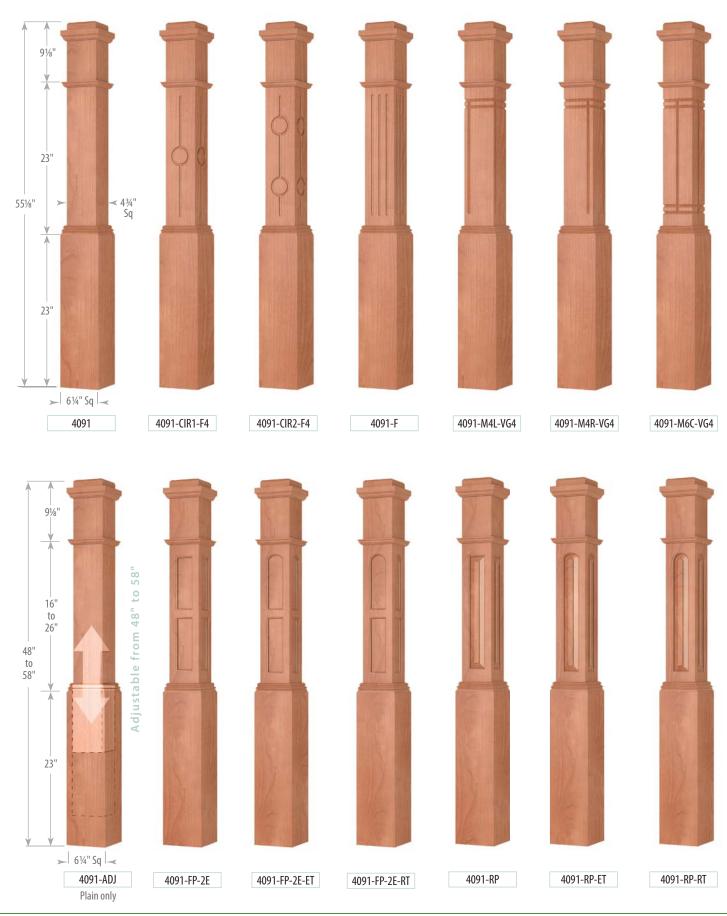





4091 Series Box Newels



BOX NEWELS 4091 Series

Extended Base

Extended Bases for 4091, 4092 and 4291 series Box Newels are available for side mounting or landing applications. Please specify your requirements.



4091 shown with overall height of 72" and base of 40".







BOX NEWELS

•


•

•

•

•

Box Columns

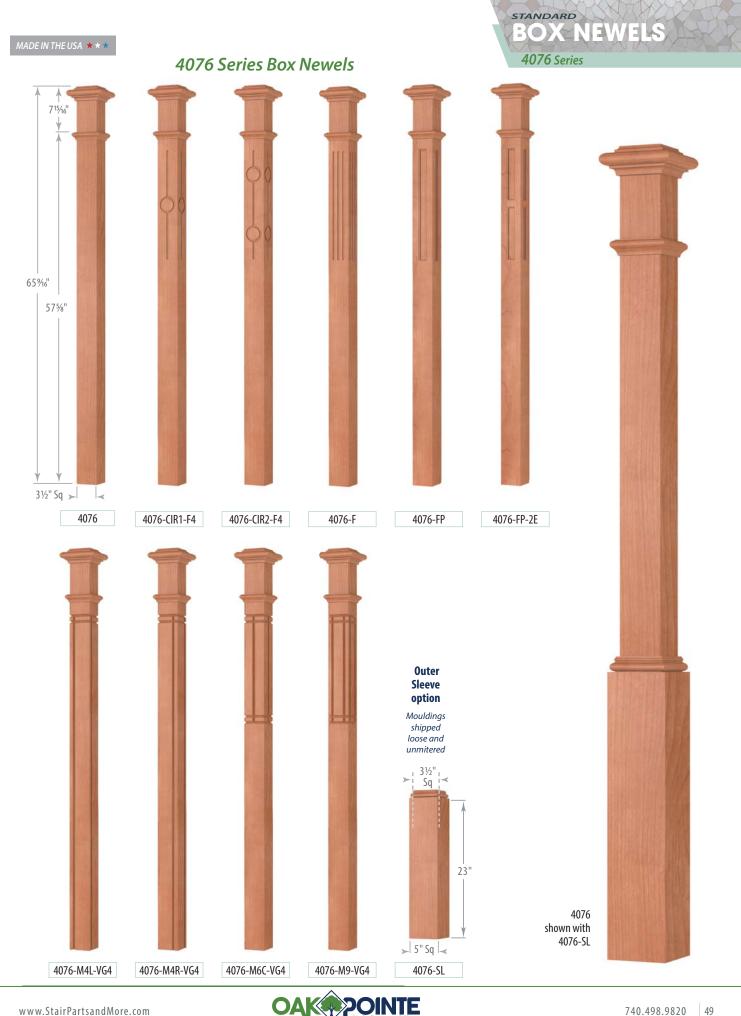


BOX NEWELS 4291 Series

4291 Series Box Newels

7 ¹⁵ / ₁₆ " 23" 53 ¹⁵ / ₁₆ " 23" 23" 53 ¹⁵ / ₁₆ " 4 ³ / ₄ " 5 ³¹⁵ / ₁₆ " 4 ³ / ₄ "	4291-CIR1-F4	4291-CIR2-F4	4291-F	4291-M4L-VG4	4291-M4R-VG4	4291-M6C-VG4
4291-FP-2E	1222222222222223333333434344344<	4291-FP-2E-RT	4291-RP	4291-RP-ET	4291-RP-RT	4291-RP-2E



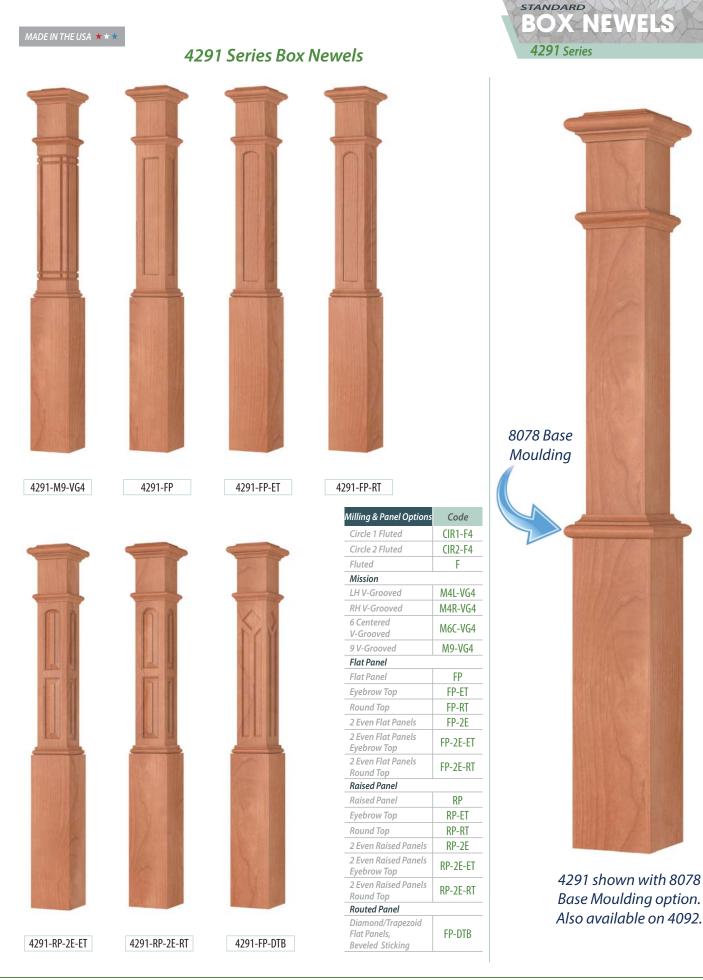



BOX NEWELS 4092 Series

4092 Series Box Newels



7 ¹⁵ / ₆ " 25 ¹ / ₄ " 5 ³ / ₆ " 20" 20" 20" 20" 20" 20" 20" 20" 20" 20	f G" 4092-CIR1-F4	4092-CIR2-F4	4092-F	4092-M4L-V64	4092-M4R-VG4	4092-M6C-VG4
4092-FP-2E	4092-FP-2E-ET	4092-FP-2E-RT	4092-RP	With the second secon	With the second secon	4092-RP-2E





4092 Series Box Newels


MADE IN THE USA $\star\star\star$





CIR1-F4 CIR2-F4 F M4L-VG4 M4R-VG4 M6C-VG4 M9-VG4
F M4L-VG4 M4R-VG4 M6C-VG4
M4L-VG4 M4R-VG4 M6C-VG4
M4R-VG4 M6C-VG4
M4R-VG4 M6C-VG4
M6C-VG4
M9-VG4
FP
FP-ET
FP-RT
FP-2E
FP-2E-ET
FP-2E-RT
RP
RP-ET
RP-RT
RP-2E
RP-2E-ET
RP-2E-RT



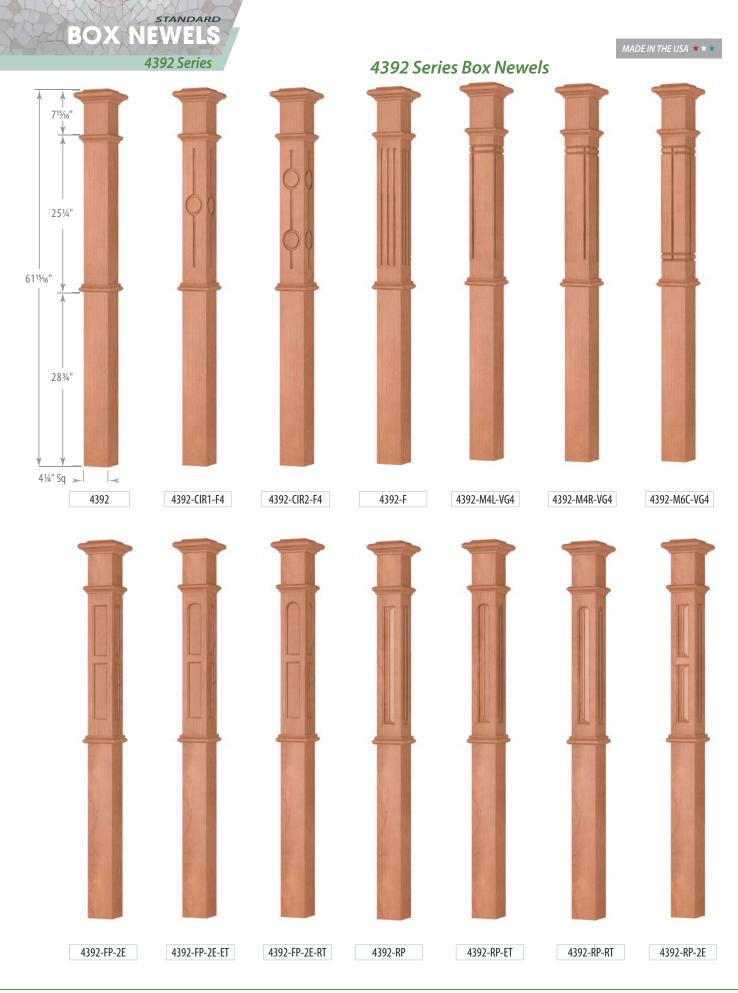



MADE IN THE USA ★ 🕯		92 Series Box	x Newels
4392-M9-VG4	4392-FP	4392-FP-ET	4392-FP-RT Milling & Panel Options Circle 1 Fluted
			Circle 2 Fluted Fluted Mission LH V-Grooved RH V-Grooved 6 Centered V-Grooved 9 V-Grooved Flat Panel Flat Panel Flat Panel Eyebrow Top Round Top 2 Even Flat Panels 2 Even Flat Panels Eyebrow Top
			2 Even Flat Panels Round Top Raised Panel Raised Panel Eyebrow Top Round Top 2 Even Raised Panels Eyebrow Top 2 Even Raised Panels Eyebrow Top 2 Even Raised Panels Round Top Routed Panel Diamond/Trapezoid Flat Panels,
4392-RP-2E-ET	4392-RP-2E-RT	4392-FP-DTB	Beveled Sticking

4392 Series CIR1-F4 CIR2-F4 M4L-VG4 M4R-VG4 M6C-VG4 FP-2E-RT RP-2E-ET Multi-species available for added distinction Metal insert example

Code

F

M9-VG4

FP FP-ET FP-RT

FP-2E

FP-2E-ET

RP RP-ET RP-RT

RP-2E

RP-2E-RT

FP-DTB


STANDARD

BOX NEWELS



STAIR PARTS AND MORE

Home Style...

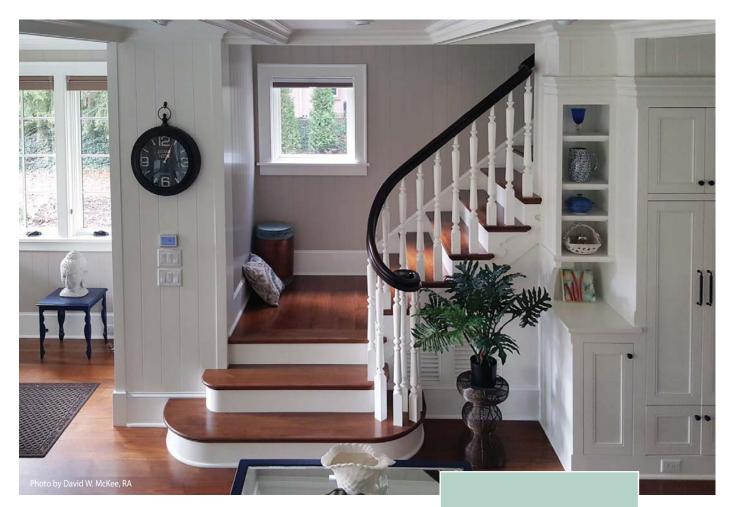

Products included in installation above:

- Custom Balusters
- Handrail- 6109
- Custom Volute with Wreath Arm (see page 263)

With Oak Pointe, our products are designed to complement any decor, in dramatic or subtle fashion.





STAIR PARTS • LEGS • COLUMNS



Our Diamond Collection, designed and manufactured by Oak Pointe, features some of the most exquisite styled products offered for stairways, fireplaces, columns, kitchens and more. All components in this collection are for interior use only.

DIAMOND

Diamond Collection


Custom components are an integral part of our business. Call for pricing on your designs for interior and exterior use.










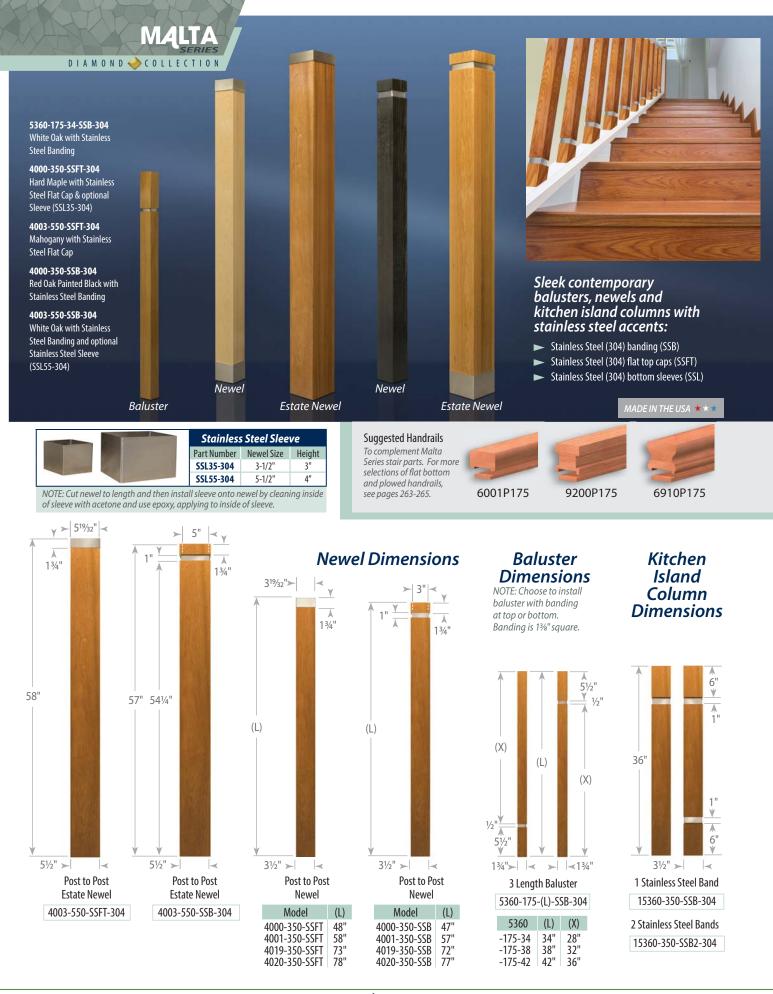




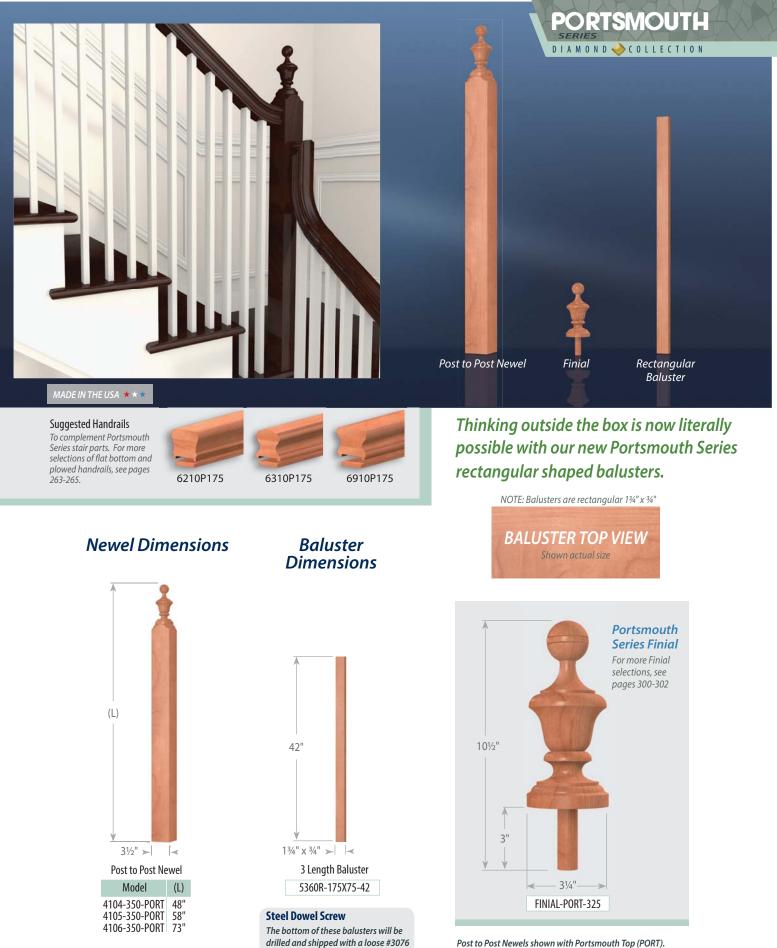


steel dowel screw for installation.

Post to Post Newels shown with Portsmouth Top (PORT). See all Post Top options on pages 300-302.

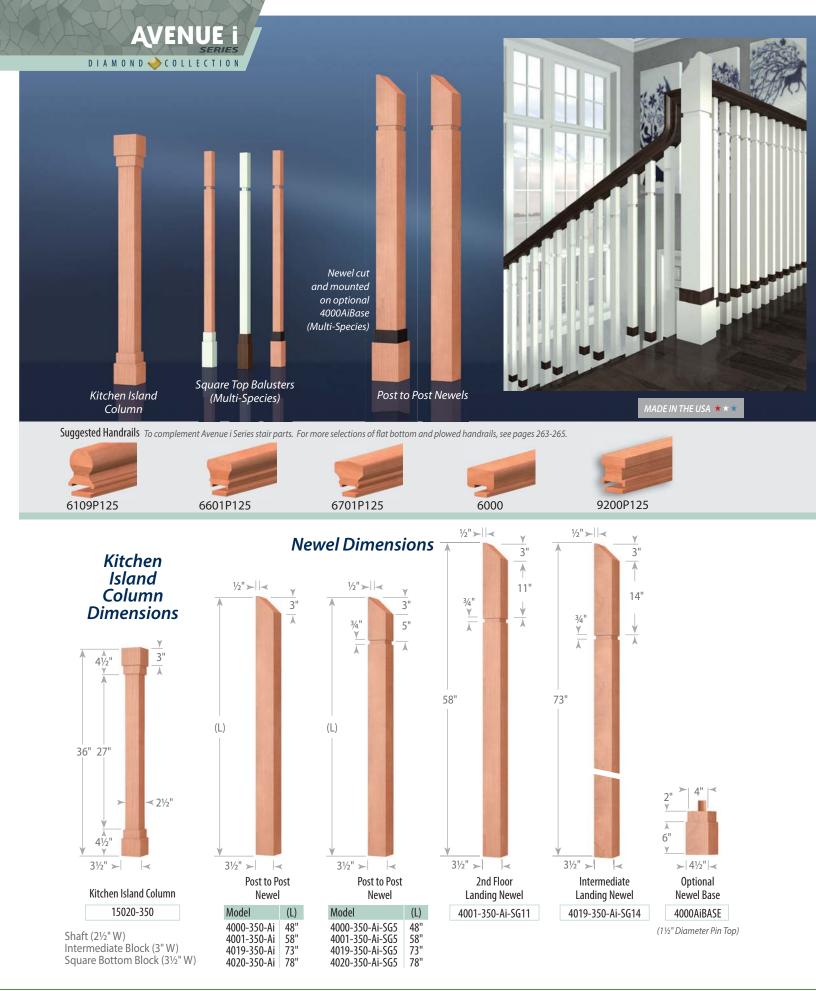




Baluster Dimensions

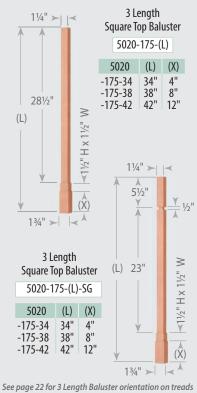



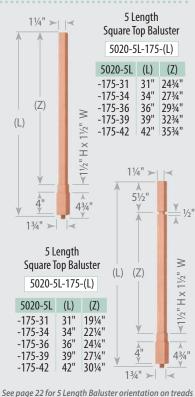

SG

Square Groove

Milling Options

(11/2"W)

(1¾"W)

Cherry & Walnut

Be Creative!

possibilities by mixing

Think of all the

wood grains for a

collection. Select

contemporary look

from this new unique

different wood species... then choose how you

would like to mix them --

shaft, intermediate block

or bottom square block.

Hard Maple & Walnut

Cherry & PTD






AVENUE

DIAMOND 🔶 COLLECTION





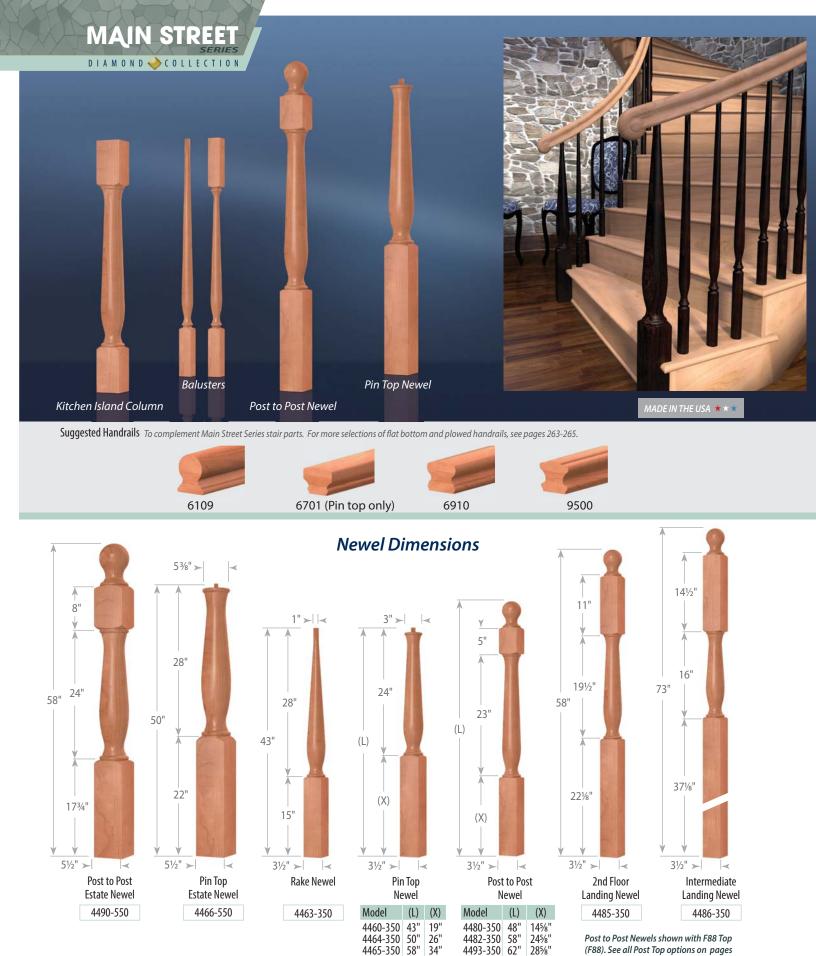

Post to Post Newels shown with F88 Top (F88). See all Post Top options on pages 300-302.

24%"

285%"

395%"

445%"


4493-350 62" 4495-350 73"

4498-350 78"



4467-350 65" 41" 4468-350 73" 49"

4465-350 58"

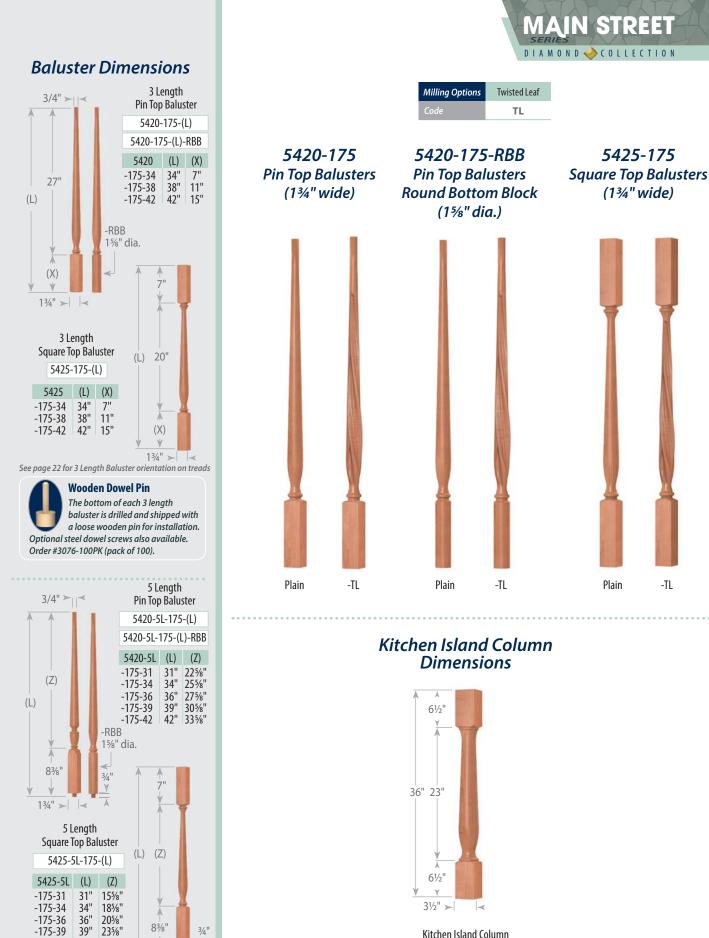

Kitchen Island Column 15425-350



See page 22 for 5 Length Baluster orientation on treads


42" 26%"


1¾" > ▲

-175-42





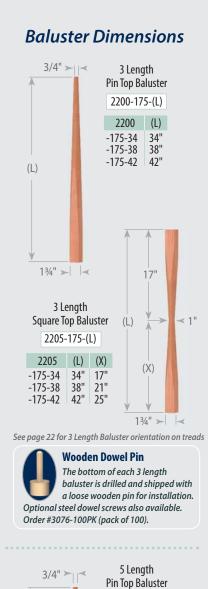

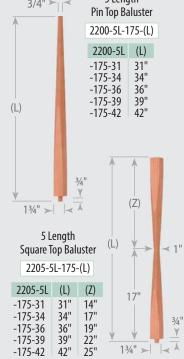


See page 22 for 5 Length Baluster orientation on treads





Milling Options	Fluted 1
Code	F1

2200-175 Pin Top Balusters (1³/₄" wide)

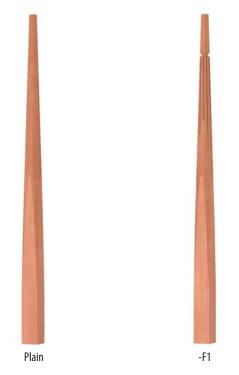

2205-175 Square Top Balusters (1³/₄" wide)

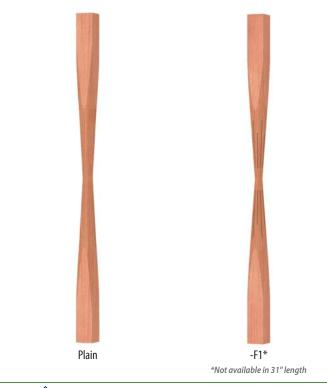

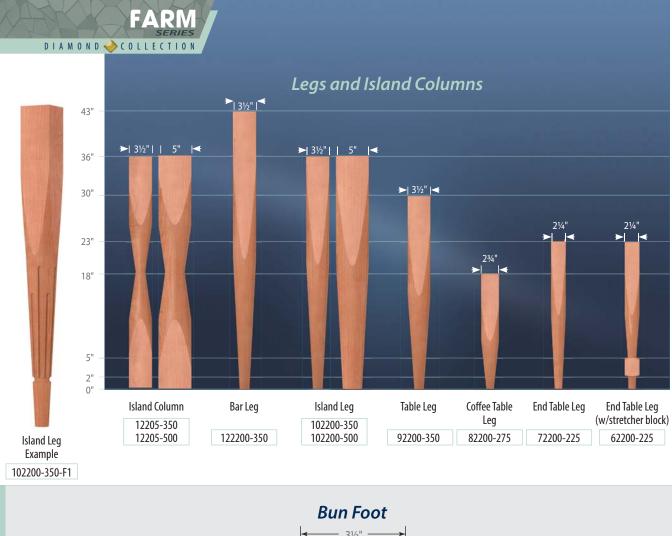








MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Fluted 1	F1						




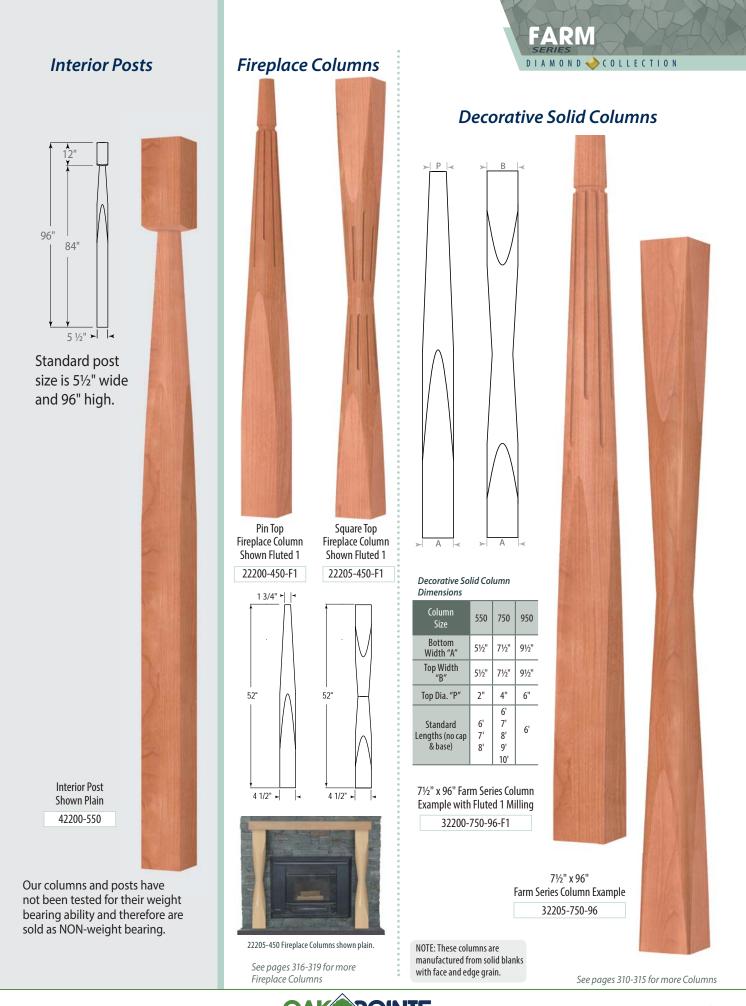





Baluster Dimensions

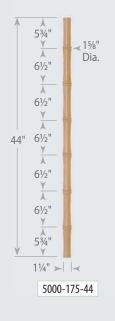



Use one baluster style for a uniform look or for a random pattern trim top and bottom as desired or mix and match both styles.


5000-175 5001-175 Pin Top and Bottom Balusters



4200-725 Estate Newel Standard 8 panel detail (Estate Newel only)

EMPEROR


DIAMOND 🔶 COLLECTION

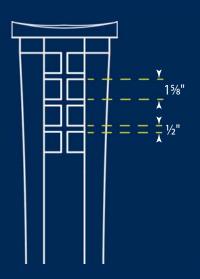








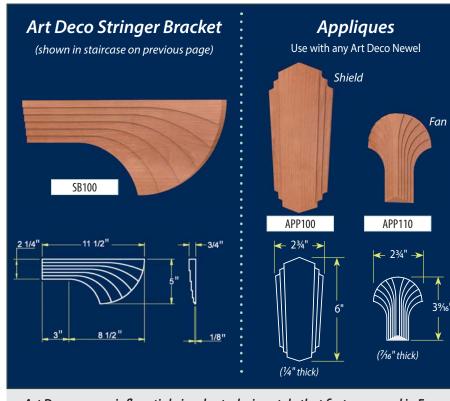




Milling Options	Art Deco 5	Art Deco 6		
Code	AD5	AD6		


Kitchen Island Column Dimensions

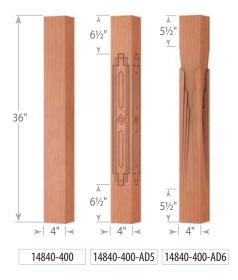

Art Deco was an influential visual arts design style that first appeared in France just before World War I and began flourishing internationally in the 1920s, 1930s and 1940s. Oak Pointe is restoring the nostalgia of the roaring 20's appeal into the 2020's with our Art Deco Series of stair parts and accents.

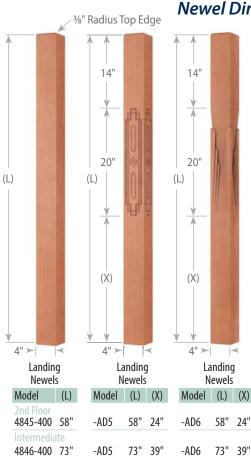


Newel Dimensions

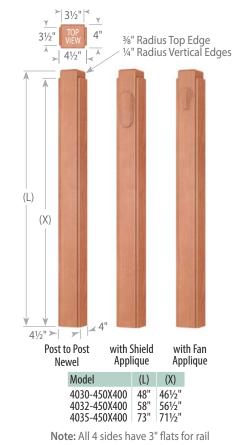

Milling Option Detail





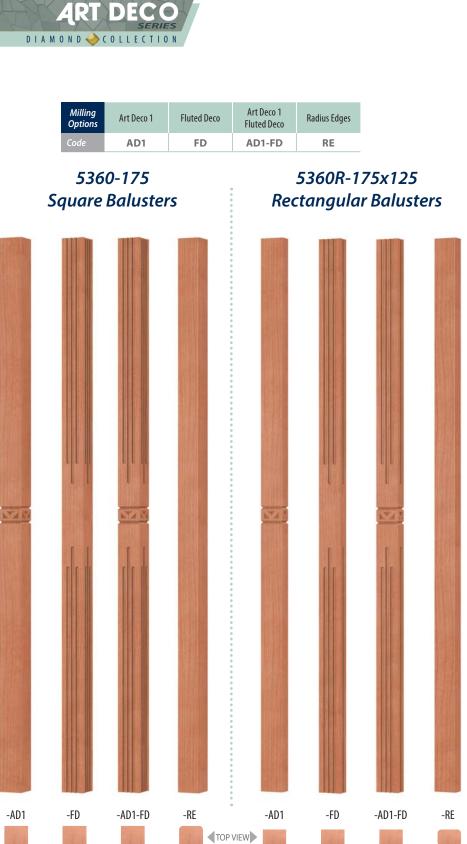


Baluster Dimensions








Estate and Grand Estate Newel Dimensions

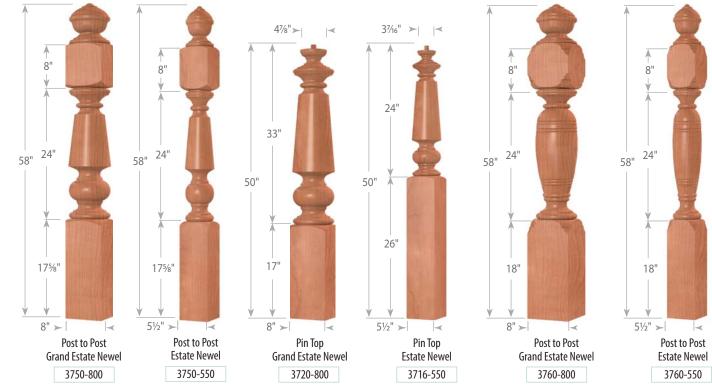

Post to Post Newels shown with Victoria Top (VIC). See all Post Top options on pages 300-302.



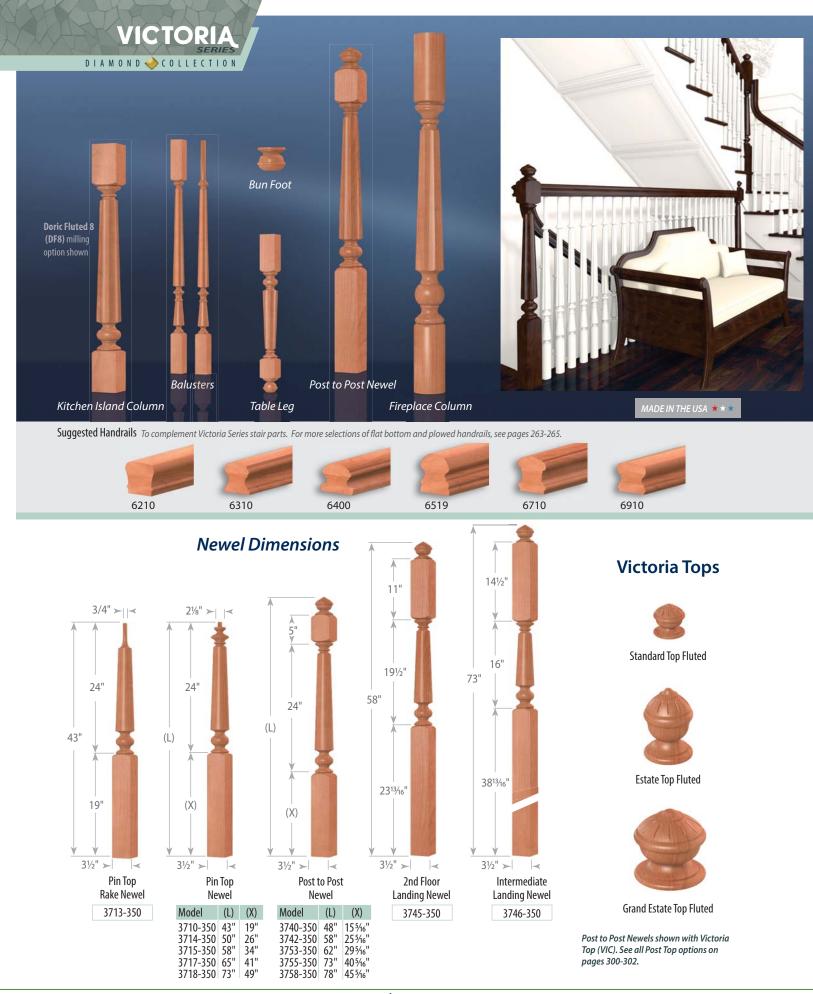








See page 22 for 5 Length Baluster orientation on treads

VICTORIA SERIES DIAMOND COLLECTION

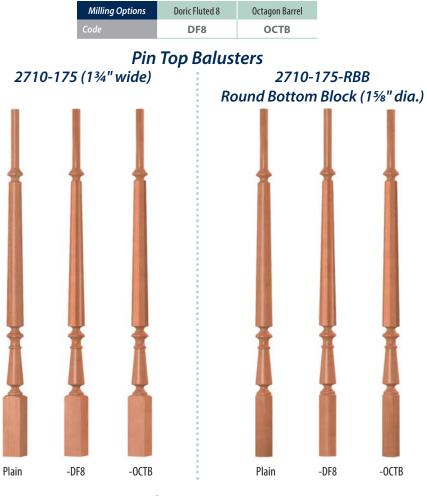

Square Top Balusters 2715-175 (1³/₄" wide)









Enhance our Victorian Series or any old world French decor with these unique Box Newel and Baluster designs.

Victorian design is widely viewed as having indulged in a grand excess of ornamentation. The box newels and balusters on this page will add an even more eclectic interpretation to your decor.

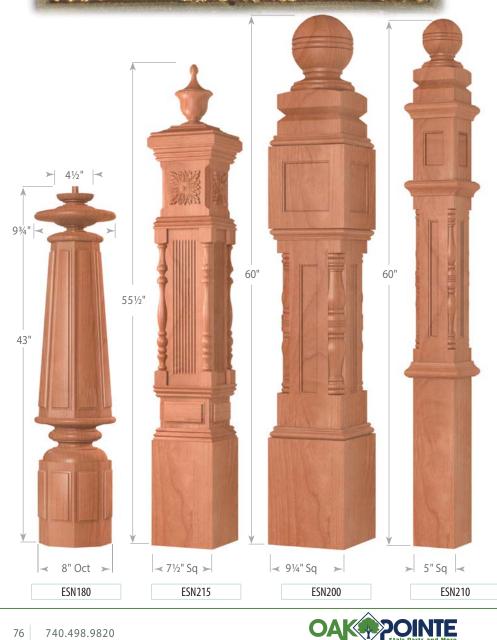



Baluster lengths may be ordered to fit your requirements. Available in 3 or 5 lengths.



See page 22 for 3 Length Baluster orientation on treads

VICTORIA SERIES DIAMOND COLLECTION



Victoria Series Bun Foot For more Bun Feet selections, see pages 298-299.

Milling Options

MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Doric Fluted 8	DF8						
Fluted*	F						
Octagon Barrel	оств						

*3760 Series only



ОСТВ

DF8


Milling Options Details Name

Code *3760 Series only 12715-800-DF8

13760-800-F

F



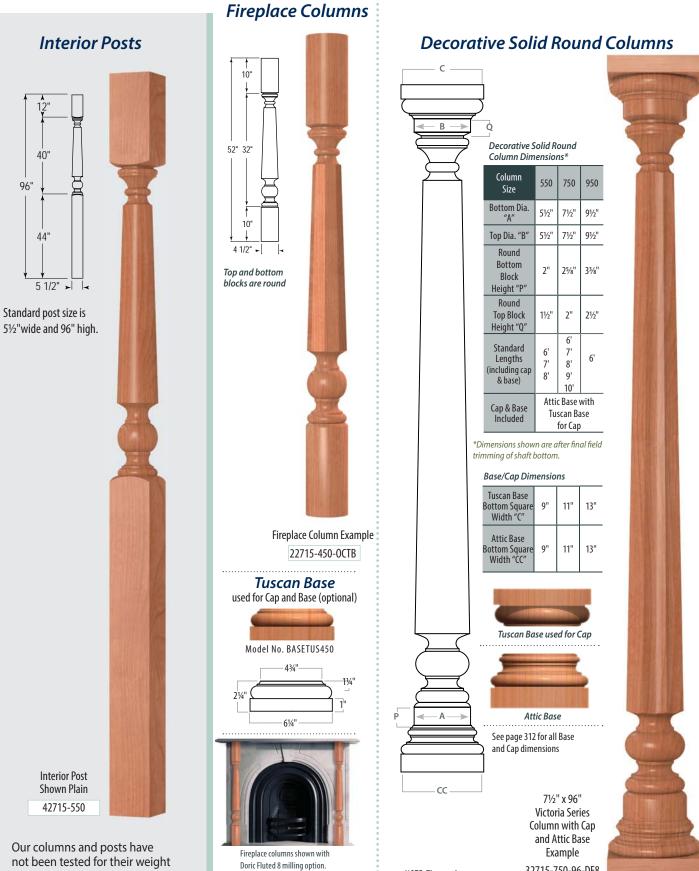

Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.

See pages 316-319 for more

Fireplace Columns


NOTE: These columns are

with face and edge grain.

manufactured from solid blanks



32715-750-96-DF8

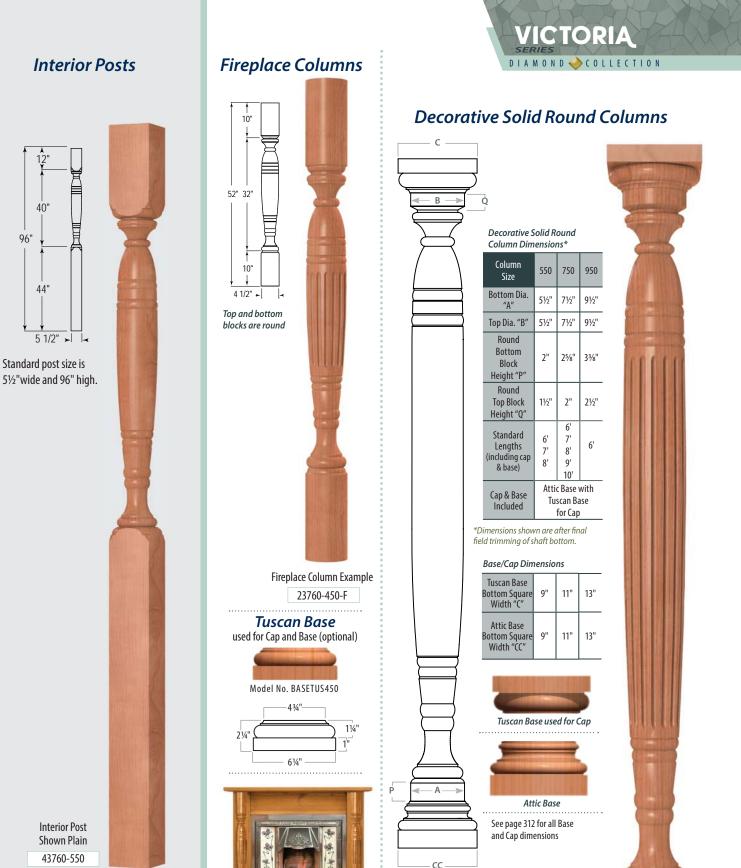

Fireplace Columns shown with Fluted milling

See pages 316-319 for more

Fireplace Columns

option.

Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.

See pages 310-315 for more Columns

71/2" x 96"

Victoria Series Column with Cap

and Attic Base


Example

33760-750-96-F

NOTE: These columns are

with face and edge grain.

manufactured from solid blanks

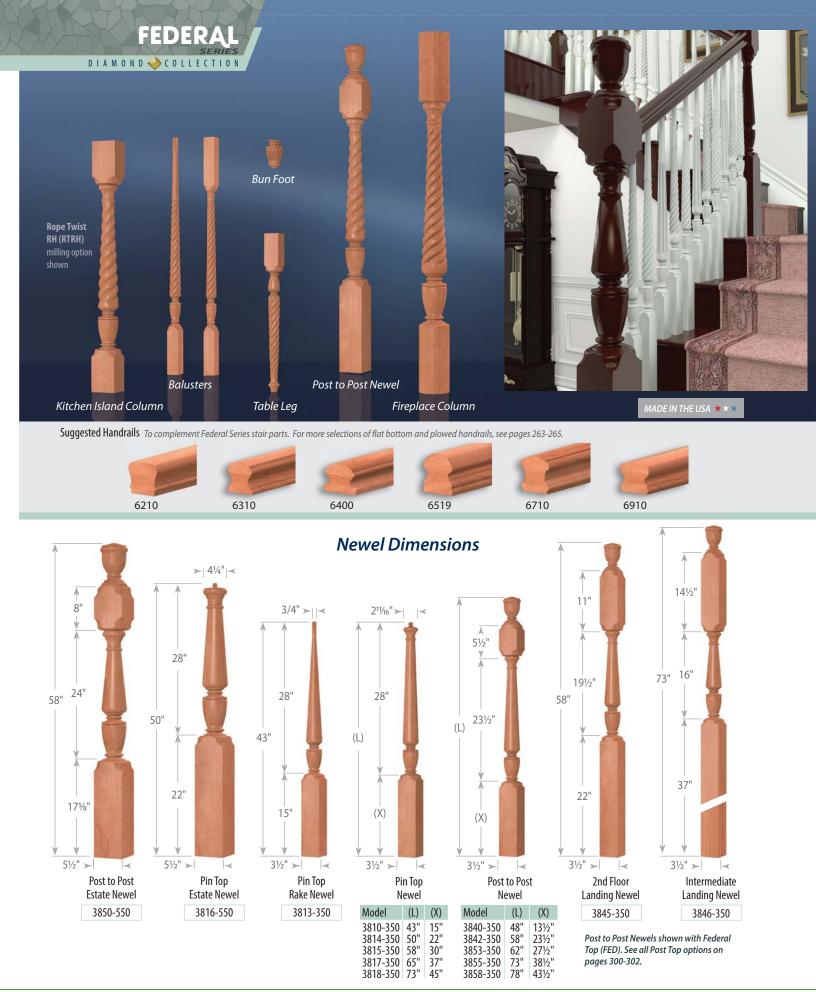



Baluster Dimensions



See page 22 for 5 Length Baluster orientation on treads


FEDERAL SERIES DIAMOND COLLECTION

Milling Options	Fluted	Reeded	Rope Twist (LH)	Rope Twist (RH)	Twist
Code	F	R	RTLH	RTRH	TW


2800-175 Pin Top Balusters (1³/₄" wide)



2805-175 Square Top Balusters (1³/₄" wide)

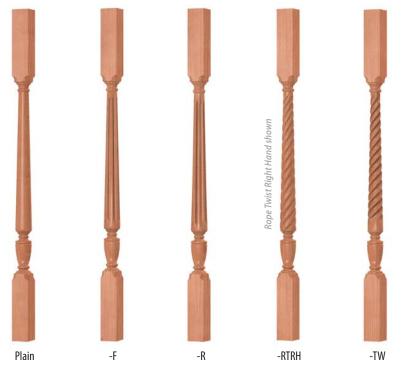



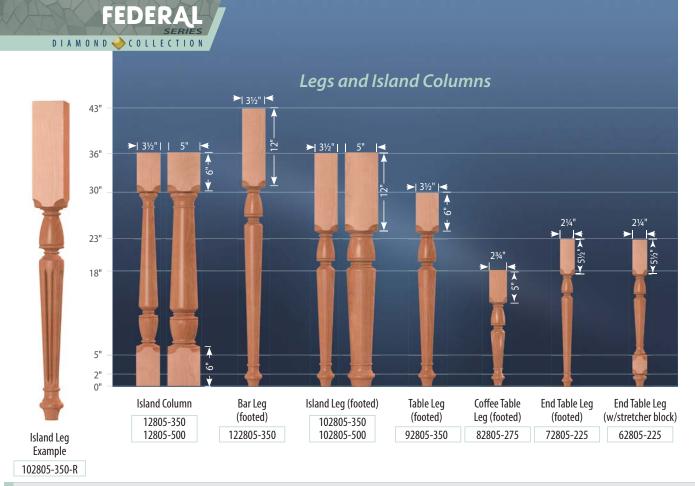




Columns, Legs and Bun Feet Milling Options


						MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
				1	8	Fluted	F						 ✓
Milling Options Details				1	0	Reeded	R						 Image: A second s
Details				1	1	Dana Turiat	RTLH						\checkmark
			Popo	Popo		Rope Twist	RTRH						\checkmark
Name	Fluted	Reeded	Rope Twist (LH)	Rope Twist (RH)	Twist	Turint	T14/						
Code	F	R	RTLH	RTRH	ΤW	Twist	TW	✓					



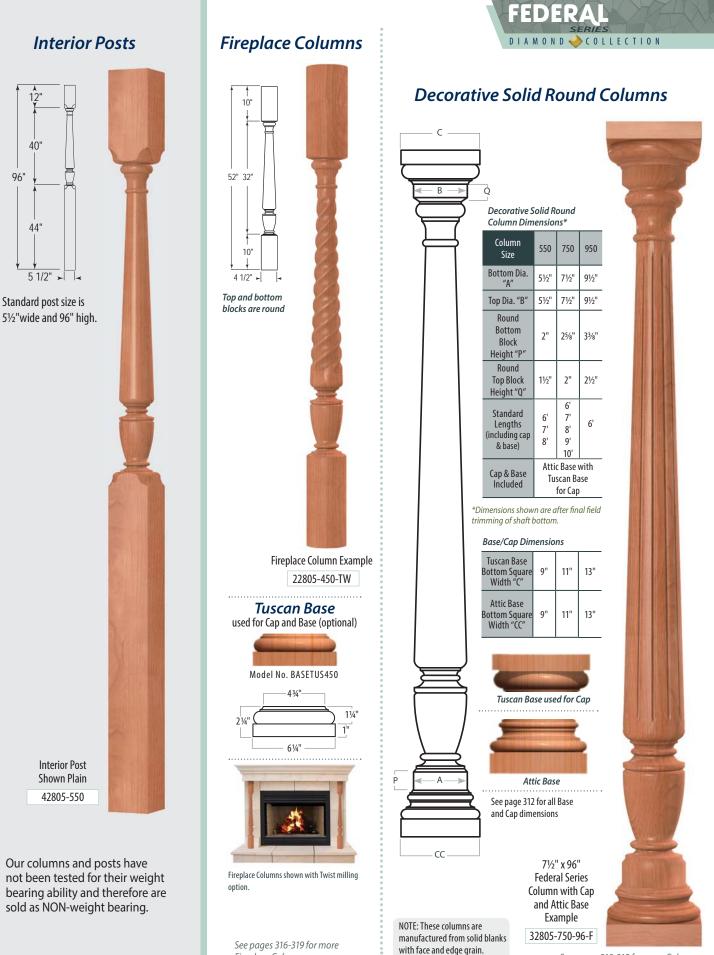

See pages 310-315 for more Columns

Fireplace Columns

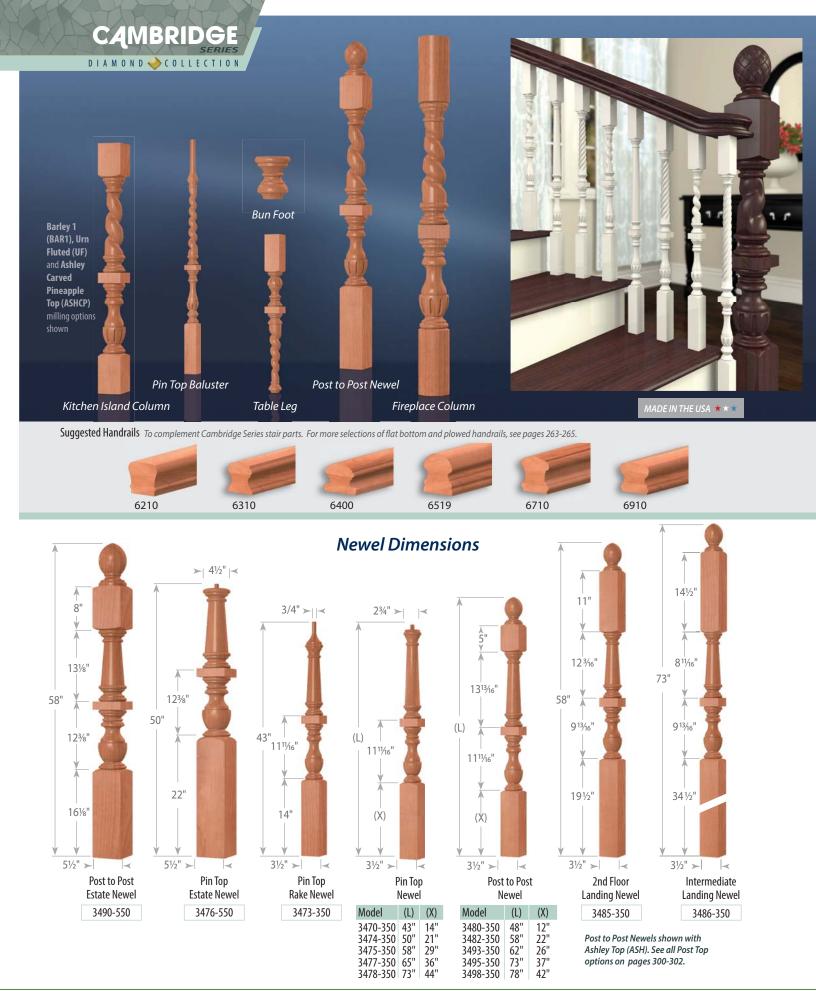



CAMBRIDGE DIAMOND 🔶 COLLECTION


Baluster Dimensions



Milling Options	Barley 1	Fluted	Reeded	Rope Twist (LH)	Rope Twist (RH)	Tulip Reeded	Twist	Urn Fluted	Urn Reeded	Urn Twisted
Code	BAR1	F	R	RTLH	RTRH	TR	тw	UF	UR	UT



2415-175 Square Top Balusters (1³/₄" wide)

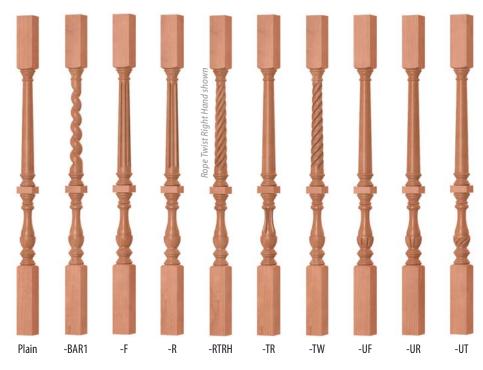



(Z)

8 ½" 34"

11 1/2"

36" 13 ½"

Square Top Baluster

2415-5L-175-(L) 2415-5L (L)

-175-31

-175-34

-175-36

-175-39

-175-42

31"

39" 16 ½"

42" 19 1/2" See page 22 for 5 Length Baluster orientation on treads

(L)


83/8"

87/16

1¾" ≻| | < ▲

3⁄4"

Y

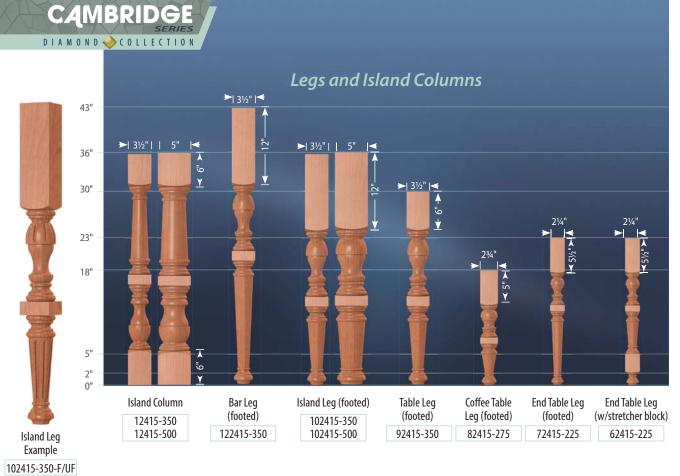




*Not available on 82415 Coffee Table Leg

Columns, Legs and Bun Feet Milling Options

Milling Options Details						Ĭ				
Name	Barley 1	Fluted	Reeded	Rope Twist (LH)	Rope Twist (RH)	Tulip Reeded	Twist	Urn Fluted	Urn Reeded	Urn Twisted
Code	BAR1	F	R	RTLH	RTRH	TR	ΤW	UF	UR	UT



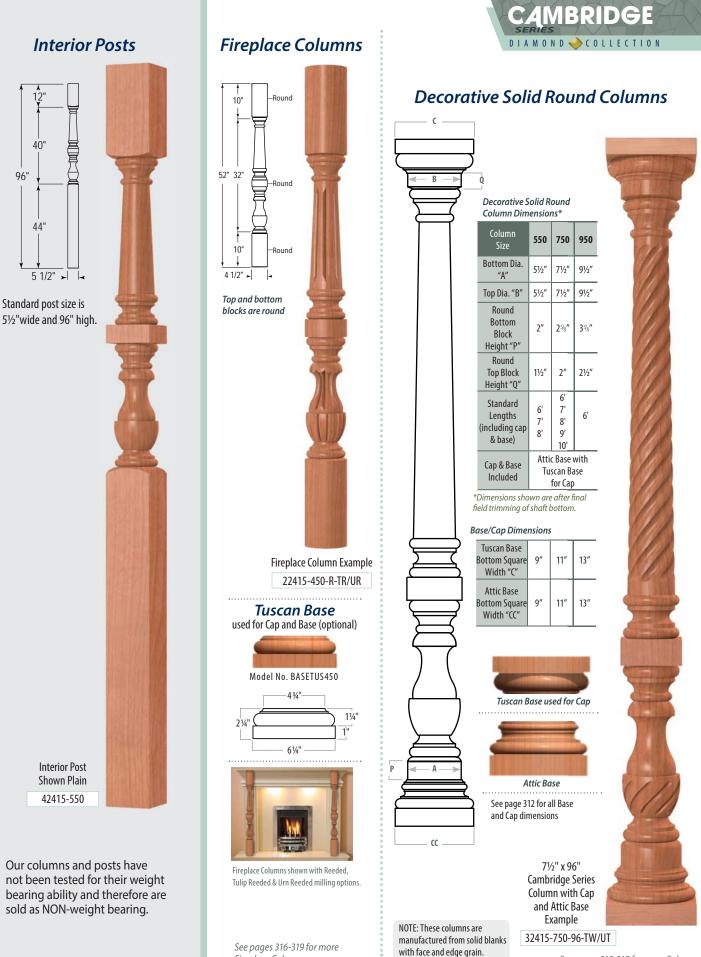


See pages 310-315 for more Columns

www.StairPartsandMore.com

Fireplace Columns

96"

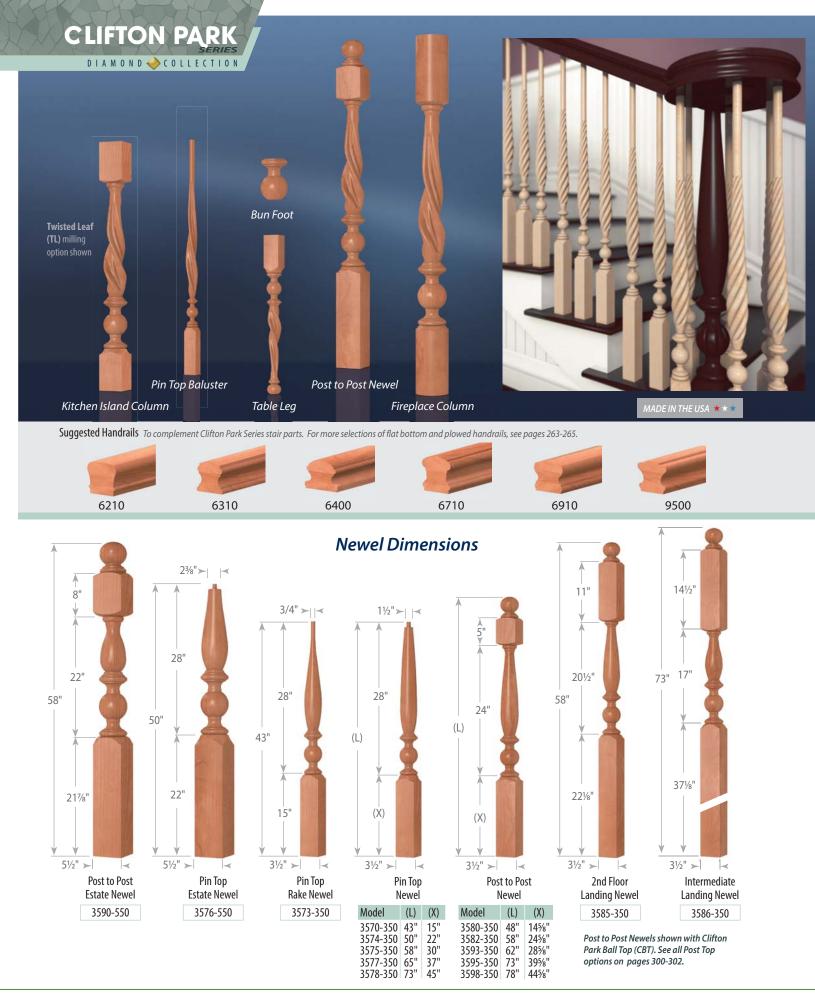



CLIFTON PARK


Baluster Dimensions




See page 22 for 5 Length Baluster orientation on treads

1¾" > | < ▲

Milling Rope Reeded Rope Twist Rope Twist Twisted Pineapple Fluted Reeded Twist 1 Options Ball Ball (LH) (RH) Twist 1 Leaf ΤL TW1 F PB R RB RTLH RTRH RT1

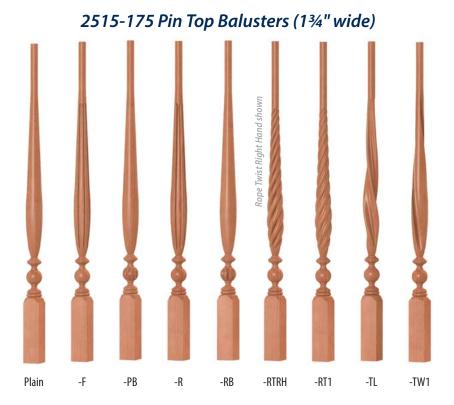

2510-175 Square Top Balusters (1³/₄" wide)

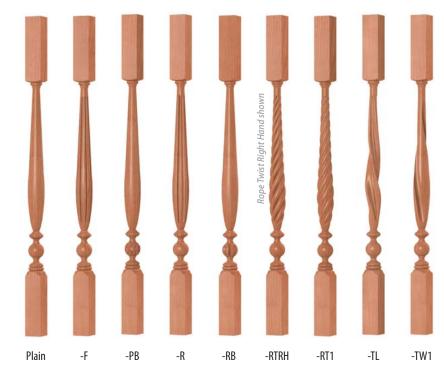



42" 26 5%"

39" 23 5%"

-175-39

-175-42

Legs and Island Columns ▶| 31⁄2" |◄ 43" ▶| 31⁄2"|| 5" 12" 1 ▶| 3½"|| 5" |◀ 36" Ā ¥ ►| 3½" |◀ ▲ Y 30" 12" Y V **≺**5½" ≻ A 23" < 51/2" ➤ 2¾" 18" I ≤ 5" × X 5" 2" 0" Island Column Island Leg (footed) Table Leg **Coffee Table** End Table Leg End Table Leg Bar Leg (footed) (footed) Leg (footed) (w/stretcher block) (footed) 12515-350 102515-350 12515-500 122515-350 102515-500 92515-350 82515-275 72515-225 62515-225 Island Leg Example

102515-350-RTRH

CLIFTON PARK

DIAMOND 🔶 COLLECTION

Bun Feet	≺ 3¾" →
-PB	5%"
-RB	52515 Clifton Park Series Bun Feet For more Bun Feet selections, see pages 298-299.


MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Fluted	F						
Pineapple Ball	РВ		1		1	1	
Reeded	R		1		1	1	
Reeded Ball	RB	1	1	1	1	1	1
Dana Turiat	RTLH	1	1		1	1	 ✓
Rope Twist	RTRH	1	 ✓ 		 ✓ 	1	1
Rope Twist 1	RT1		1		1	1	
Twisted Leaf	TL		✓ *		1	1	
Twist 1	TW1	1	1		1	1	


*Not available on 82515 Coffee Table Leg

Columns, Legs and Bun Feet Milling Options


Milling Options Details									
Name	Fluted	Pineapple Ball	Reeded	Reeded Ball	Rope Twist LH	Rope Twist RH	Rope Twist 1	Twisted Leaf	Twist 1
Code	F	P B	R	R B	RTLH	RTRH	RT1	TL	T W 1



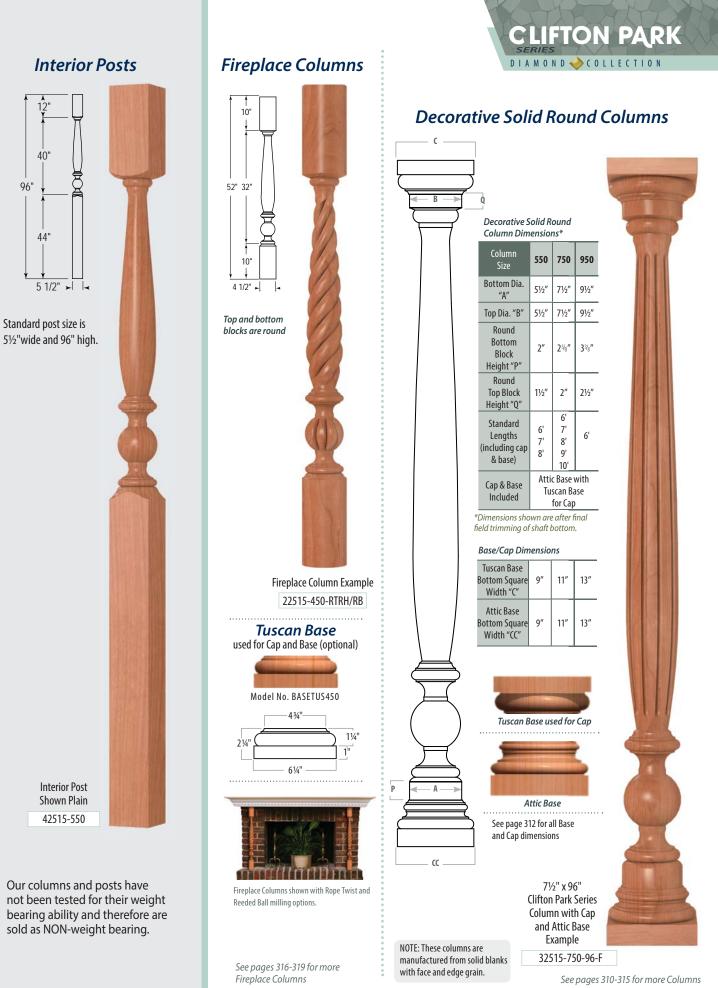

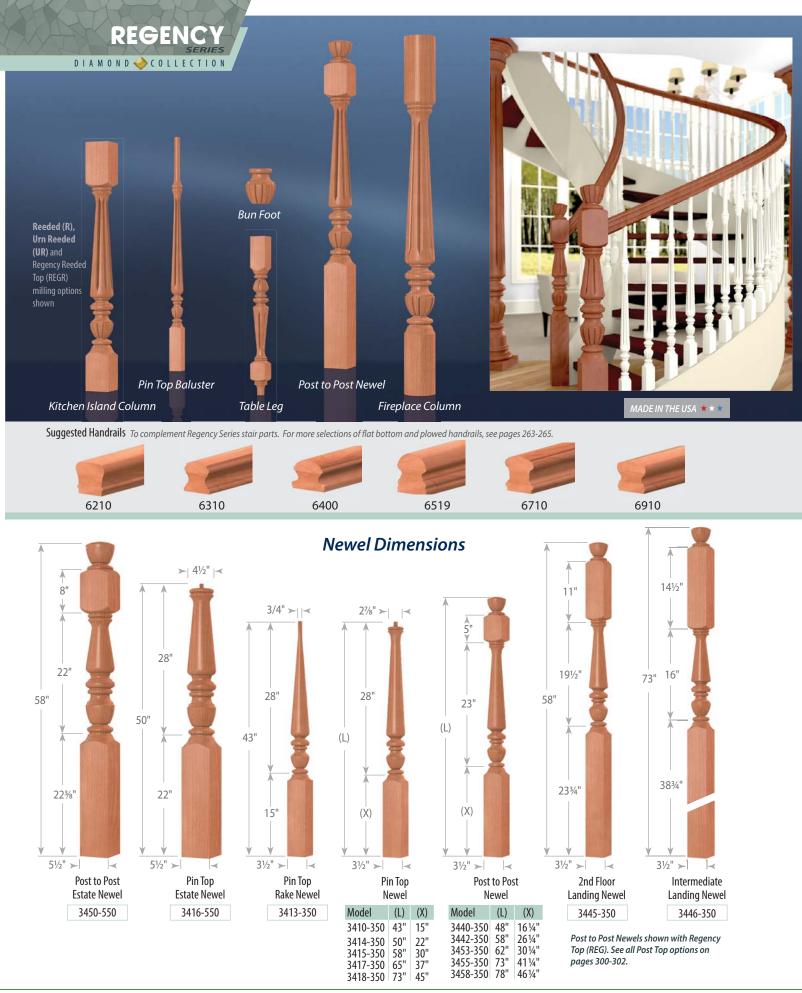



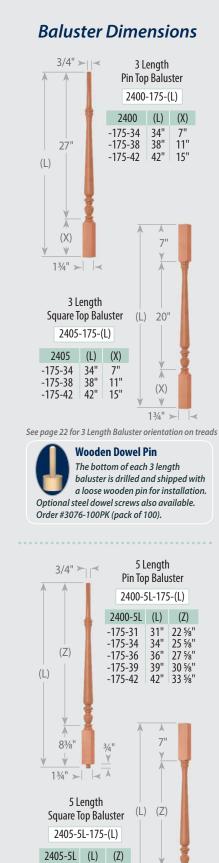

		Milling Options Code	Reeded R	Reeded/ Urn Reeded Urn Reeded R/UR UR			
240	0-175 (134" wid	le)	2405-	-175 (1¾" wie	de)
Pir	n Top B	alusters		Squai	re Top	Balust	ers
Plain	-R	-R/UR	-UR	Plain	-R	-R/UR	-UR



UR Add the Urn Reeded to any Regency part by specifying the suffix UR.

See price list.



31" 15 5/8" 34" 18 5/8"

36" 20 5%" 39" 23 5%"

42" 26 5%"

See page 22 for 5 Length Baluster orientation on treads

83/8"

1¾" ≻| | < ▲

3⁄4"


-175-31

-175-34

-175-36

-175-39

-175-42

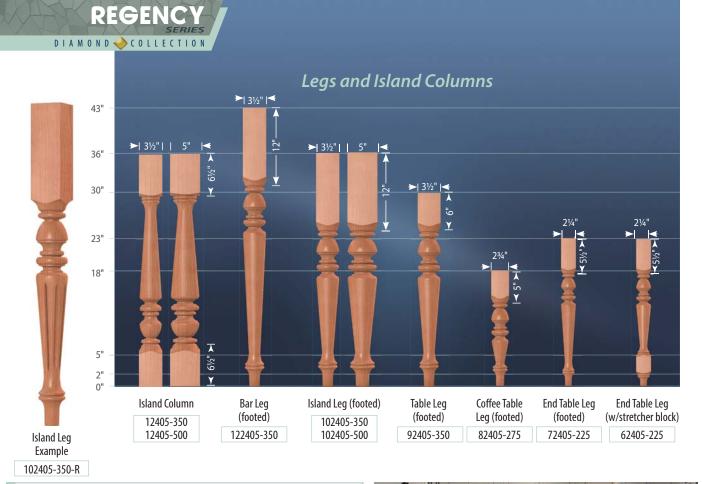



Columns, Legs and Bun Feet Milling Options


Milling Options Details		
Name	Reeded	Urn Reeded
Code	R	U R



Kitchen Island columns painted white to match cabinet finish.

MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Reeded	R						
Reeded/ Urn Reeded	R/UR				1		
Urn Reeded	UR		1	1	1	1	 ✓



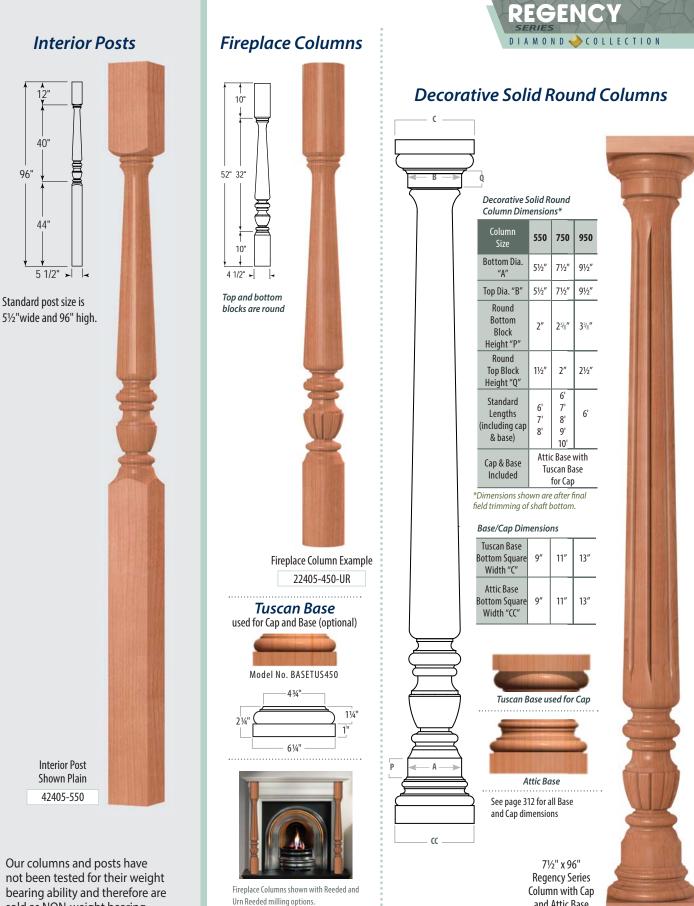

bearing ability and therefore are sold as NON-weight bearing.

> NOTE: These columns are manufactured from solid blanks with face and edge grain.

See pages 310-315 for more Columns

and Attic Base


Example

32405-750-96-R/UR



See pages 316-319 for more

Fireplace Columns

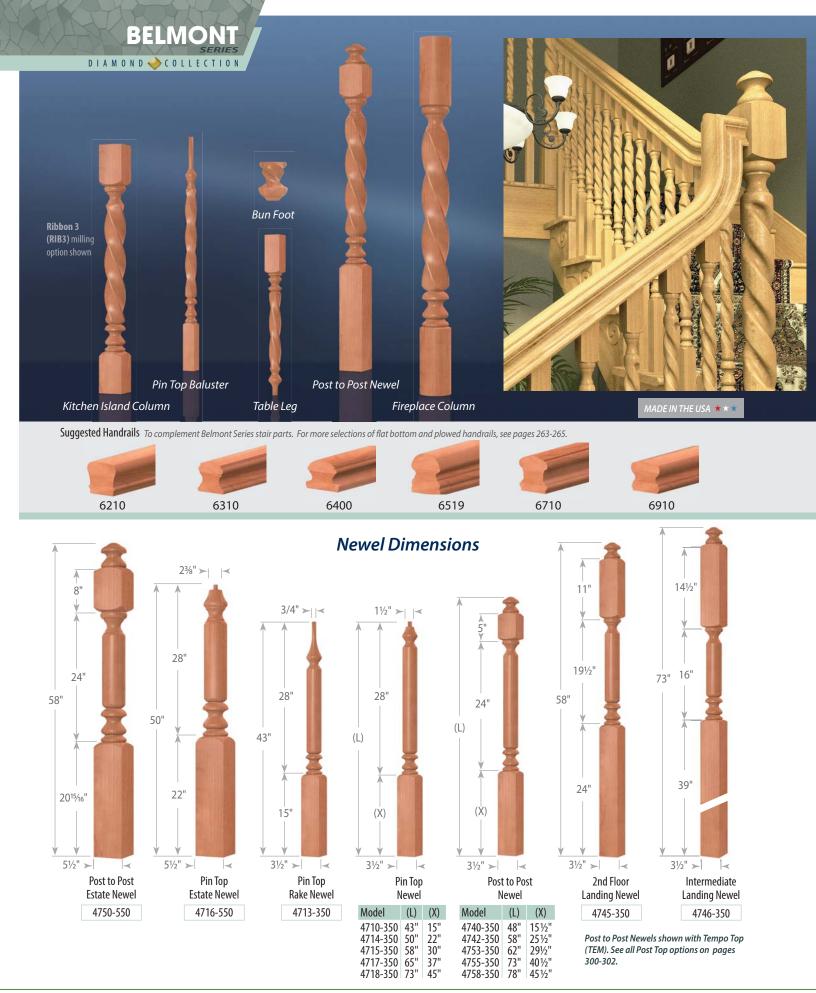



Baluster Dimensions




 Milling Options
 Barley 2
 Fluted
 Reeded
 Ribbon 2
 Ribbon 3
 Rope Twist 2

 Code
 BAR2
 F
 R
 RIB2
 RIB3
 RT2


2700-175 Pin Top Balusters (1³/₄" wide)

BELMONT

DIAMOND 🔶 COLLECTION

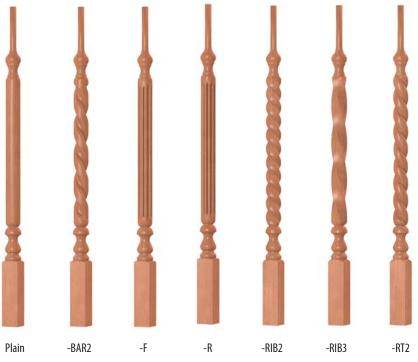

2705-175 Square Top Balusters (1³/₄" wide)

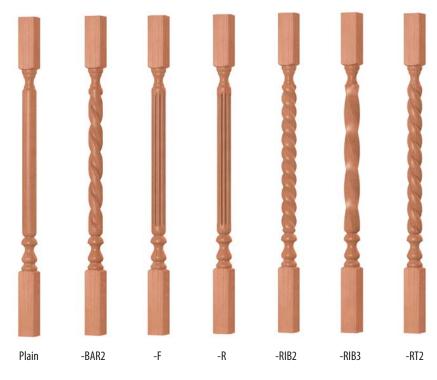



See page 22 for 5 Length Baluster orientation on treads

Legs and Island Columns ▶| 31⁄2" |◄ 43" ▶| 31⁄2"|| 5" 12" 4 ▶| 3½"|| 5" |◀ 36" Ā Ŵ ►| 3½" |◀ Y 30" 12" و" 21⁄4" Y V 4 23" <51/2" > < 51/2"> 2¾" 18" **₹**5") ᠯ 5" و" 2" 0" Table Leg Island Column Island Leg (footed) **Coffee Table** End Table Leg End Table Leg Bar Leg (footed) (footed) (w/stretcher block) Leg (footed) (footed) 12700-350 102700-350 12700-500 122700-350 102700-500 92700-350 82700-275 72700-225 62700-225 Island Leg Example

Bun Feet - 3" \rightarrow 4 -F -R 52700 **Belmont Series Bun Feet** For more Bun Feet selections, see pages 298-299. -RIB2 -RIB3

BELMONT

DIAMOND 🔶 COLLECTION

MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Barley 2	BAR2						
Fluted	F	1	1	1	1	1	 ✓
Reeded	R	1	1	1	1	1	1
Ribbon 2	RIB2	1	1	1	1	1	
Ribbon 3	RIB3	1	1	1	1	1	
Ribbon 4	RIB4						 ✓
Rope Twist 2	RT2	1	 ✓ 		 ✓ 	1	 ✓


*Barley 2 (BAR2) milling option not available for Decorative Columns over 71/2" width




Columns, Legs and Bun Feet Milling Options



102700-350-BAR2

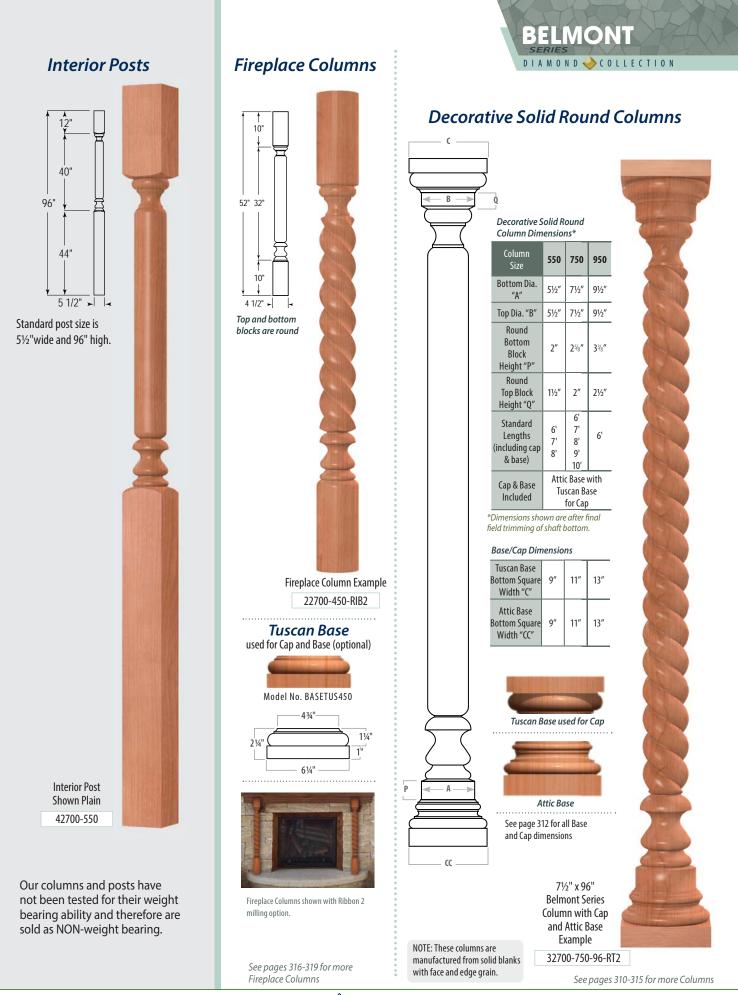

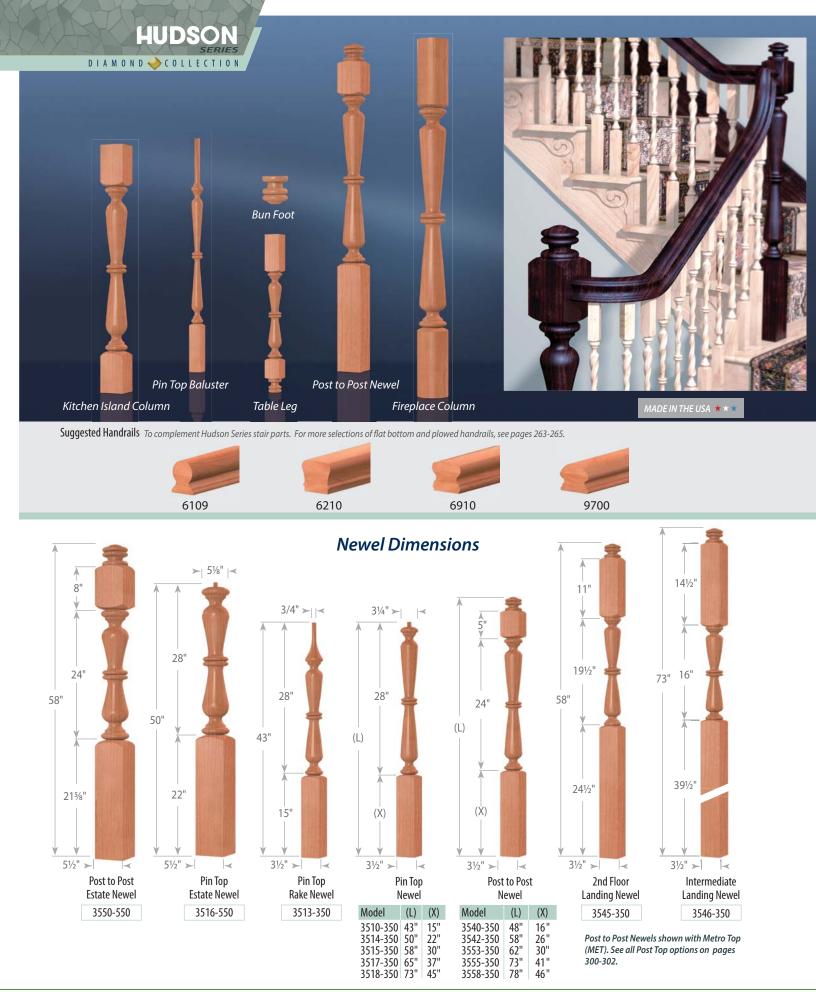



Baluster Dimensions



See page 22 for 5 Length Baluster orientation on treads



HUDSON


2500-175 Pin Top Balusters (1¾" wide)



2505-175 Square Top Balusters (1³/₄" wide)





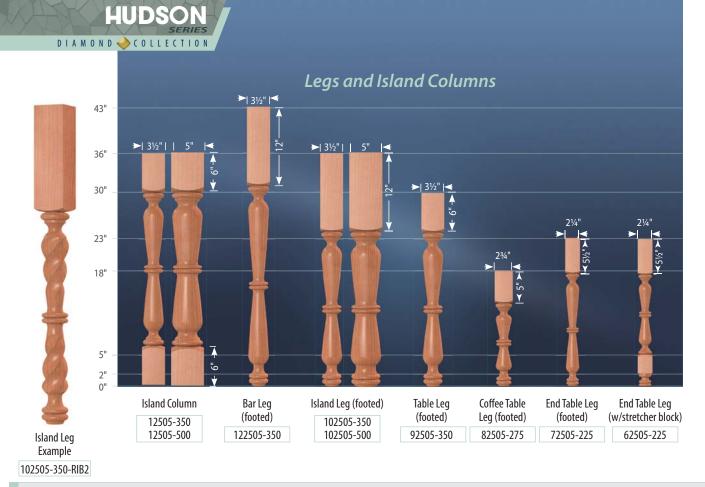







Metro Series Finial For more Finial selections, see pages 300-302.



MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Ribbon 2	RIB2						
Ribbon 3	RIB3						
Ribbon 4	RIB4						




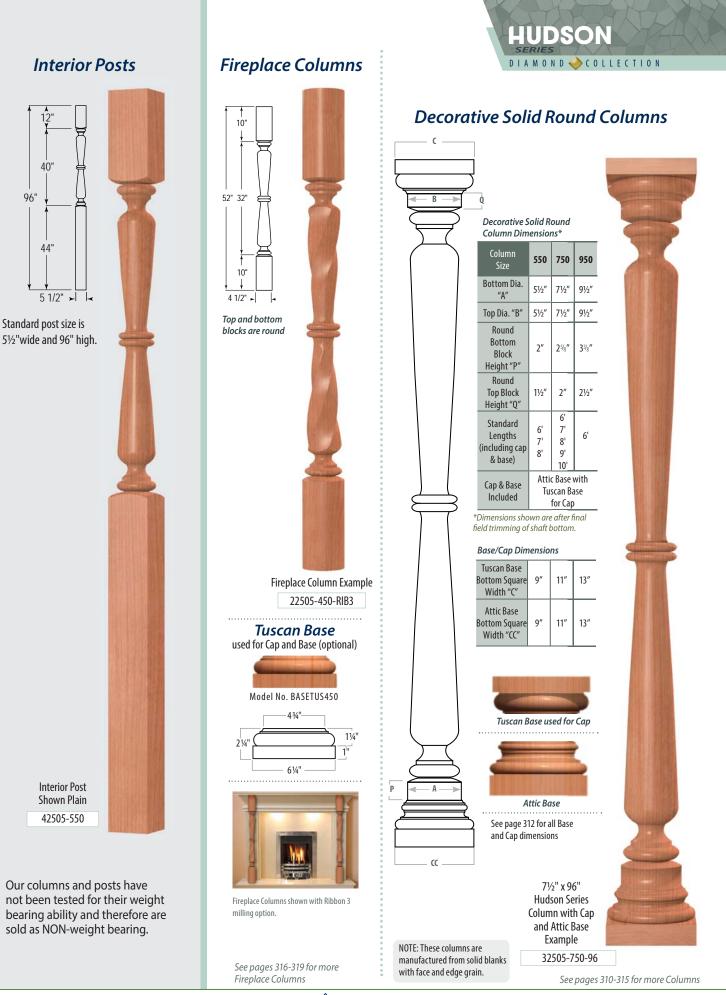

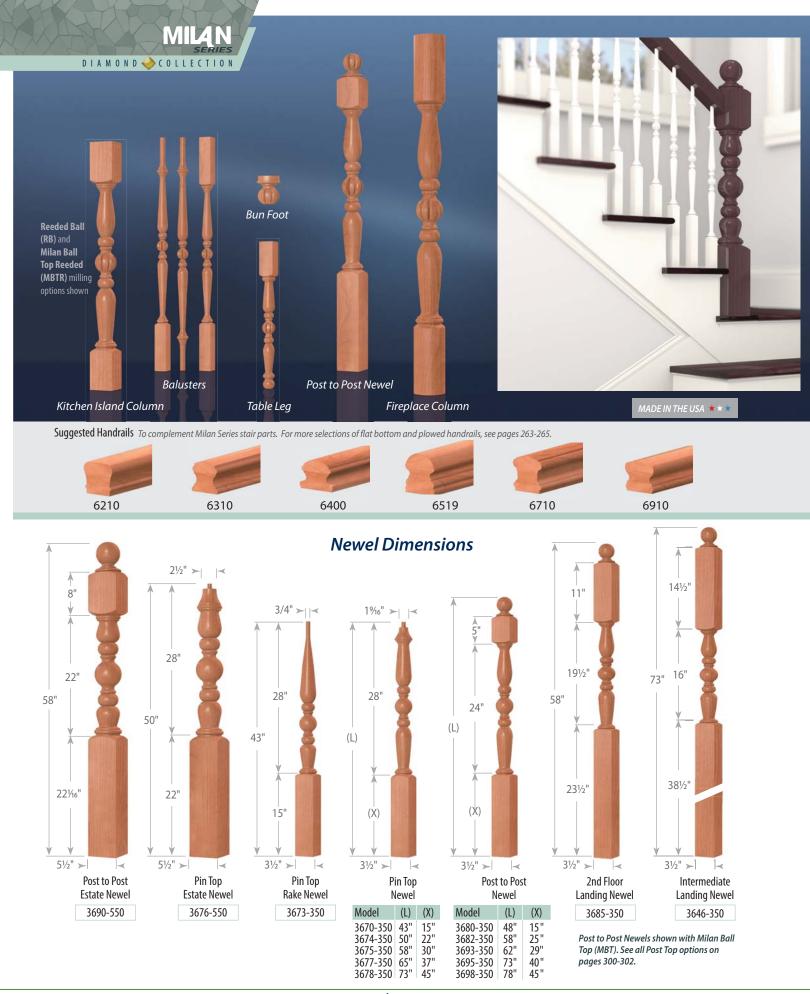




Baluster Dimensions

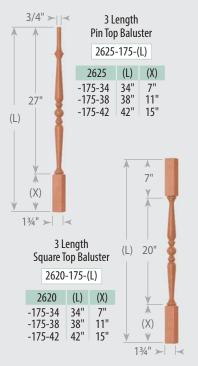

See page 22 for 3 Length Baluster orientation on treads

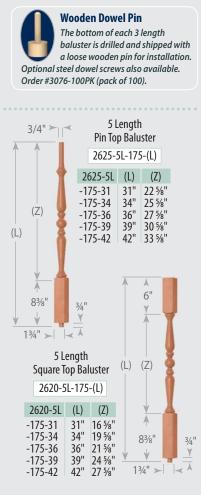

See page 22 for 5 Length Baluster orientation on treads

Milling	Pineapple	Reeded
Options	Ball	Ball
Code	PB	RB

2625-175 (1¾" wide) Pin Top Balusters

Plain


-PB

-RB



Plain -PB -RB

2615-175 (1⅔" dia.)

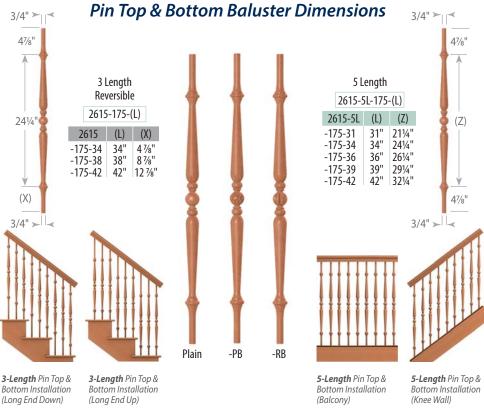

NOTE: Use 2615 3 length (3L) balusters (34", 38" & 42") for open tread applications with long end installed either at the rail or the tread

NOTE: Use 2615 5 length (5L) balusters (31", 34", 36", 39" & 42") for knee wall and balcony (level run) applications



Legs and Island Columns ▶| 31⁄2" |◄ 43" ▶| 31⁄2"|| 5" 1 12 ▶| 3½"| | 5" |◀ 36" .9 Ŵ ۷ ►| 3½" |**▲** 30" 10 * 21⁄4" 23" <51/2" > < 51/2"> 2¾" 18" I ≤ 5" × 4 5" -9 2" 0" End Table Leg (w/stretcher block) Island Column Bar Leg Island Leg (footed) Table Leg **Coffee Table** End Table Leg (footed) (footed) Leg (footed) (footed) 12615-350 102615-350 Island Leg Example 122615-350 92615-350 82615-275 12615-500 102615-500 72615-225 62615-225





MILAN

DIAMOND 🔶 COLLECTION




Milling Options Details		
Name	Pineapple Ball	Reeded Ball
Code	P B	R B



MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Pineapple Ball	РВ						
Reeded Ball	RB						




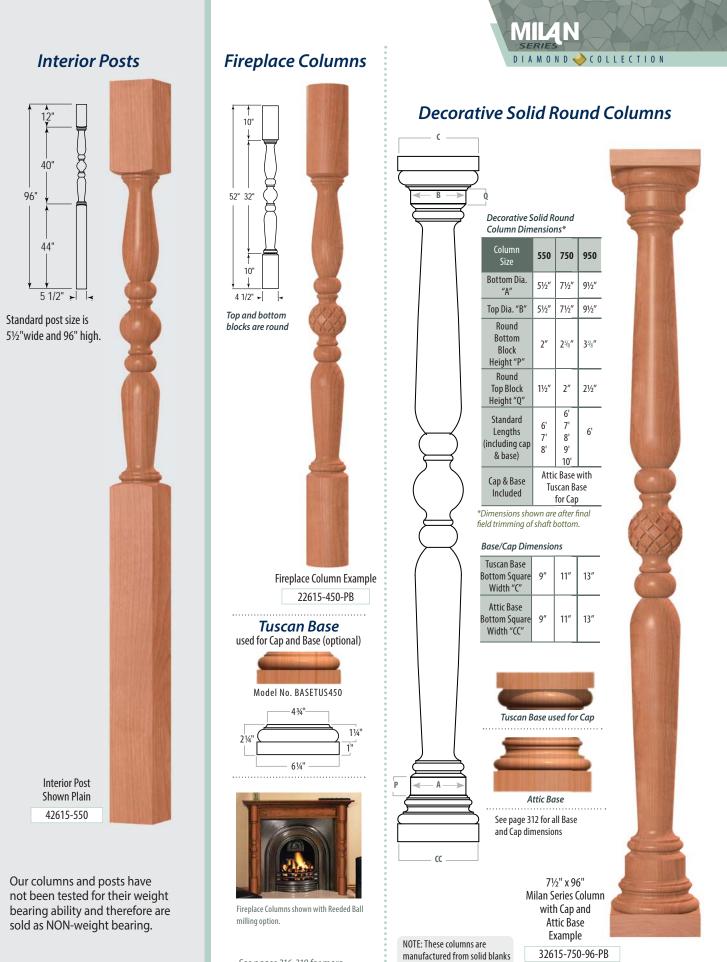

See pages 316-319 for more Fireplace Columns

with face and edge grain.

See pages 310-315 for more Columns

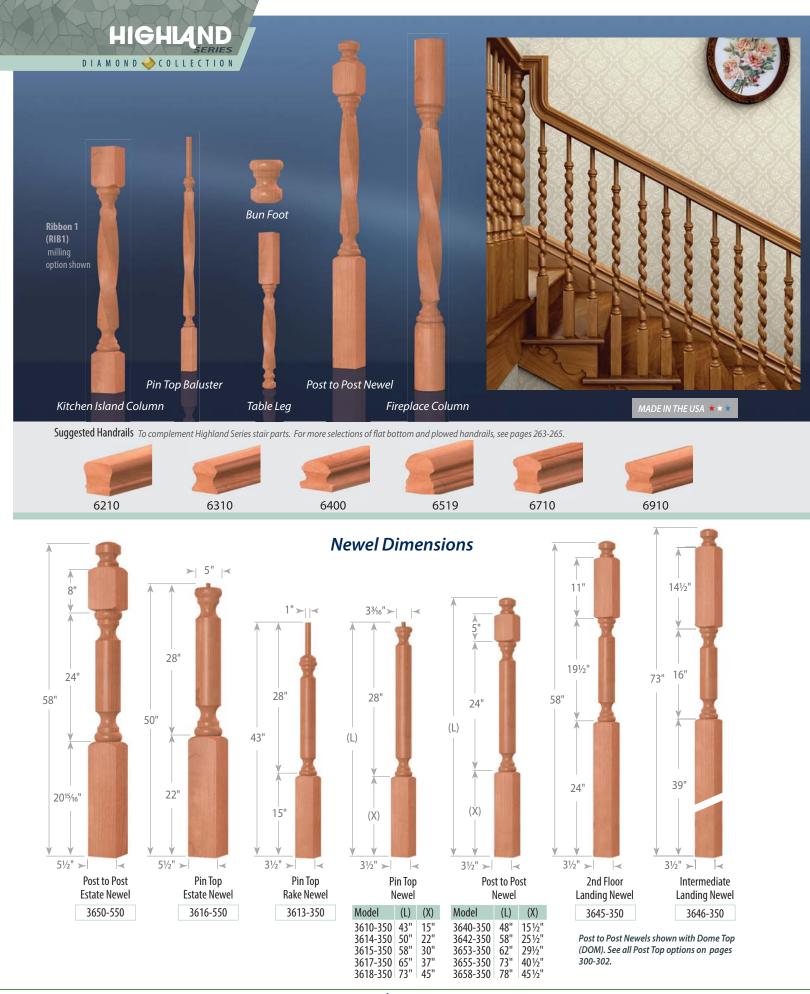




Baluster Dimensions




-175-42 42" 27 $\frac{13}{4}$ " \frac




2610-175 Pin Top Balusters (1¾" wide)

2605-175 Square Top Balusters (1³/₄" wide)

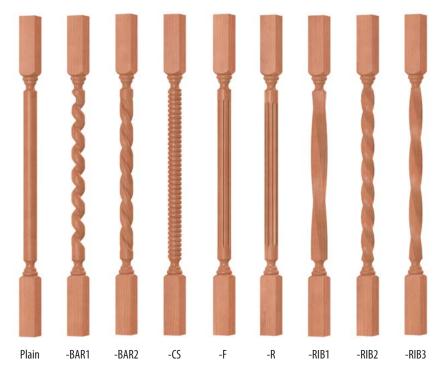



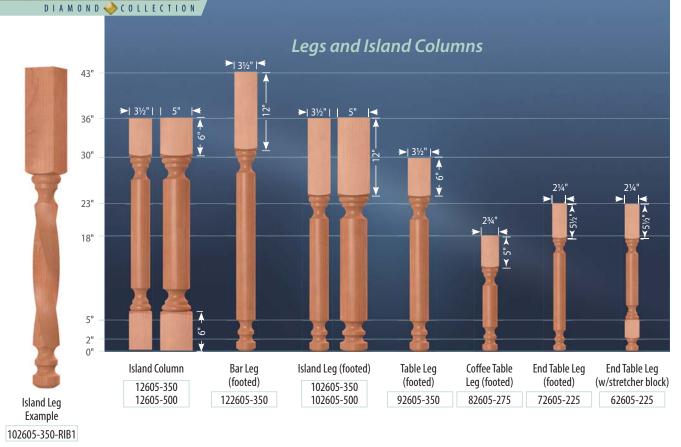




HIGHLAND

MILLING OPTIONS	CODE	Island Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Barley 1	BAR1		√				
Barley 2	BAR2		1		1		
Corkscrew	CS		1		1		
Fluted	F		1		1	1	1
Reeded	R		1		1	1	1
Ribbon 1	RIB1		1		1	1	
Ribbon 2	RIB2		1		1	1	
Ribbon 3	RIB3		1		1		
Ribbon 4	RIB4						

*Barley 2 (BAR2) milling option not available for Decorative Columns over 71/2" width

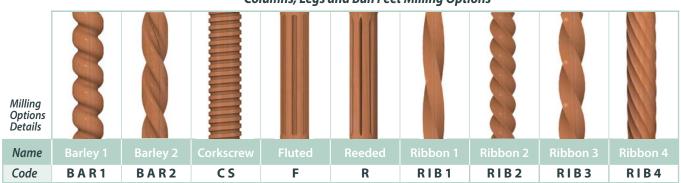


Columns, Legs and Bun Feet Milling Options



Interior Posts Fireplace

Fireplace Columns

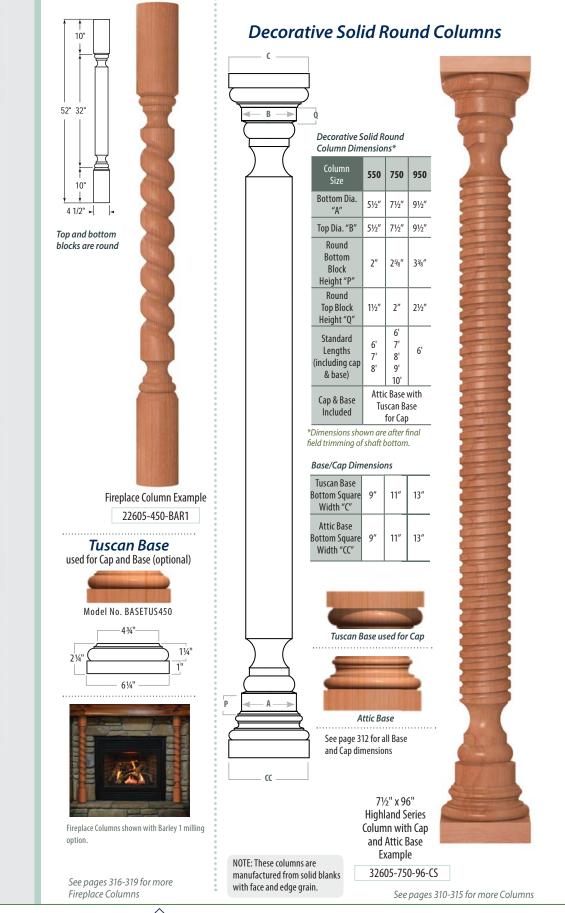

96" ↓ ↓ 40" ↓ ↓ 96" ↓ ↓ ↓ 44" ↓ ↓ ↓ ↓

Standard post size is 5½"wide and 96" high.



Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.

STAIR PARTS AND MORE

Modern Metal...

Oak Pointe now offers more choices than ever with our new Modern Metal Collection.

Products included in installation above:

- Handrail- 6039 & stainless steel fittings (see page 196)
- Stainless Steel Newels- Round series 1½" diameter with adjustable flange (see pages 222-224)
- Balusters- 1/2" round stainless steel (see page 196)

(see po

Y

Photo courtesy of Letendre Custom Woodworks, Inc., Hobe Sound, FL

Products included in installation above:


- Handrail- 6039 & stainless steel fittings (see page 196)
- Stainless Steel Newels-Round series 1½" diameter with adjustable flange (see pages 222-224)
- Infill- 1/2" round stainless steel, horizontal application with bar holders (see page 229)






BALUSTER PĄNELS

INTERIOR & EXTERIOR

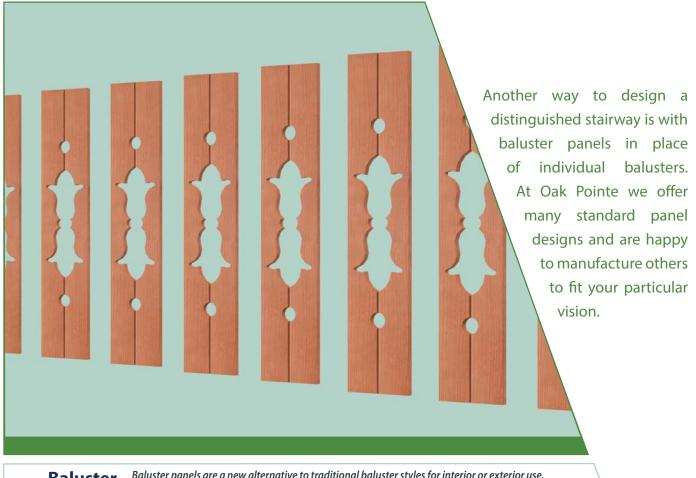

Baluster Panels

Baluster panels are a new alternative to traditional baluster styles for interior or exterior use. This series utilizes a visual uniqueness which emphasizes both positive and negative space on any staircase or landing.

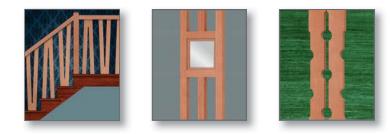

Baluster Panels




glue when required. Many wood species are satisfactory choices for exterior use if properly finished and sealed (all edges and faces) after cutting to finished size but before installation. Additional top coats should be applied when the most recent one starts to breakdown.

BALUSTER PAN

ADE IN THE USA ★

Suggested wood choices for exterior applications include: Good: Pine, Southern Yellow Pine, and KDAT (Kiln dried after treatment-southern yellow pine) Good: Pine, Southern Yellow Pine, and KDAT (Kiln dried after treatment-southern yellow pine) Good: Pine, Southern Yellow Pine, Southern Yellow Suggested wood choices for exterior applications include: Good: Pine, Southern Yellow Yellow Cedar Suggested Wood choices for exterior applications include: Suggested Wood choices for externations include: Sugges


Many others per your request.

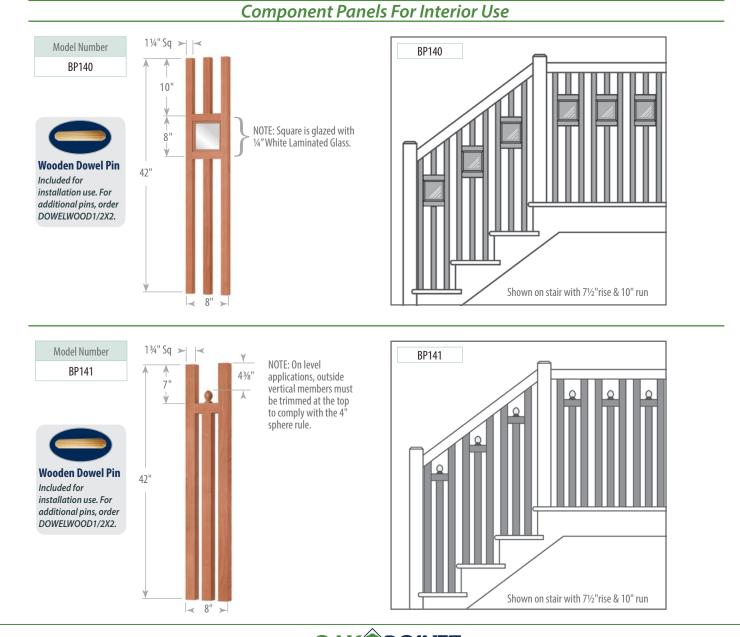

Parts and More



Shown on stair with 71/2"rise & 10" run

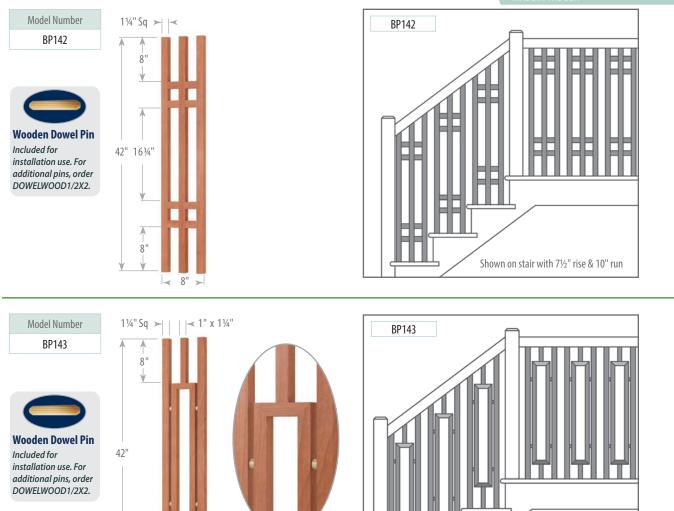

Machined Panels For Interior and Exterior Use


Detail - Shown in Cherry

with Hard Maple dowel

connectors

8'


< 8" >

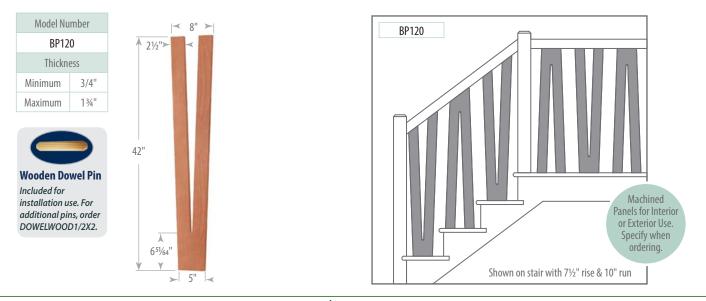




Baluster Panels


BALUSTER PANEL

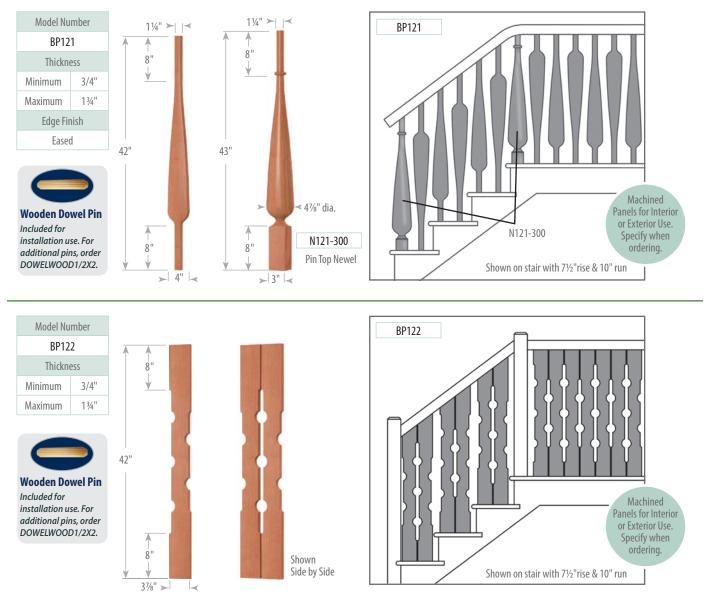

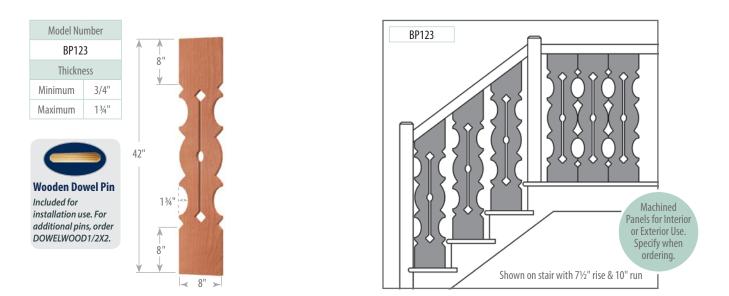





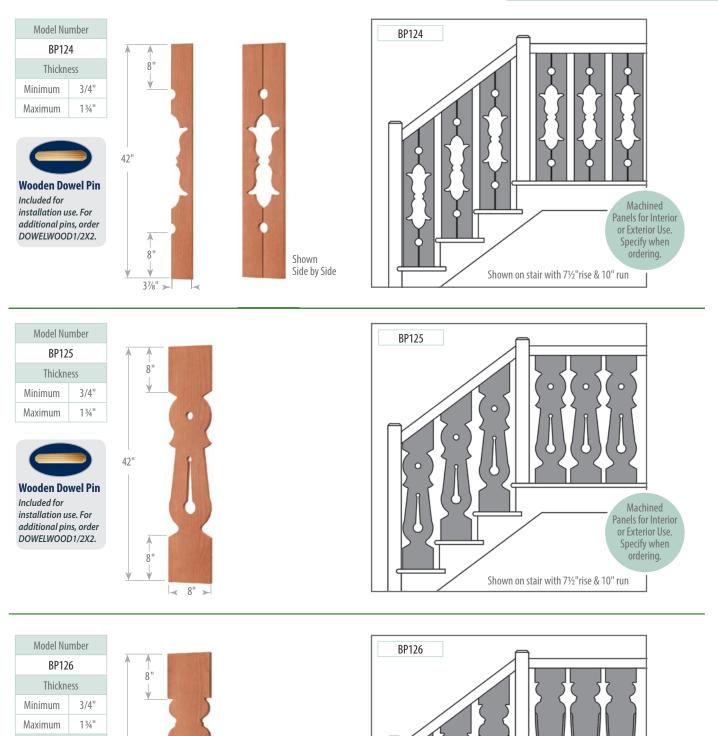



Edge Finish Chamfered

Wooden Dowel Pin

installation use. For

additional pins, order DOWELWOOD1/2X2.

Included for

42"

8"

< 8" ≻

Machined

Panels for Interior or Exterior Use.


Specify when

ordering.

Shown on stair with 7½" rise & 10" run

STAIR PARTS AND MORE

Handrails...

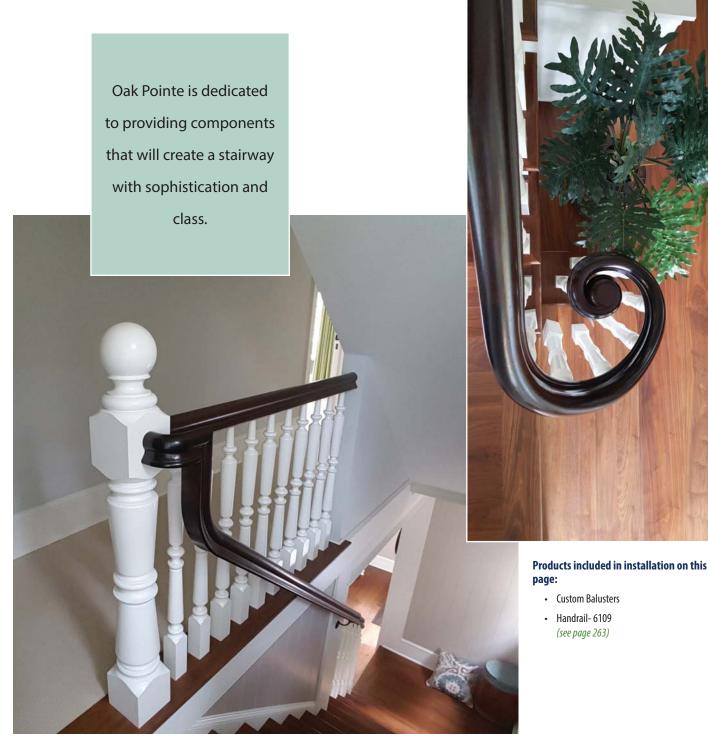

Photos by David W. McKee, RA





european collection

BARCELONA • VIENNA • LISBON

Our European Collection, designed and manufactured by Oak Pointe, features a series of turned products that reflect the master craftsmen of centuries past. This introduction demonstrates our ongoing commitment to bring you an ever expanding offering of different and unique Stair Parts and More. All components in this collection are for interior use only.

European Collection

Custom components are an integral part of our business. Call for pricing on your designs for interior and exterior use.












Balusters & Newels

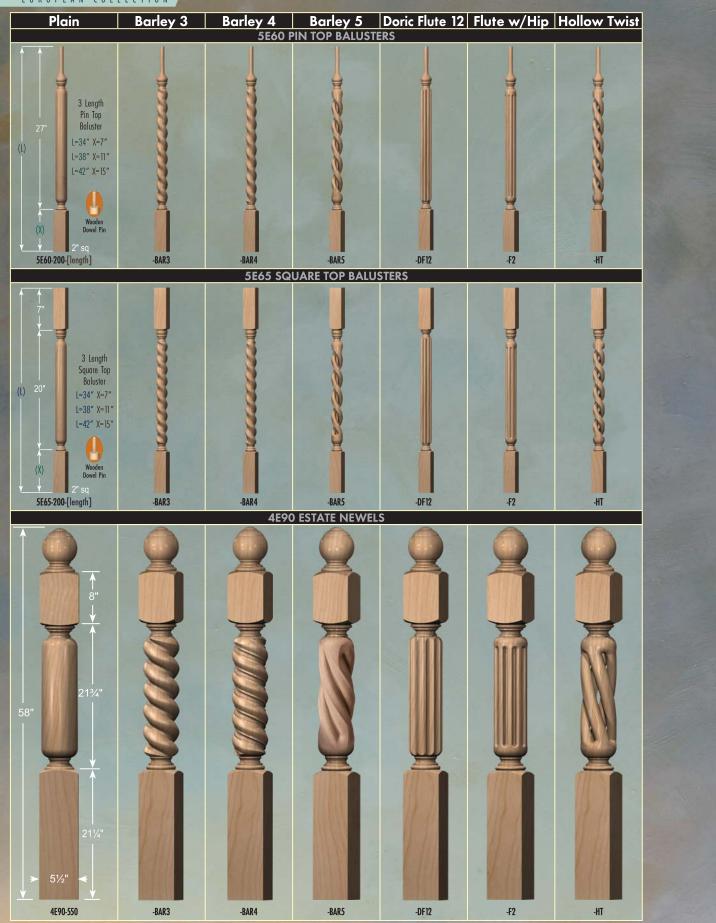







6310 (Pin Top only)

5 Length Baluster Dimensions


6400

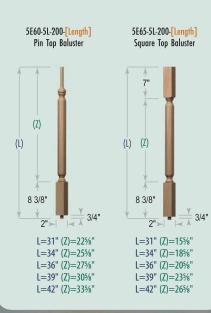

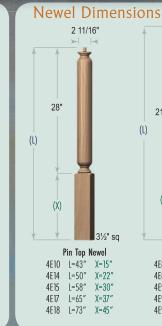

6519

(L)

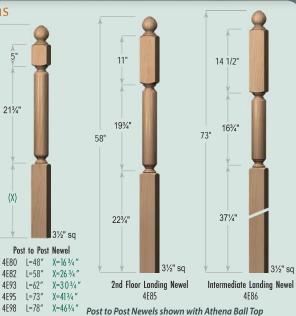

6710 (Pin Top only)

(ATH). See all Post Top options on pages 300-302.

6910




4E86

31⁄2" sq

Kitchen Island & Fireplace Columns


BARCELONA

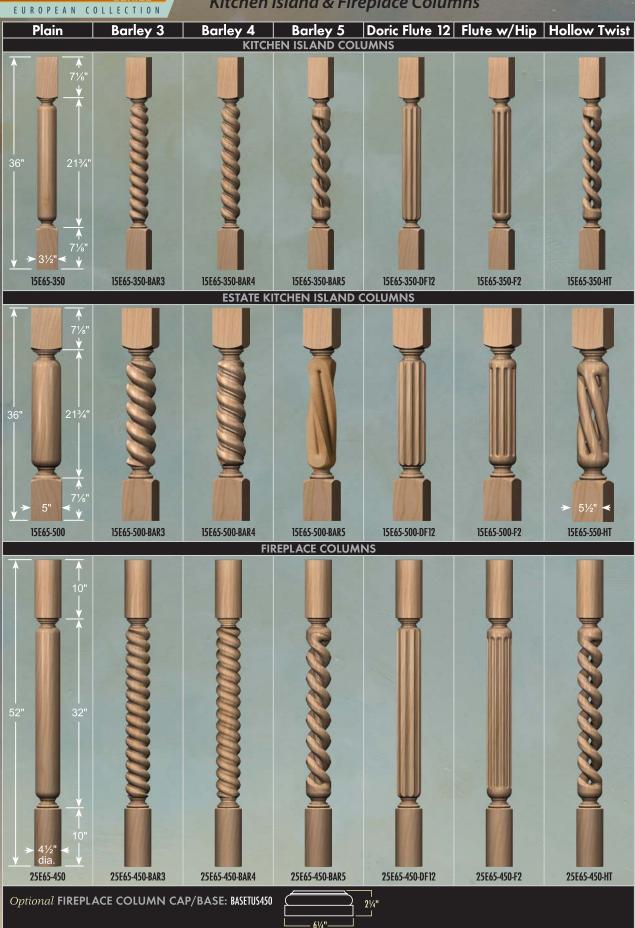



Decorative Full-Size Columns


BARCELONA

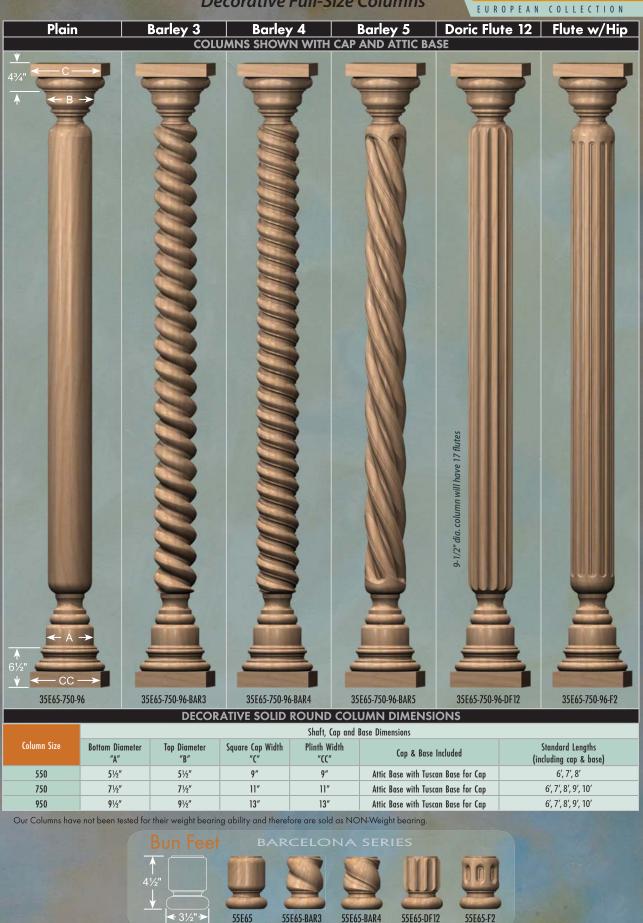

OAKPOINTE




Balusters & Newels

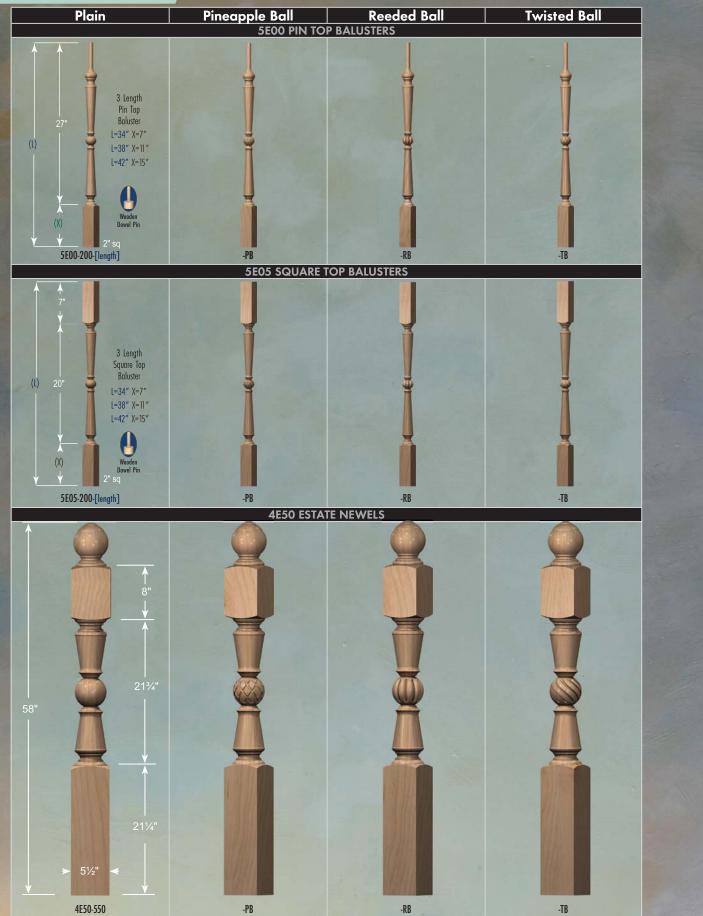






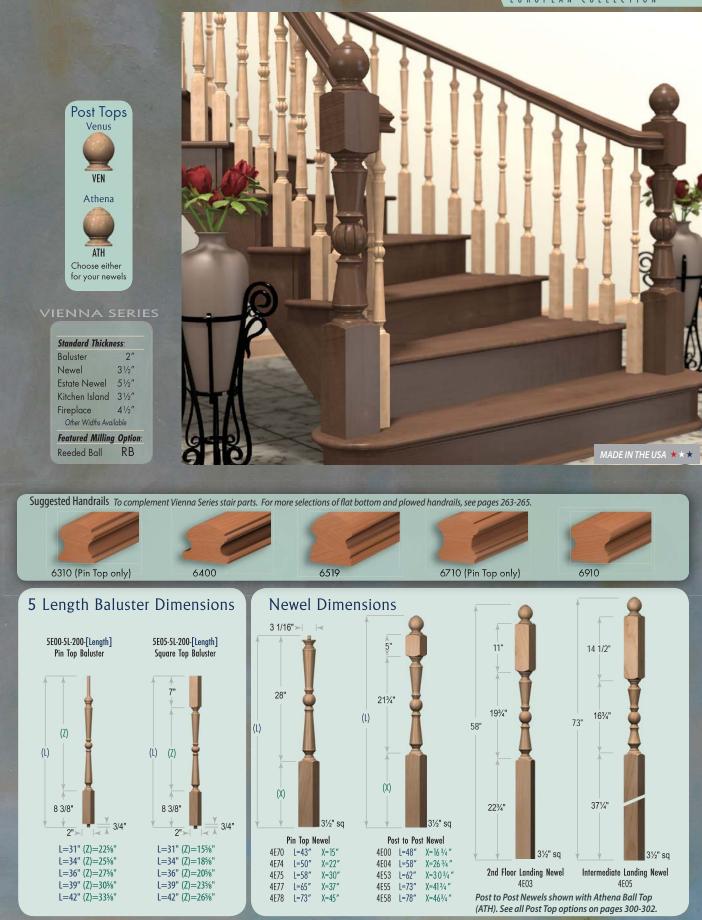



Kitchen Island & Fireplace Columns

VIENNA

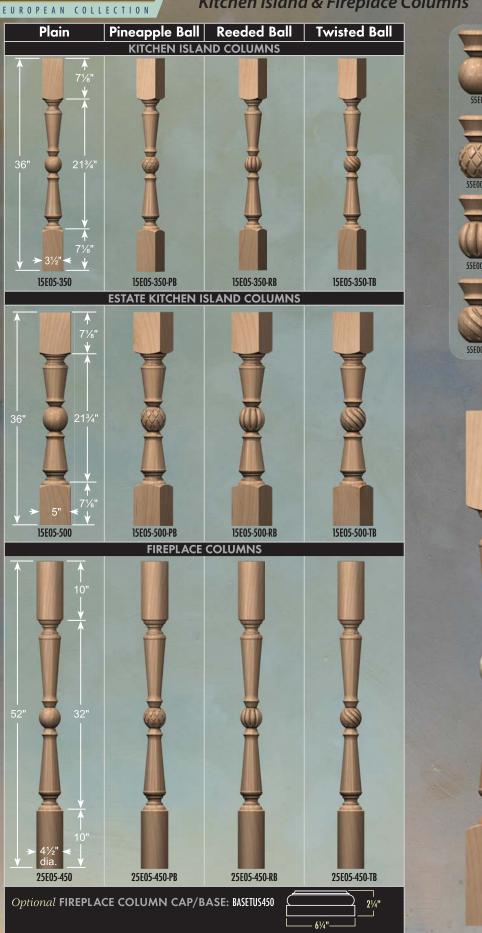

Bun Feet 41/2 55E05 55F00_TR

> Larger view of the Plain Ball Island Column shown painted with customer applied marble faux finish.

Decorative Full-Size Columns

VIENNA



91⁄2″

9½″

950



13″

Our Columns have not been tested for their weight bearing ability and therefore are sold as NON-Weight bearing.


Attic Base with Tuscan Base for Cap

13″

6', 7', 8', 9', 10'




Balusters & Newels

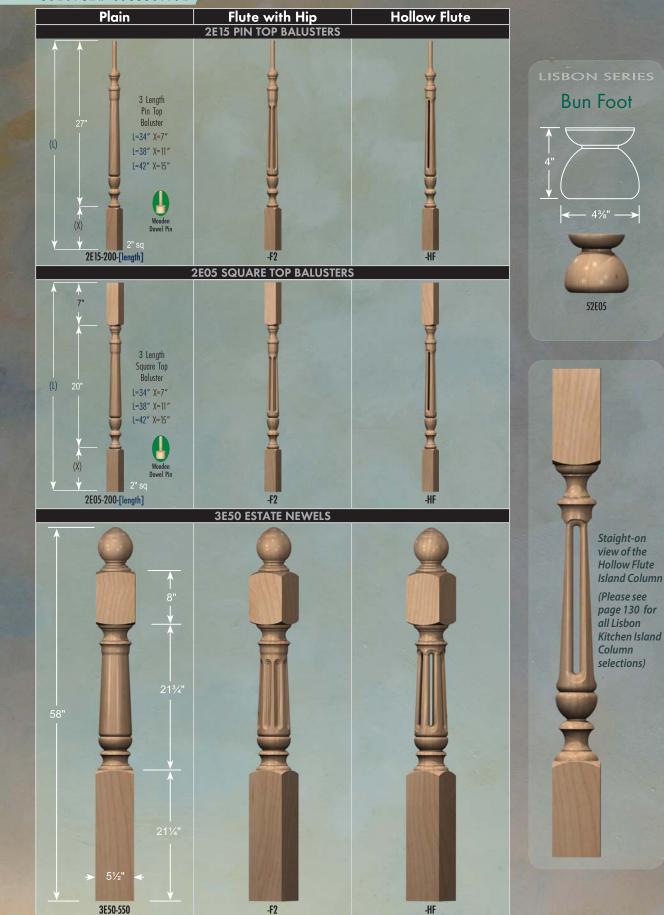





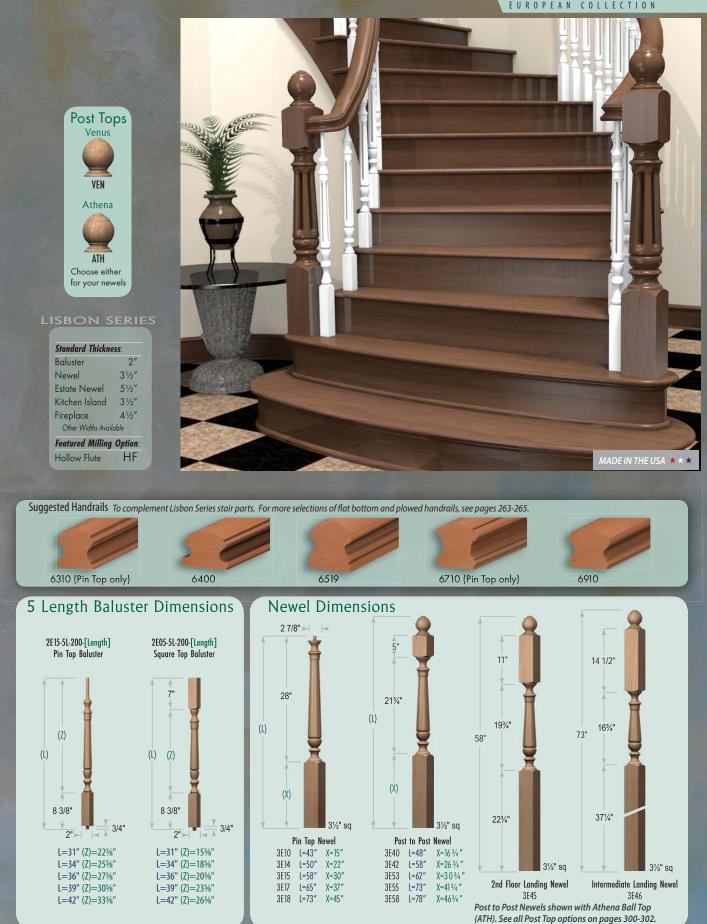



Kitchen Island, Fireplace & Decorative Columns

LISBON







STAIR PARTS • LEGS • COLUMNS



MADE IN THE USA

Classic Collection


Custom components are an integral part of our business. Call for pricing on your designs for interior and exterior use.











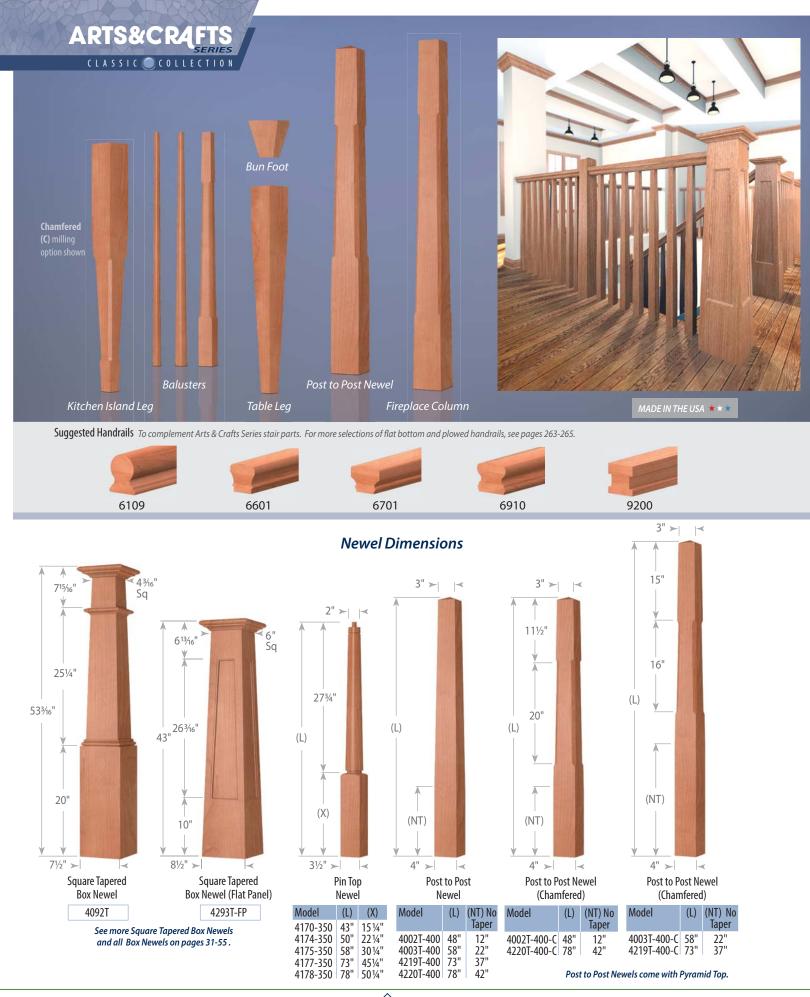




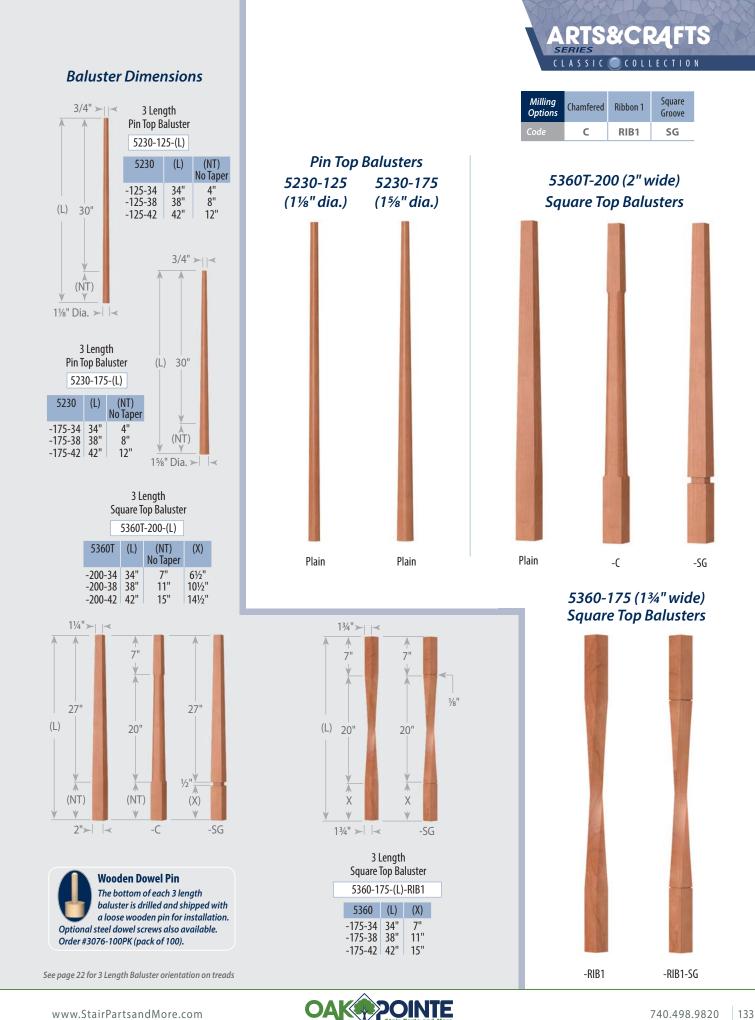


ARTS&CRAFTS

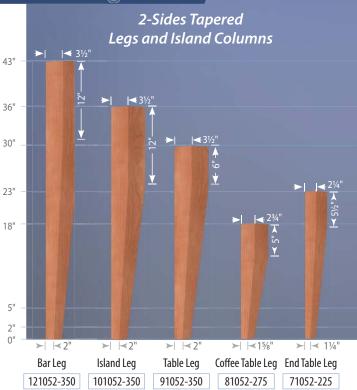

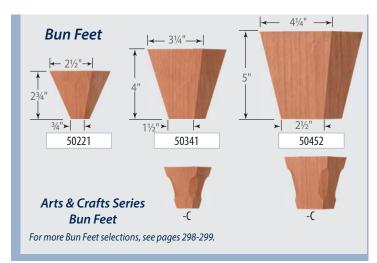




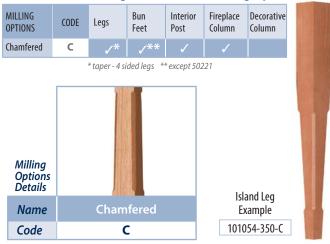



Fireplace Columns

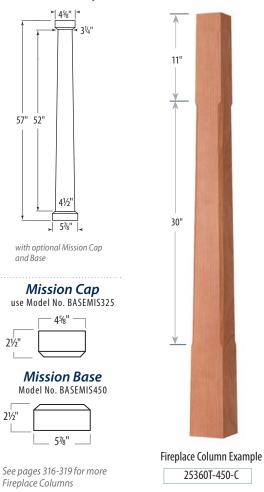



Interior Posts



not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.

NOTE: These columns are manufactured from solid blanks with face and edge grain.

Decorative Square Tapered Hollow Columns

Square Tapered Hollow Column Dimensions*									
Column Size	1000	1025	1200	1400	1600				
Bottom Width "A"	10"	10¼"	12"	14"	16"				
Top Width "B"	5½"	7½"	10"	12"	9"				
Standard Lengths (including cap & base)	66"	7'	6', 10'	9'	58", 6', 8'				
Cap & Base Included		Missi	on Cap	/Base					


*Dimensions shown are after final field trimming of shaft bottom using Mission Cap/Base.

Mission Base/Cap Dimensions

	•							
Column Size	1000	1025	1200	1400	1600			
Mission Base bottom square width "C"	6%"	87%"	11¾"	13%"	10¾"			
Mission Base bottom square width "CC"	11¾"	115%"	13%"	15¾"	173⁄8"			
Mission Base used fo	or Cap		Mis	sion Ba	ise			


Tuscon Base/Cap Dimensions

Column Size	1000	1025	1200	1400	1600
Tuscon Base bottom square width "C"	9"	11"	13½"	151⁄2"	12½"
Tuscon Base bottom square width "CC"	13½"	13¾"	15½"	17½"	19½"
	-				



Examples of Mission Caps (with optional Neck Molds mitered and applied in field)



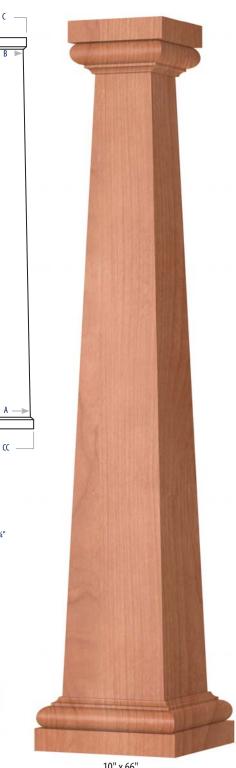


IS&CRAFTS

10" x 66" Arts & Crafts Series Column with optional Tuscan Cap and Base 35360T-1000x550-66

See pages 310-315 for more Columns






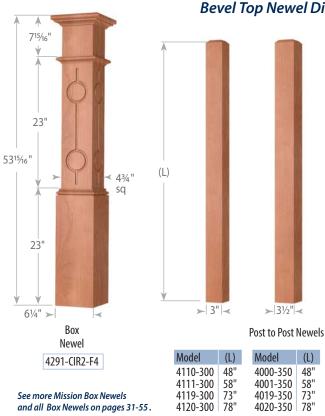

Bevel Top Newel Dimensions

Baluster Dimensions

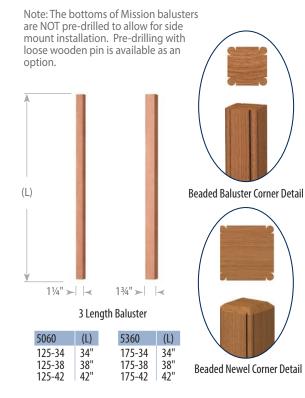

136 740.498.9820



(L)

≻| 4"|∢

4002-400 48"

4003-400 58"

4219-400 73"

4220-400 78"

Model

(L)

58"


73"

78"

MISSION SERIES CLASSIC COLLECTION

Code BC C CF CFG CG CIR1 -F4 CIR2 -F4 F FG G M4L- VG4 M4R- VG4 Chamfered cross section	M6C- M9- VG4 VG4		
Chamfered			
5060-C 5360-C Chamfered detail		31:	*
Plain -BC -C -CF -CFG -CG -F -FG -G -M4L-VC	54 -M4R-VG4 -M6	-M4R-V(-M4R-VG4 -M



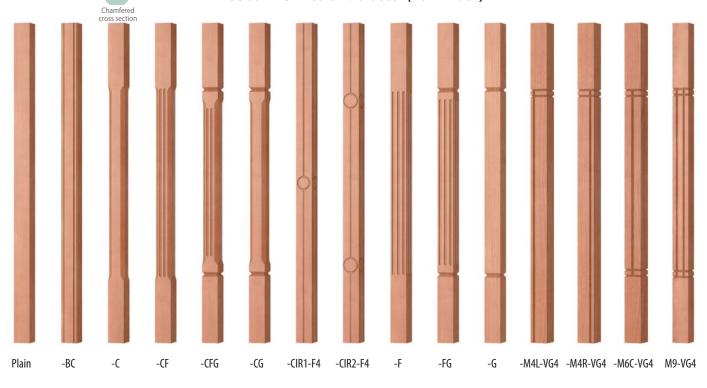



MISSION SERIES


	CLASSI	C 🔘 C O L L	ĒĊŤ	ION			Balusters Newels					
		lewels shown	<u>]</u>	Milling Option	Code	Description	5060	5360	4110 4000 4002	4111 4001 4003	4119 4019 4219	4120 4020 4220
Top Block	Top Block	Block		Beaded Corner	ВС		Full	Full	Full	Full	Full	Full
			۾ ا			Top Block	7"	7"	11-1/2"	15"	15"	11-1/2"
Chamfar	Observation	Chamfer ⊒	oove -	Chamfered	с	Chamfer	20"	20"	20"	16"	16"	20"
Chamfer	Chamfer	Flute	Tip to			Bottom Block	7" 11" 15"	7" 11" 15"	16-1/2"	27"	42"	46-1/2"
			Tip _			Top Block	7"	7"	11-1/2"	15"	15"	11-1/2"
				Chamfered	CF	Chamfer	20"	20"	20"	16"	16"	20"
Bottom	Bottom			& Fluted	. .	Flute	18" (1)	18" (2)	17" (2)	13" (2)	13" (2)	17" (2)
Block	Block	Bottom Block				Bottom Block	7" 11" 15"	7" 11" 15"	16-1/2"	27"	42"	46-1/2"
						Top Block	7"	7"	9-1/2"	-		9-1/2"
C	CF	CO	3	Chamfered & Grooved	CG	Chamfer	17"	17"	20"			20"
			٦	& Grooved		Groove- tip to tip	20"	20"	24"			24"
Top Block	Top Block	Top Block				Bottom Block	7" 11" 15"	7" 11" 15"	14-1/2"			44-1/2"
		DIOCK				Top Block	7"	7"	9-1/2"	-		9-1/2"
∟Duul				Chamfered,		Chamfer	17"	17"	20"			
Chamfer	ut fu	U ingth	cente	Fluted & Grooved	CFG	Flute	15"(1)	15" (2)	17" (2)			17" (2)
Flute	Groove - tip to tip	Milling Length	ir to cei			Groove- tip to tip	20" 7" 11" 15"	20" 7" 11" 15"	24"			
	o tip)) nter			Bottom Block			14-1/2"			
						Top Block		10"	11-1/2"	15"	15"	11-1/2"
	Bottom Bottom		Circle 1	CIR1	Milling length	17"		20"	16"	16"	20"	
Bottom Block	Block	Block				Bottom Block			16-1/2"	27"	42"	46-1/2"
CFG	CIR1	CIR	22			Top Block		14"	11-1/2"	15"	15"	11-1/2"
Top Block	Top Block	Top Block		Circle 2	CIR2	Circle Center-Center		-0	10-1/8"	8-7/16"	8-7/16"	10-1/8"
						Milling length		10" 14" 18"	20"	16"	16"	20"
		Groove - tip to	- Groove			Bottom Block	5360-CIR1	5360-CIR2	16-1/2"	27"	42"	46-1/2"
Flute	Flute	e - tip to	e - tip to			Top Block	7"	7"	11-1/2"	15"	15"	11-1/2"
		tip	center to center CCR2	Fluted	F	Flute	20" (2)	20" (3)	20" (3)	16" (3)	16" (3)	20" (3)
						Bottom Block	7" 11" 15"	7" 11" 15"	16-1/2"	27"	4019 4219 40 15" 1 15" 1 42" 4 15" 1 16" 1 1	46-1/2"
Pottern						Top Block	7"	7"	9-1/2"	13"	FullFullFull15"15"11-116"16"2027"42"46-115"15"11-116"16"203" (2)13" (2)17"27"42"46-113"13"9-1/16"16"2020"20"2425"40"44-113"13"9-1/16"16"2020"20"2425"40"44-113"13"9-1/16"16"203" (2)13" (2)17"20"20"2425"40"44-115"15"11-116"16"2027"42"46-115"15"11-116"16"2027"42"46-115"15"11-16" (3)16" (3)20"27"42"46-113"13"9-1/20"20"2425"40"44-113"13"9-1/20"20"2425"40"44-113"13"9-1/20"20"2425"40"44-113"13"9-1/20"20"2425"40"44-113"13"9-1/20"20"2425"40"	9-1/2"
Bottom Block	Bottom Block	Bottom Block		Fluted & Grooved	FG	Flute	17" (2)	17" (3)	20" (3)	16" (3)		20" (3)
				Grooved		Groove- tip to tip	20"	20"	24"	20"		24"
F	FG	G	_] ì			Bottom Block	7" 11" 15"	7" 11" 15"	14-1/2"			44-1/2"
			ך	Concert I	C	Top Block	7"	7"	9-1/2"			9-1/2"
Top Block	Top Block	Top Block		Grooved	G	Groove- tip to tip	20"	20"	24"			
				Mission 4		Bottom Block	7" 11" 15"	7" 11" 15"	14-1/2"	25	40	44-1/2"
				LH & RH V-Grooved	M4L-VG4 & M4R-VG4	Top Block	7"	7"	9-1/2"	13"	13"	9-1/2"
	V-Groove	V-Groove		Mission 6		Top Block	7"	7"	9-1/2"	13"	13"	9-1/2"
				Centered	M6C-VG4	V-Groove	20"	20"	24"	20"	20"	24"
				V-Grooved		Bottom Block	7" 11" 15"	7" 11" 15"	14-1/2"	25"	40"	44-1/2"
			۴ ۱	Mission 9		Top Block	NA	7"	9-1/2"	13"	13"	9-1/2"
	Bottom	Bottom		Centered V-Grooved	M9-VG4	V-Groove	NA	20"	24"	20"	20"	24"
	Block	Block		v-Grooved		Bottom Block	NA	7" 11" 15"	14-1/2"	25"	15" 1 16" 1 15" 1 15" 1 13"(2) 1 13"(2) 1 13"(2) 1 13"(2) 1 16" 1 20" 1 13"(2) 1 16" 1 13"(2) 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 16" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 13" 1 <tr< td=""><td>44-1/2"</td></tr<>	44-1/2"
M4L-V	G4 M6C-VC	64 M9-V	 G4									





Island Columns	Bar Leg	Island Legs	Table Leg	Coffee Table Leg	End Table Leg	Fireplace Column	Interior Post
15360-350 15360-500	125360- 350	105360-350 105360-500		85360-275	65360-225	25360	45360
Full	Full	Full	Full	Full	Full	Full	Full
8"	14"	14"	8"	6-1/2"	7"	12"	14"
20"	21"	14"	14"	7"	11-1/2"	28"	36"
8"	8"	8"	8"	4-1/2"	4-1/2"	12"	46"
8"	14"	14"	8"	6-1/2"	7"	12"	14"
20"	21"	14"	14"	7"	11-1/2"	28"	36"
17"*	18" (2)	11"*	11" (2)	5" (2)	9-1/2" (2)	25" (3)	32" (3)
8"	8"	8"	8"	4-1/2"	4-1/2"	12"	46"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
20"	21"	14"	14"	7"	11-1/2"	28"	36"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
20"	21"	14"	14"	7"	11-1/2"	28"	36"
17"*	18" (2)	11"*	11" (2)	5" (2)	9-1/2" (2)	25" (3)	32" (3)
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
12-3/16"	13-1/8"	10-1/8"	10-1/8"	5-9/16"	7-9/16"	15-5/16"	21"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
8"	14"	14"	8"	6-1/2"	7"	12"	14"
20"^	21" (3)	14"^	14" (3)	7" (3)	11-1/2" (3)	28" (4)	36" (4)
8"	8"	8"	8"	4-1/2"	4-1/2"	12"	46"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
20"^	21" (3)	14"^	14" (3)	7" (3)	11-1/2" (3)	28" (4)	36" (4)
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"
6"	12"	12"	6"	5"	5-1/2"	10"	12"
24"	25"	18"	18"	10"	14-1/2"	32"	40"
6"	6"	6"	6"	3"	3"	10"	44"

Mission Milling Options

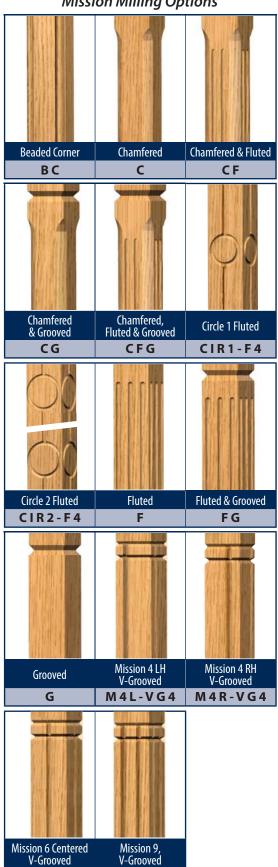


*(3¹/₂" = 2 Flutes) (5"= 3 Flutes) ^(3¹/₂" = 3 Flutes) (5"= 4 Flutes)

M 6 C - V G 4

M9-VG4

MISSION C L A S S I C 🔘 C O L L E C T I O N

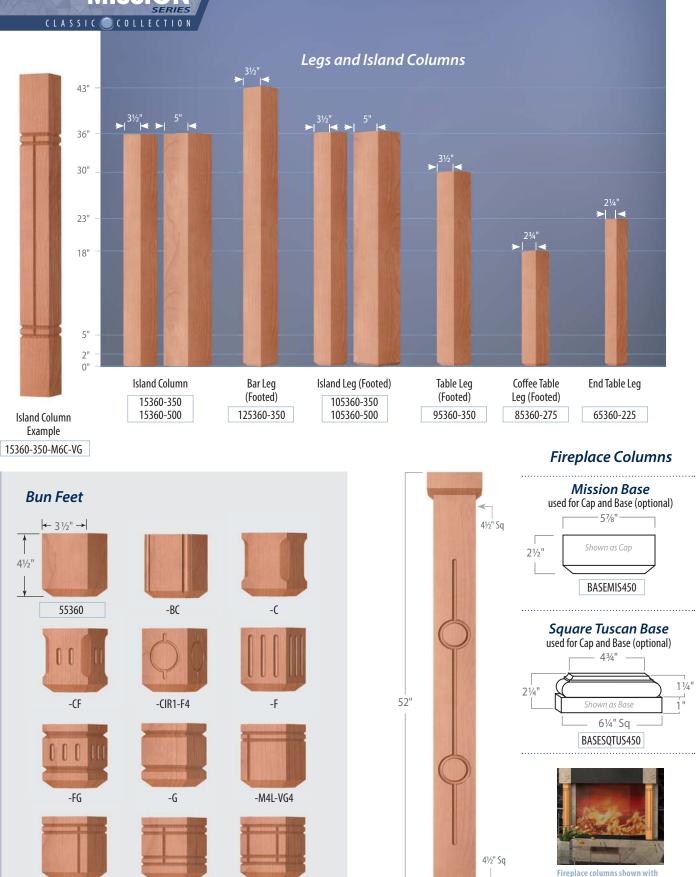

25360-450-CIR2-F4

Shown with Optional See pages 316-319 for more Mission Cap/Base Fireplace Columns




M9-VG4 milling option.

-M4R-VG4

-M6C-VG4


Mission Series Bun Feet For more Bun Feet selections, see pages 298-299.

-M9-VG4

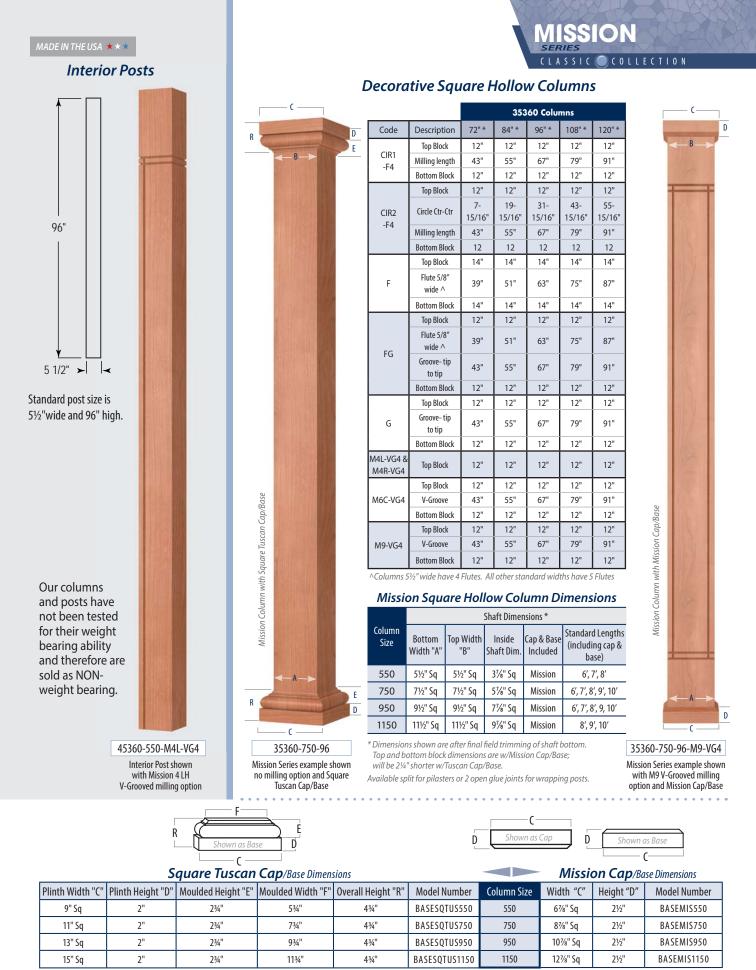


See pages 310-315 for more Columns



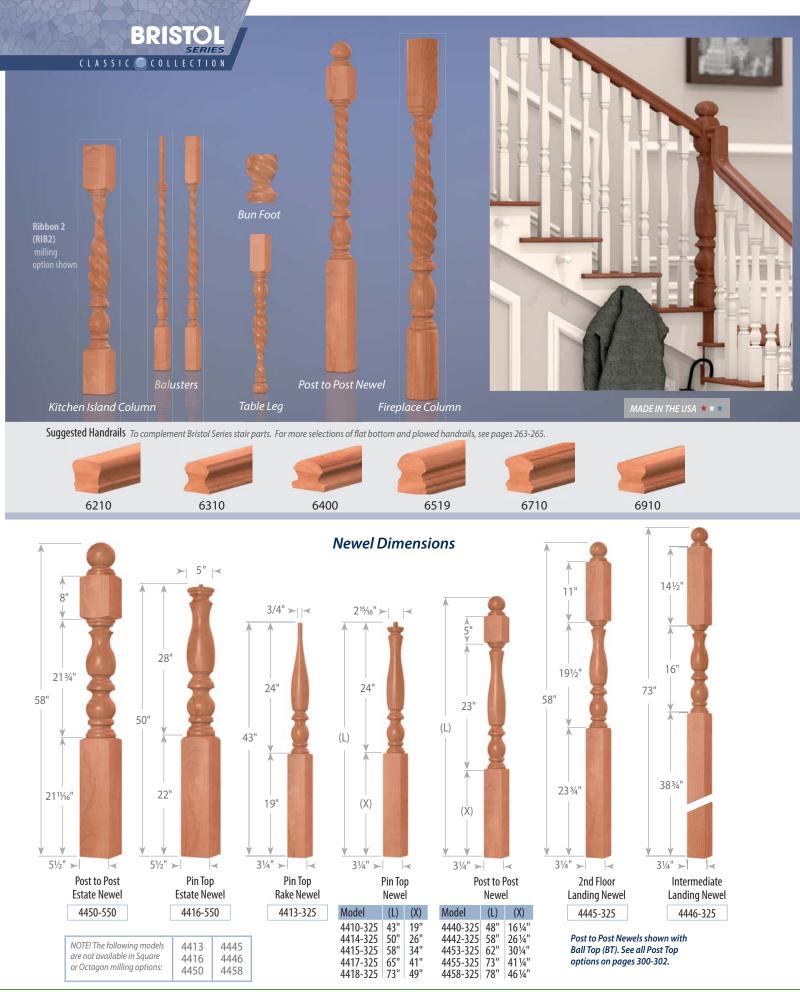




Baluster Dimensions

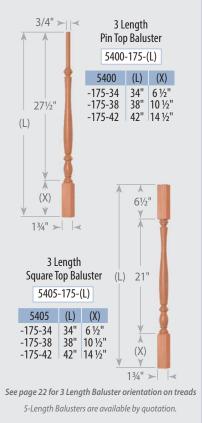


Wooden Dowel Pin The bottom of each 3 length baluster is drilled and shipped with a loose wooden pin for installation. Optional steel dowel screws also available. Order #3076-100PK (pack of 100).

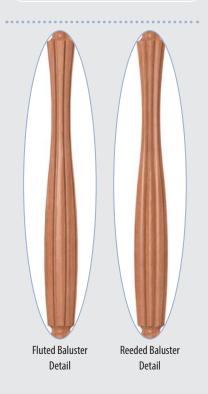




STOL

5405-175 Square Top Balusters (1³/₄" wide)

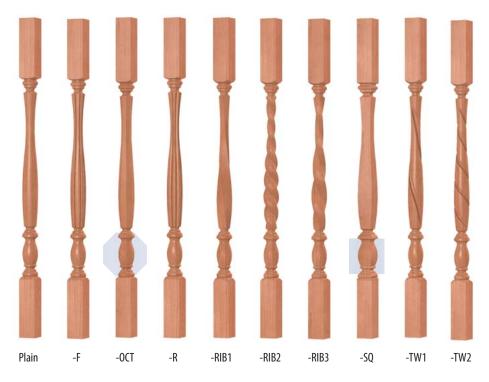



BRISTOL SERIES

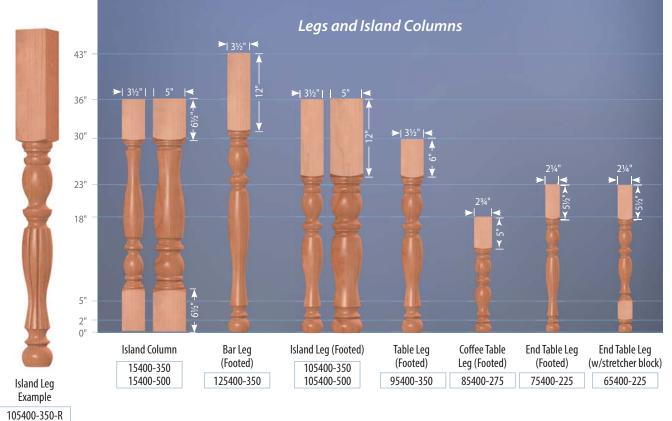


В	un Feet		≺ 31⁄8" →	MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
111				Fluted	F	 ✓ 	1	1	1	1	1
				Octagon	ост	 Image: A second s					
			41/2"	Reeded	R	✓	1	1	1	1	 ✓
Contraction of the second				Ribbon 1	RIB1	 Image: A start of the start of	1		1	1	
-F	-R	-RIB2	Contraction of the local division of the loc	Ribbon 2	RIB2	<i>√</i>	√	1	1	1	
Section of the sectio	6/1			Ribbon 3	RIB3	1	1	1	1	1	
			55400	Ribbon 4	RIB4						1
A second			Bristol Series Bun Feet	Square	SQ	1					
A LOUGH		ALC: NOTE: N	For more Bun Feet selections,	Twist	TW			1			
-RIB3	-TW	-TW1	see pages 298-299.	Twist 1	TW1	1	1	1	1	1	 ✓
				Twist 2	TW2	\checkmark	 ✓ 		1	1	\checkmark









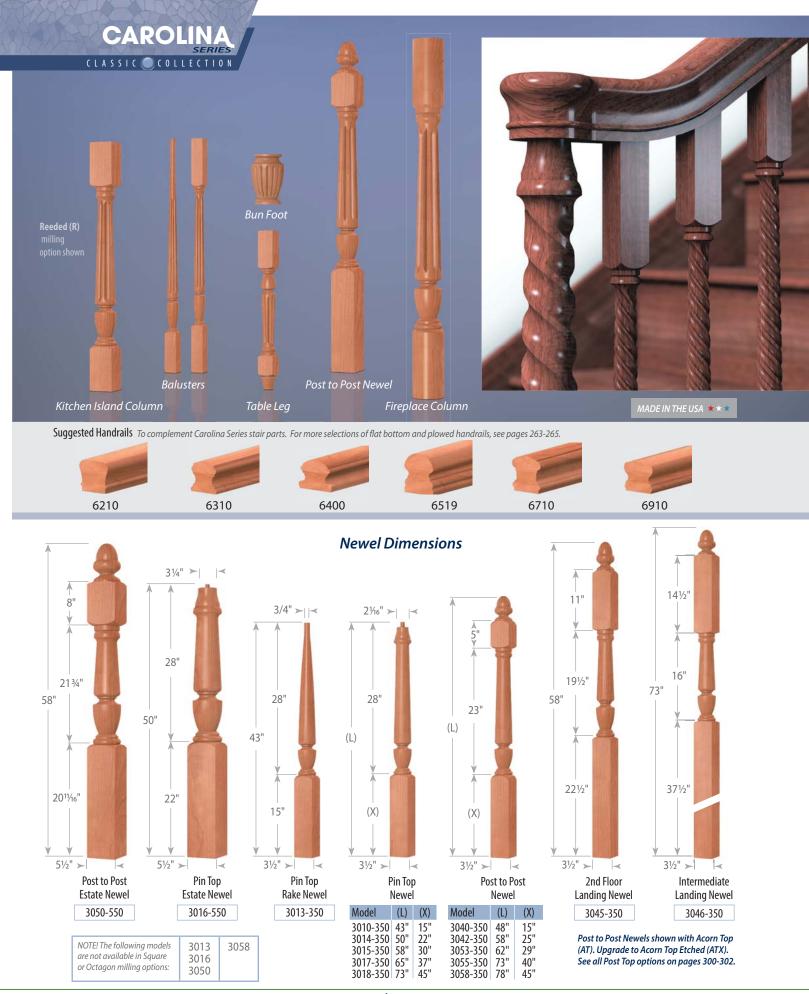



Baluster Dimensions

Milling

Options

Barley 2

BAR2

Fluted

F



CT 2015-175 Pin Top Balusters (1¾" wide)

Rope Twist Rope Twist

(RH)

RTRH

(LH)

RTLH

Reeded

R

Octagon

ост

CAROLINA

Square

SQ

COLLECTION

Twist

TW

Twist/

Urn Fluted

TW/UF

Urn Fluted

UF


CLASSIC

Rope

Twist 1

RT1

2005-175 Square Top Balusters (1¾" wide)

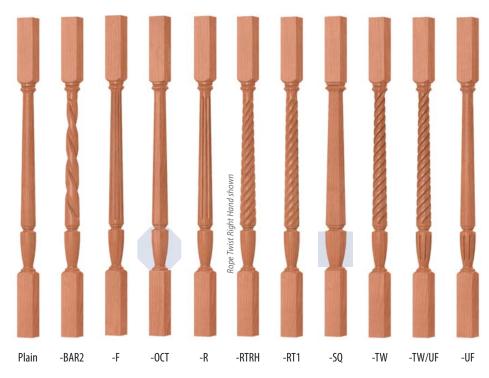




See page 22 for 5 Length Baluster orientation on treads

-175-42 42" 75%" 26'

1¾" ≻| |∢▲

CAROLINA SERIES

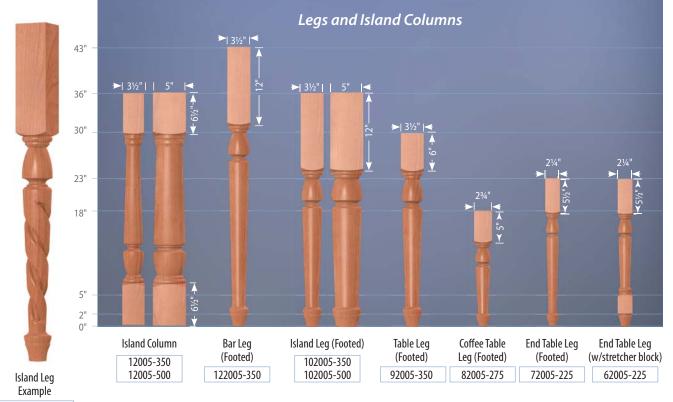


102005-350-BAR2


Bun Feet	← 3¼" →	MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
THE REAL PROPERTY.		Barley 2	BAR2		1			1	1
		Fluted	F	1	1	1	1	1	 ✓
	5"	Fluted Sunburst	F1			1			
		Octagon	ост	1					
-F -F1		Reeded	R	1	1	1	1	1	1
		Dama Turiat	RTLH	1	√		1	1	 ✓
	52005	Rope Twist	RTRH	1	<i>✓</i>		1	1	1
	Carolina Series Bun Feet	Rope Twist 1	RT1	1	<i>✓</i>		1	1	1
	For more Bun Feet selections,	Square	SQ	1					
-R -TW	see pages 298-299.	Twist	TW	1	1	1	1	1	 ✓
-n -1W		Urn Fluted	UF	1	1		1	1	\checkmark

Columns, Legs and Bun Feet Milling Options





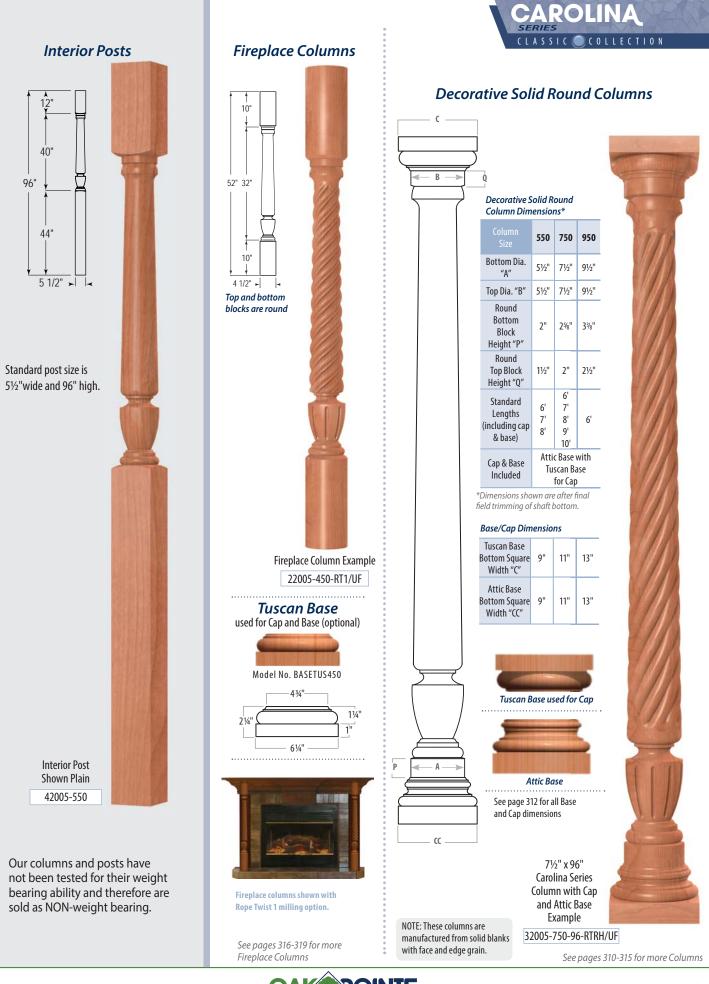

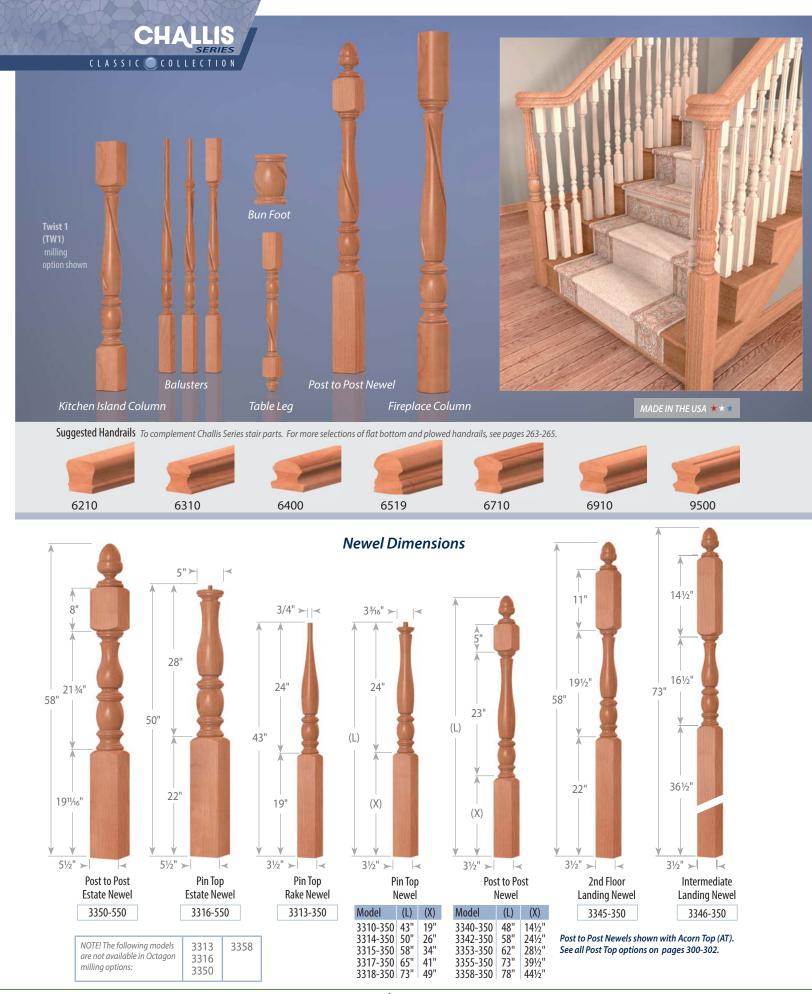




CHALLIS SERIES CLASSIC COLLECTION




Baluster Dimensions


See page 22 for 5 Length Baluster orientation on treads

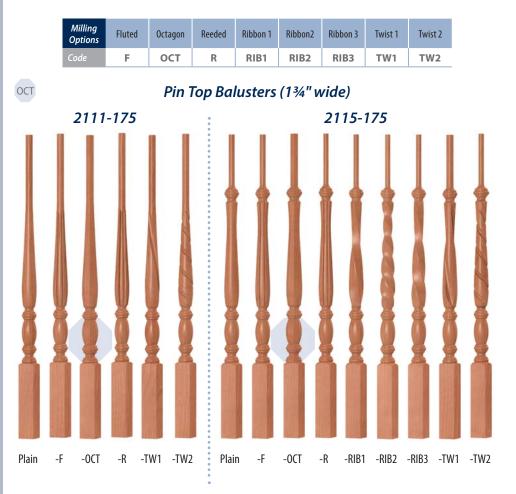

2105-175 Square Top Balusters (1³/₄" wide)

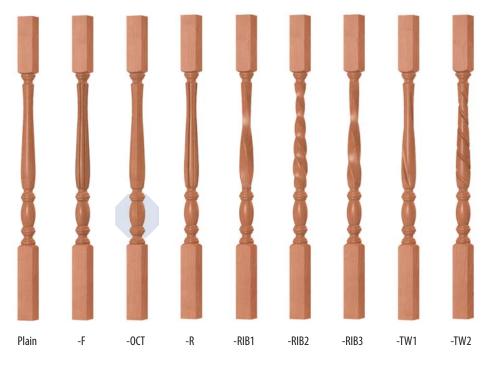



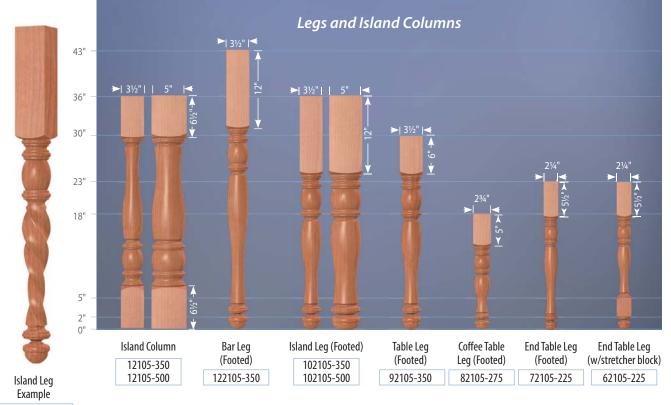



102105-350-RIB2


Bun Feet		← 31/4" →	MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
			Fluted	F	1	1			1	 ✓
	A 10 11		Fluted 1	F1			1			
			Octagon	ОСТ	1					
		5"	Reeded	R	1	1	1	1	1	1
	and the second second		Ribbon 1	RIB1	1	1		1	1	
-F -F1	-R	No. of Concession, Name	Ribbon 2	RIB2	1	1		1	1	
	-		Ribbon 3	RIB3	1	1		1	1	
		52105	Ribbon 4	RIB4						 ✓
		Challis Series Bun Feet	Rope Twist	RT			1			
		For more Bun Feet selections,	Twist	TW			1			
-RT -TW	-TW1	see pages 298-299.	Twist 1	TW1	1	1	1	1	1	 ✓
			Twist 2	TW2	1	1		1	1	1





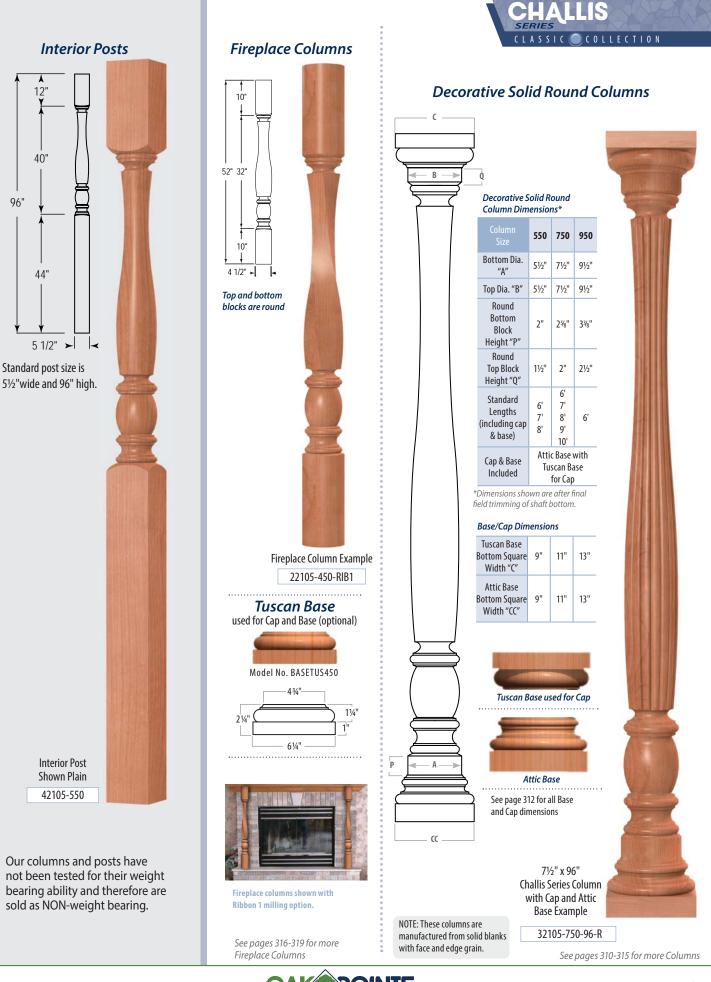


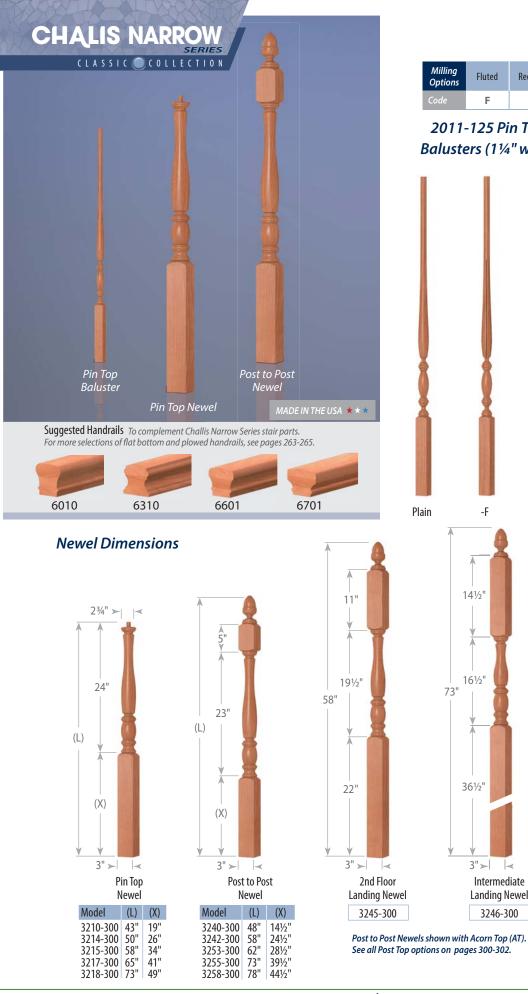

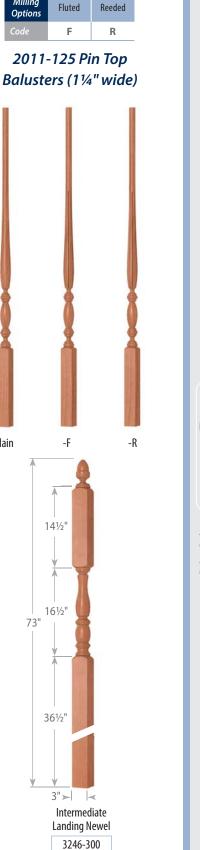

Dimensions 5/8" ≻||≪ 25%16" (L) (X) 11/4" > | | < 3 Length

Baluster




Optional steel dowel screws also available. Order #3076-100PK (pack of 100).


See page 22 for 3 Length Baluster orientation on treads

5 Length Baluster available by quotation



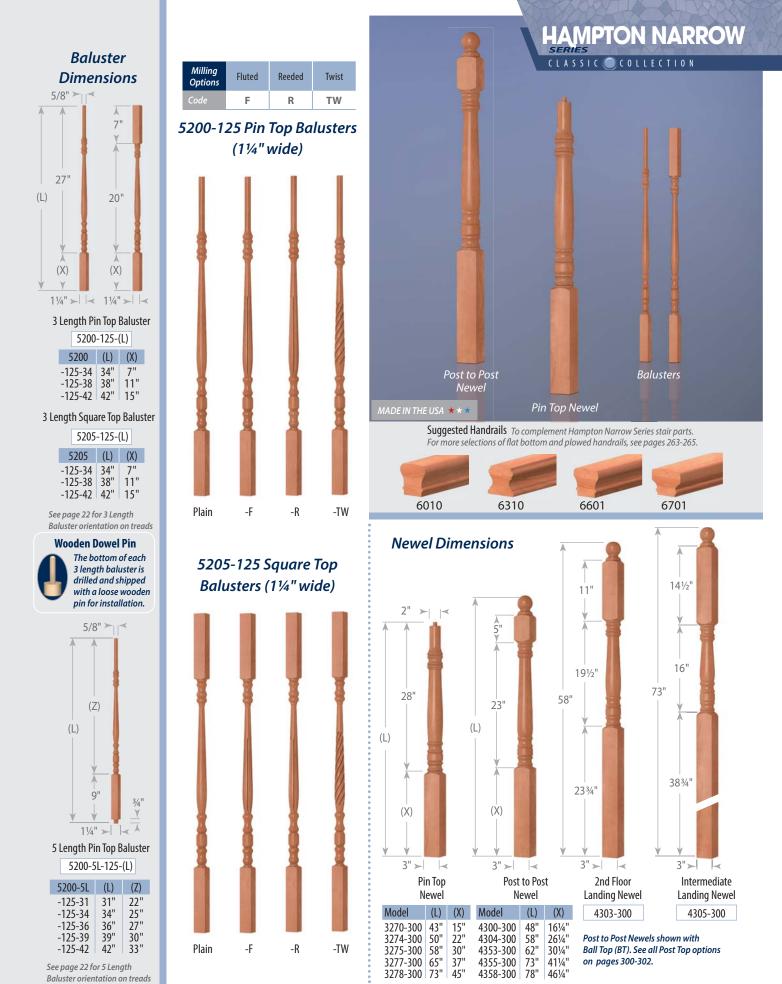


OAKPOINTE

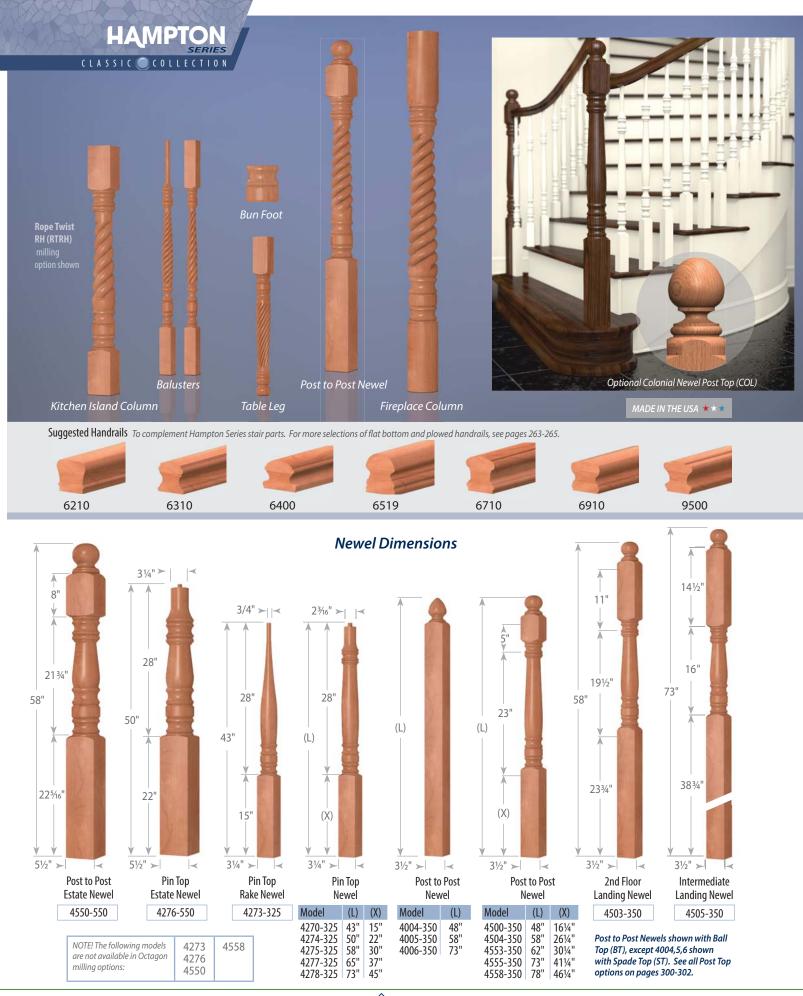

Baluster Dimensions




See page 22 for 3 Length Baluster orientation on treads

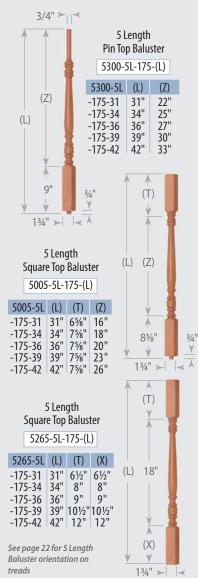


HAMPTON SERIES CLASSIC COLLECTION



5005-175 Square Top Balusters (1³/₄" wide)

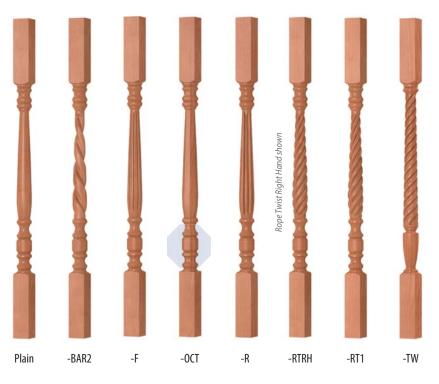



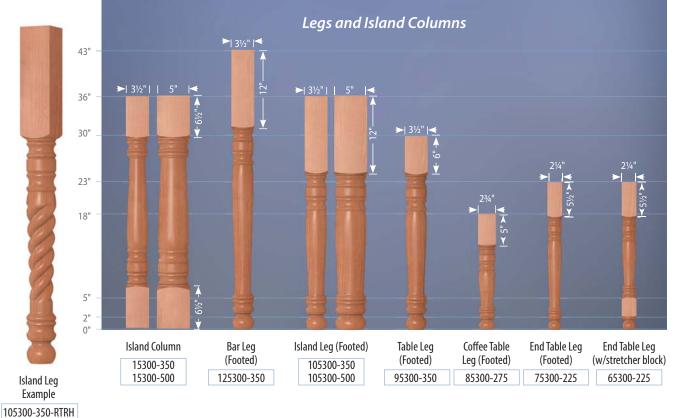





MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Barley 2	BAR2		1		1		
Fluted	F	1	1		1	1	1
Octagon	ост	1	√ *				
Reeded	R	1	1		1	1	1
Dana Turiat	RTLH	1	1		1	1	1
Rope Twist	RTRH	1	1		1	1	1
Rope Twist 1	RT1	1	1		1	1	1
Twist	тw	1	1		1	1	1

Milling
Options
DetailsImage: Second Se



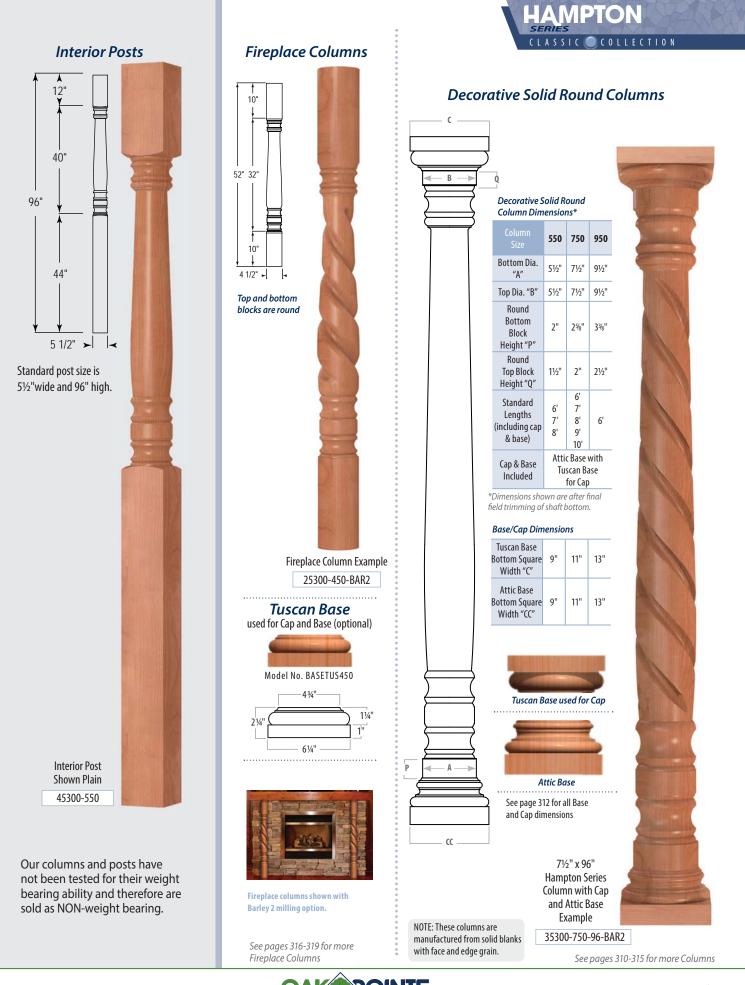

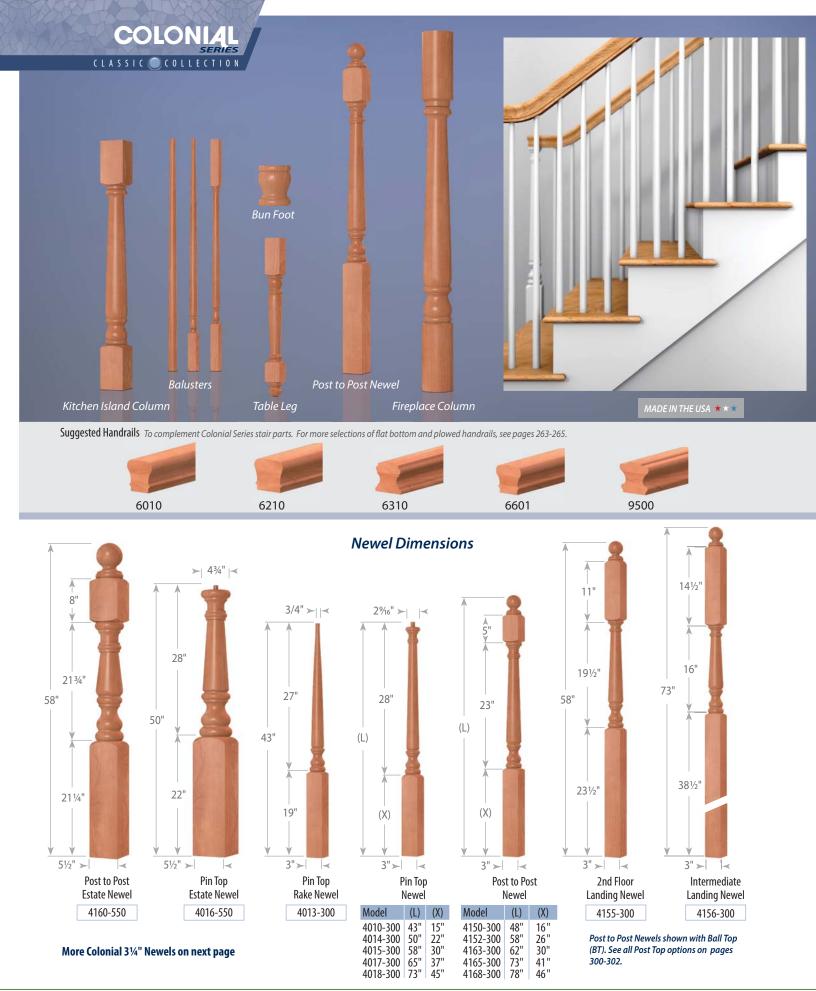









See page 22 for 5 Length Baluster orientation on treads

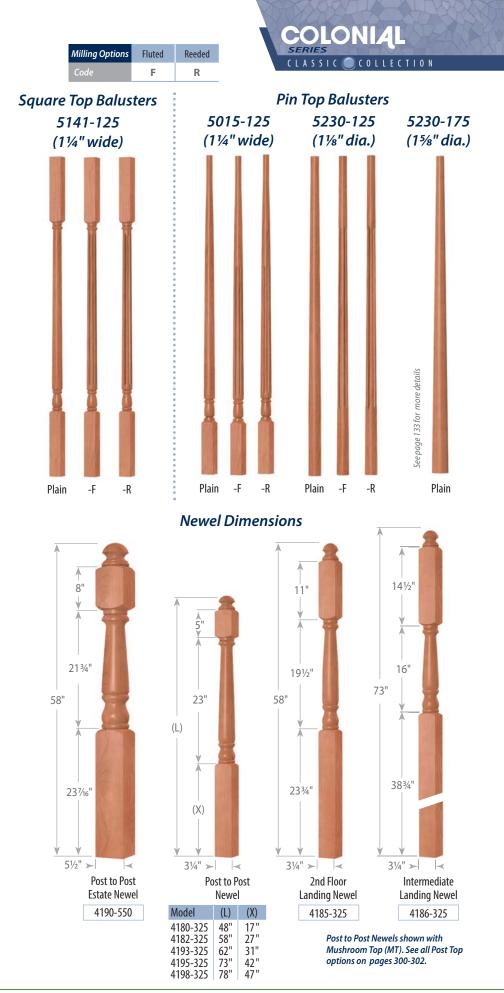




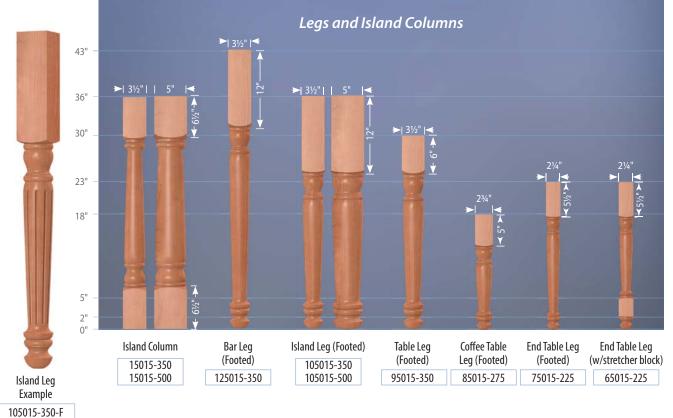



Columns, Legs and Bun Feet Milling Options

MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet	Interior Post	Fireplace Column	Decorative Column
Fluted	F	1	1		1	1	
Fluted Sunburst	F1			1			
Reeded	R	1	1	1	1	1	1
Twist	TW			1			

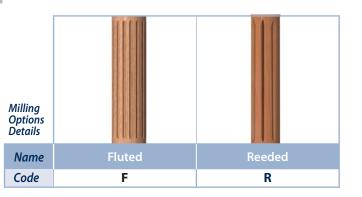



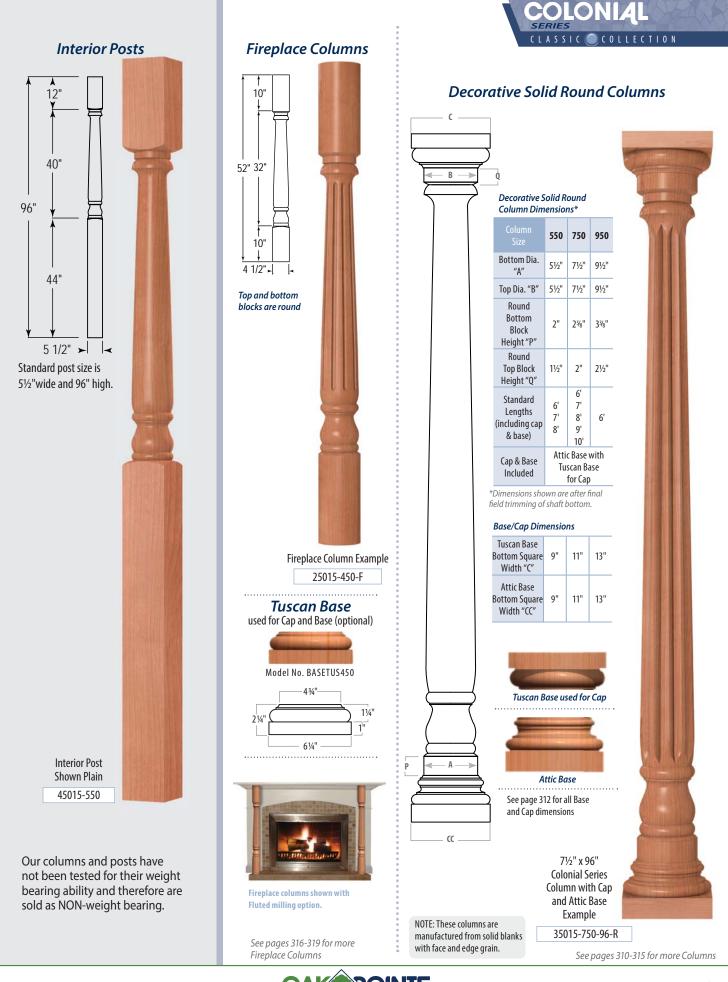

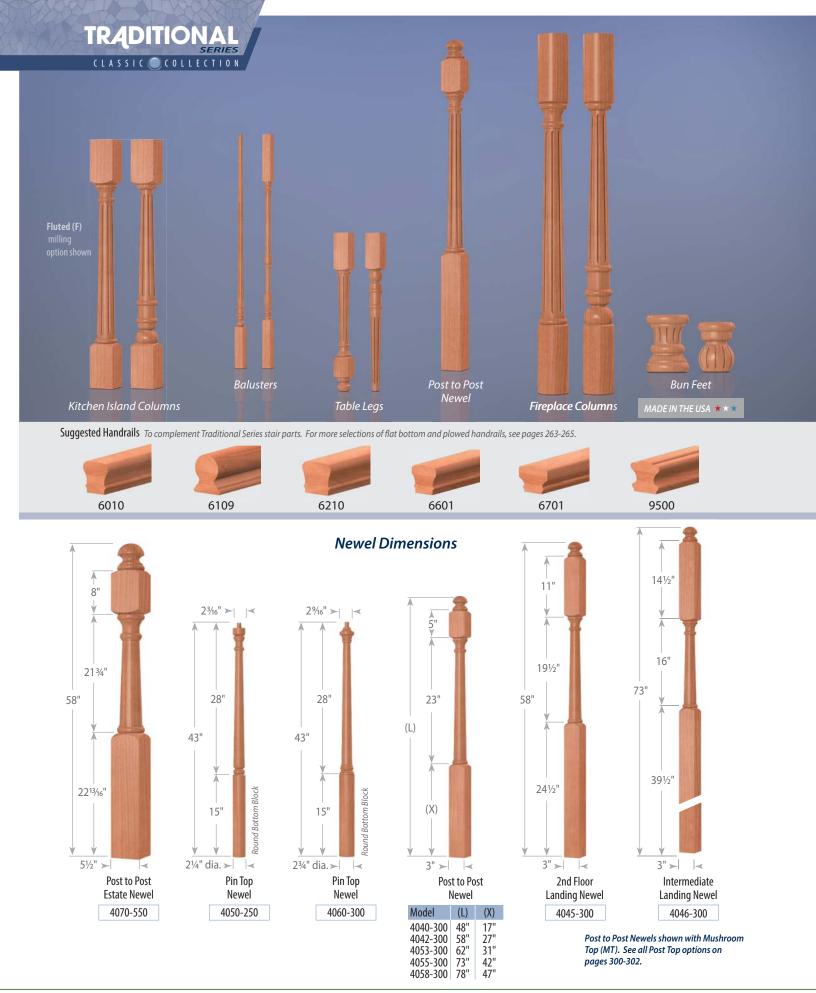



TRADITIONAL





25067-450

Fireplace

Column

15067-350

Kitchen Island

Column

www.StairPartsandMore.com


65067-225


End Table Leg



Most Oak Pointe wood components can be modified to other widths.



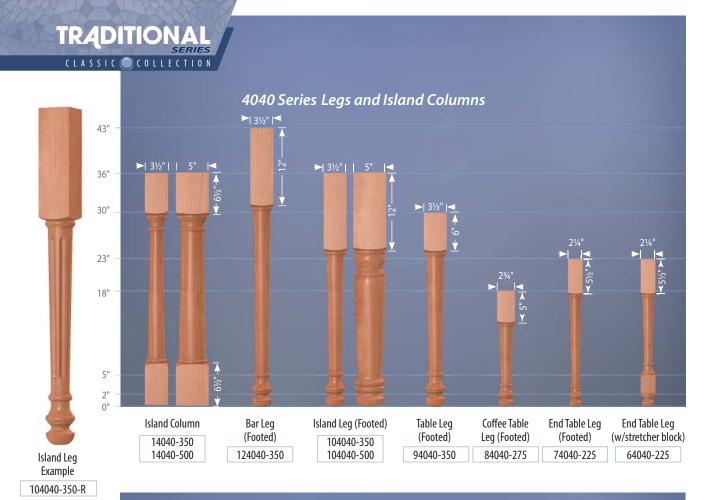

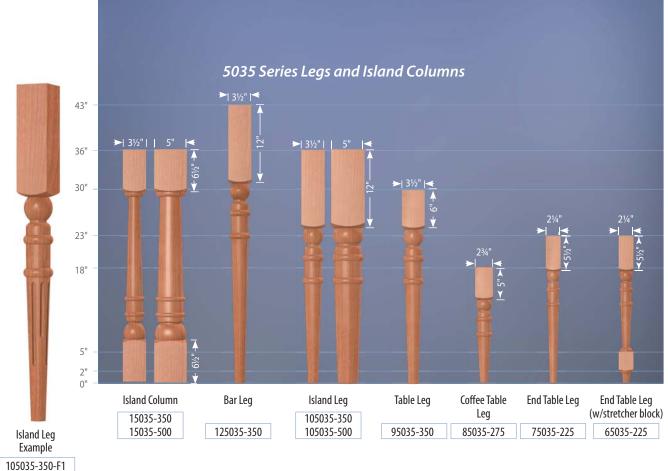





Columns, Legs and Bun Feet Milling Options

(5067 Series plain only except Bun Feet)							
MILLING OPTIONS	CODE	lsland Column	Legs	Bun Feet*	Interior Post	Fireplace Column	Decorative Column
Fluted	F		1	1	1		
Fluted 1	F1	1	1	1	1	1	 ✓
Reeded	R	1	1	1	1	1	1
Twist	тw			1			
*See Bun Feet for available milling options for each series							


[•]See Bun Feet for available milling options for each series








TRADITIONAL SERIES CLASSIC COLLECTION

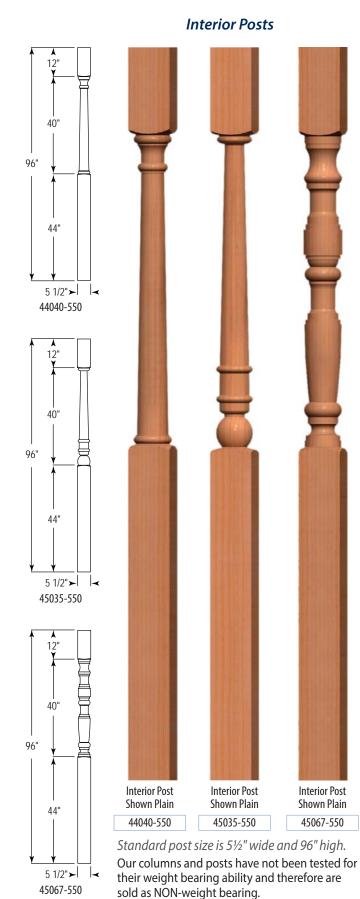


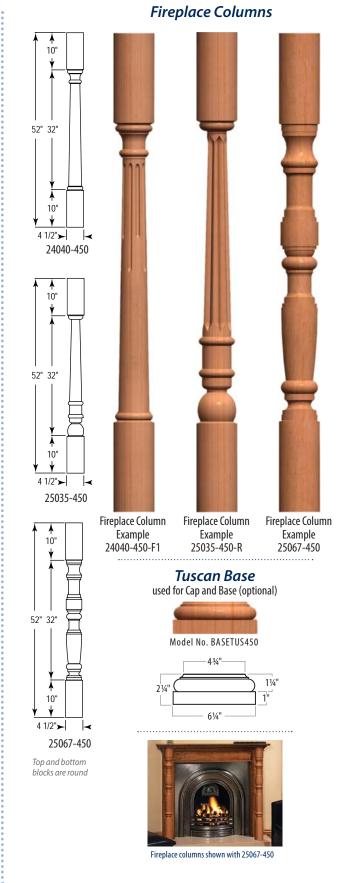

See pages 316-319 for more Fireplace Columns



Decorative Solid Round Columns

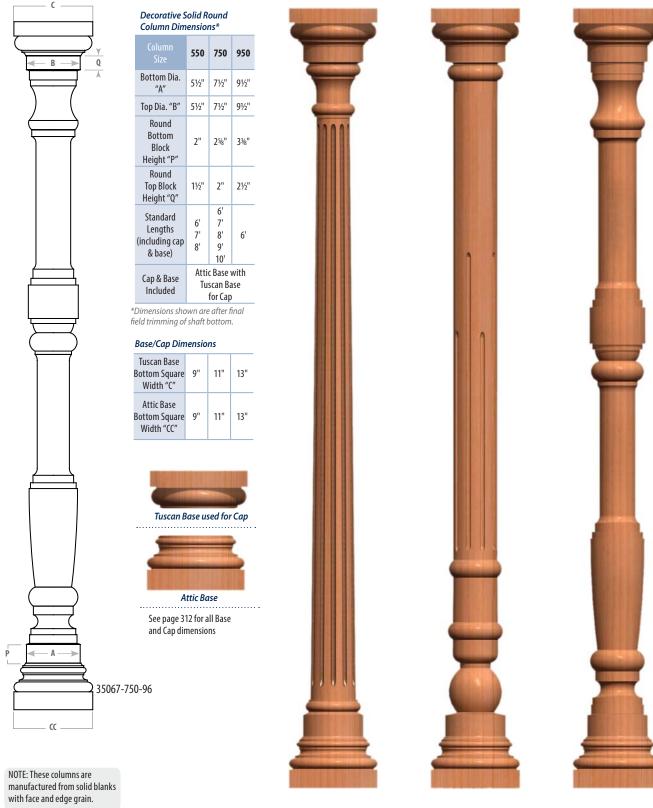

Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing. 7½" x 96" Traditional 4040 Column with Cap and Attic Base 34040-750-96-F

7½" x 96" Traditional 5035 Column with Cap and Attic Base 35035-750-96-F1 71/2" x 96" Traditional 5067 Column with Cap and Attic Base 35067-750-96

TRADITIONAL

COLLECTION

See pages 310-315 for more Columns;

STAIR PARTS AND MORE

With Oak Pointe, choose the size of your newels, balusters and other project needs. 34^n 45^n

4440-325-BT


4440-450-BT

Regency Series Balusters (see page 93)

4450-800-BT

4450-1000-BT

4450-550-BT

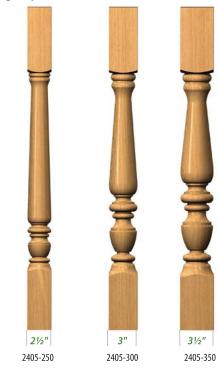



13/4"

2405-175

IRON COLLECTION

IRON from EUROPE and the PACIFIC



Balusters, Shoes, Hardware & Accessories


All components in this collection are for interior use only.









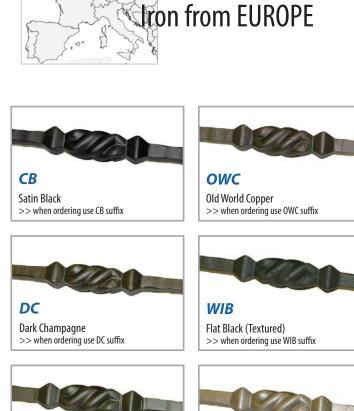

MB Midnight Bronze >> when ordering use MB suffix WN Warm Nickel >> when ordering use WN suffix

Custom Powder Coating

Copper

Our Powder Coating program is being offered to meet the many requests from our customers. Both iron baluster collections, from the Pacific and from Europe, come in several distinguished finishes but now you don't have to settle. Similar to our vast offering of wood species, our Custom Powder Coating program allows you to order iron balusters, stainless steel and aluminum products in most any color that you want.

The 9 elegant colors shown are ones we chose to feature but for hundreds of other choices go to <u>www.ralcolor.com</u>.



Iron from the PACIFIC

1⁄2" 1⁄2" 5 1/16 3 3/4 L43544 • Pg 176 LPLA44 • Pgs 176, 177, 180 L43844 • Pg 176 L43944 • Pg 176 L43244 · Pg 176 L43644 • Pg 176 1⁄2" 5 1/2 5 1/2" 1 5/8* ĥ 25 3/16 L2TW44 • Pg 177 L1BASK44 • Pg 177 L1TW22 • Pg 177 L1KNUC44 • Pg 177 L1TW44 • Pg 177 L2BASK44 • Pg 177 1⁄2" ⁹⁄16" ⁹⁄16" %16" ⁹⁄16" - 11 1/2" ---15 15 L2KNUC44 • Pg 177 L1WAVE44 • Pg 177 L14044 • Pg 178 L15044 • Pg 178 L16044 • Pg 178 L14344 • Pg 178 %16" ⁹⁄16" ⁹⁄16" 5⁄8" 5⁄8" 5⁄8" 2 1/4" C 2 1/4" 1 LPLA44-9/16HM • Pg 178 L30544 • Pg 178 L30844 · Pg 178 L65144 · Pg 179 L65244 · Pg 179 L65344 · Pg 179



SELECTION GUIDE


COLLECTION

IRON

SELECTION GUIDE COLLECTION


IRON

Iron from the PACIFIC (Continued) Hollow Bar 44" H

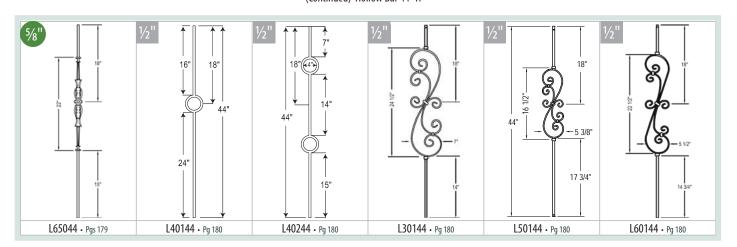

Note: Iron from the Pacific and Iron from Europe balusters are not interchangeable nor are they recommended to be mixed. Their unique finishes will not match each other.

Iron from EUROPE

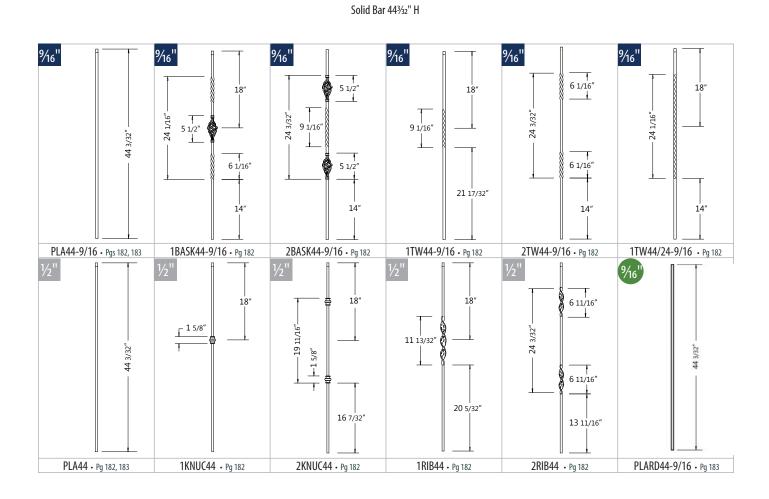





Iron	from	EUROPE
10		1.5

SELECTION GUIDE

IRON COLLECTION

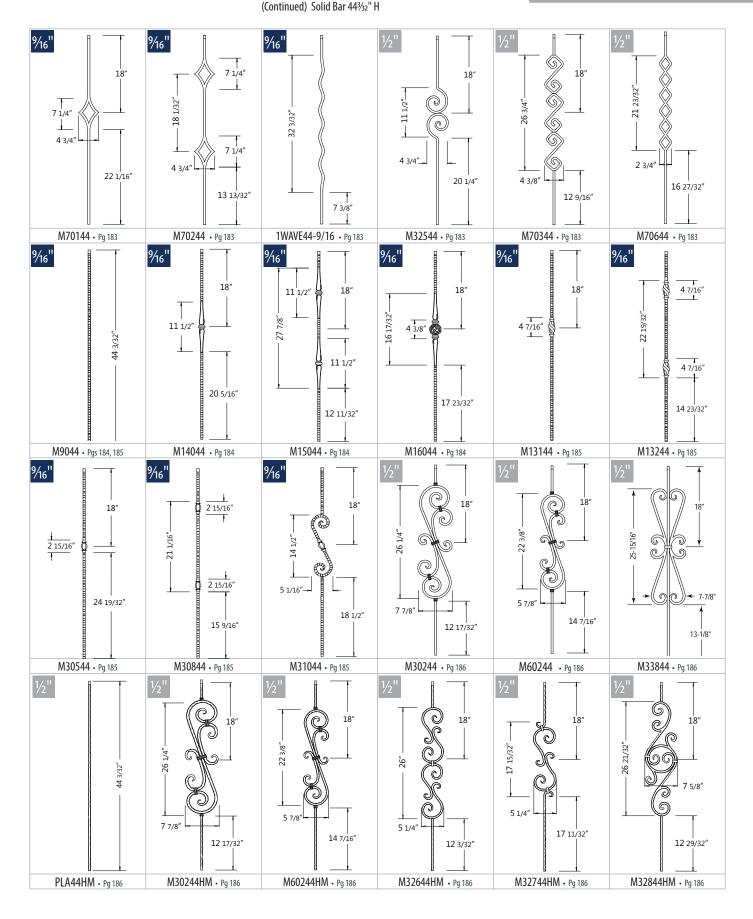



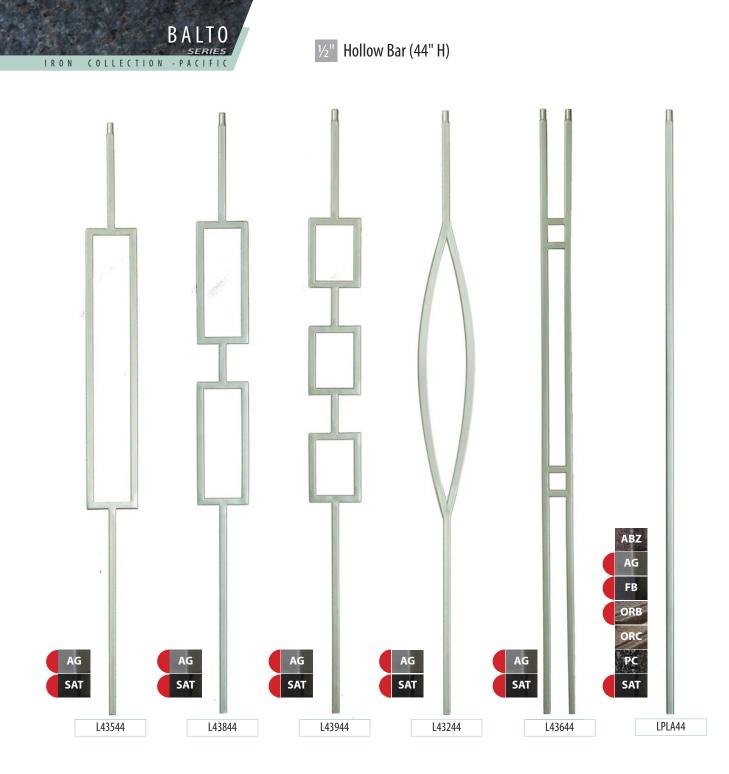



In stock. Other finishes available in 1-2 weeks.













Round Hollow Bar (44" H)

VENETIAN SERIES IRON COLLECTION - PACIFIC



ADHESIVES & TOOLS



In stock. Other finishes available in 1-2 weeks.



Hollow Bar (44" H)



Iron Balusters from Europe




As the market leader for innovative products, Oak Pointe is proud to offer our spectacular high quality European powder coated iron baluster line in six stunning colors. On the following pages you'll find an exquisite selection of geometric shapes, scrolls, smooth, gothic and hammered bars along with traditional styles like ribbons, twists & baskets.


This product line is made entirely from SOLID bar stock with aluminum shoes. Many of these balusters are made from 9/16" bar stock including our twists and baskets which are magnificent compared to the traditional ½" offerings.

Our elegant colors and eye-catching designs have been designed to satisfy the most discriminating architects, designers, homeowners & builders alike! Be innovative and create your own special combinations and panels.














FROM EUROPE

ON COLLECTION


Shown: M32844HM (2), PLA44HM (3)



Shown: PLA44 (2), M32544 (2), M70144 (1)

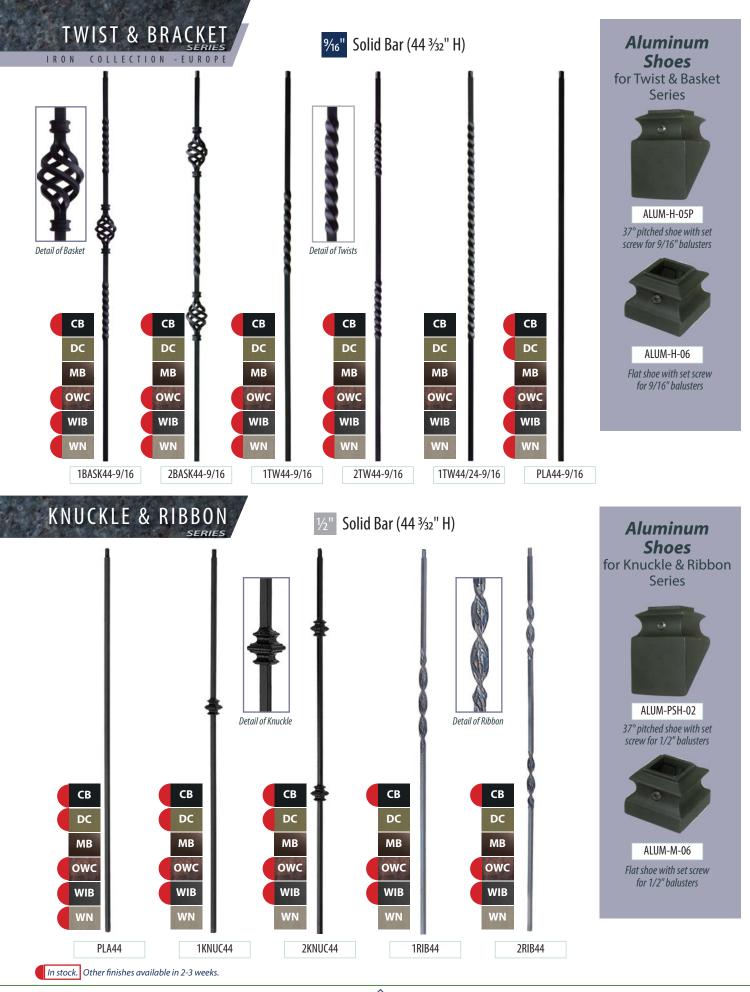



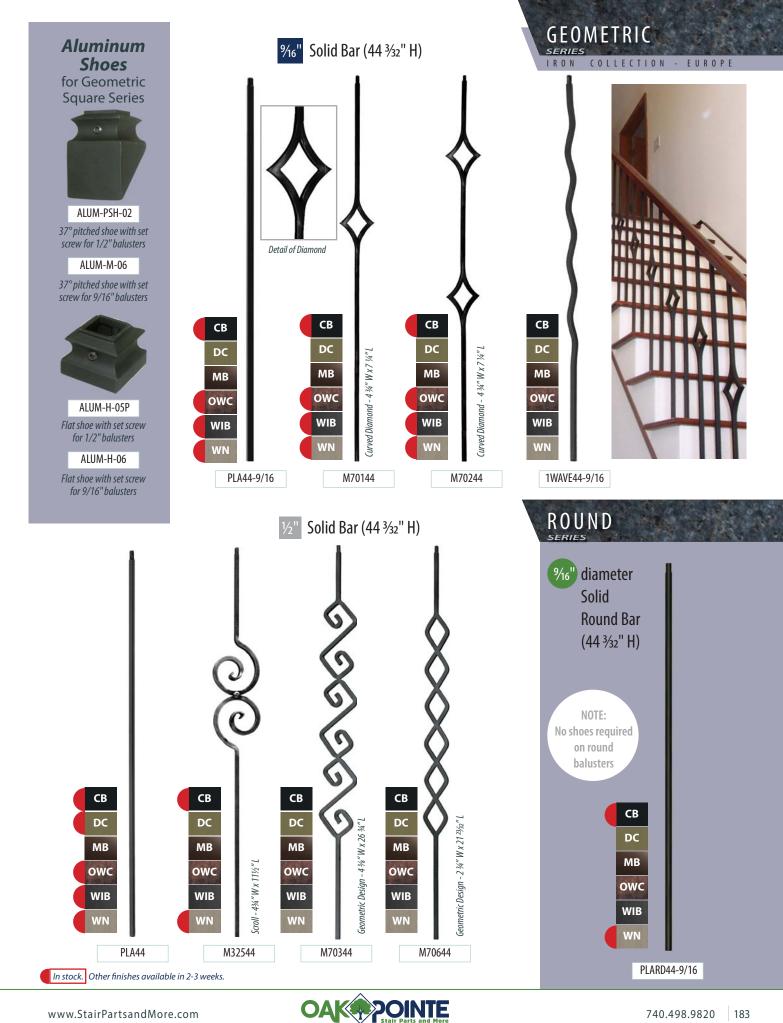






In stock. Other finishes available in 2-3 weeks.



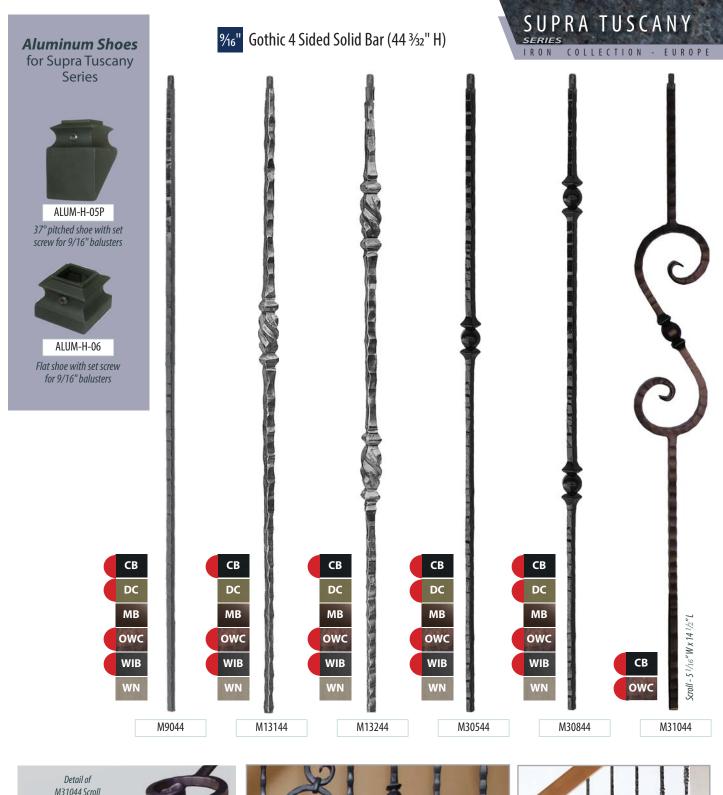




In stock. Other finishes available in 2-3 weeks.



¹/₂" Solid Bar (44 ³/₃₂" H)

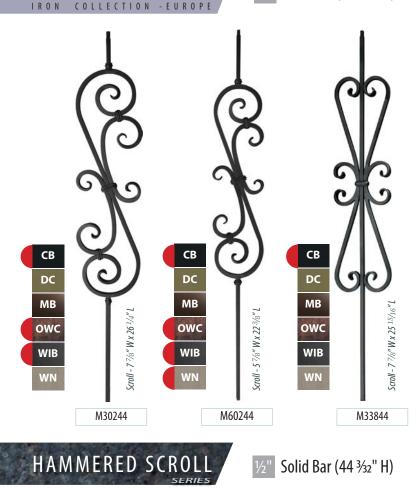

SCROLI

SERIES




Aluminum Shoes for Scroll and Hammered Series



37° pitched shoe with set screw for 1/2" balusters



Flat shoe with set screw for 1/2" balusters

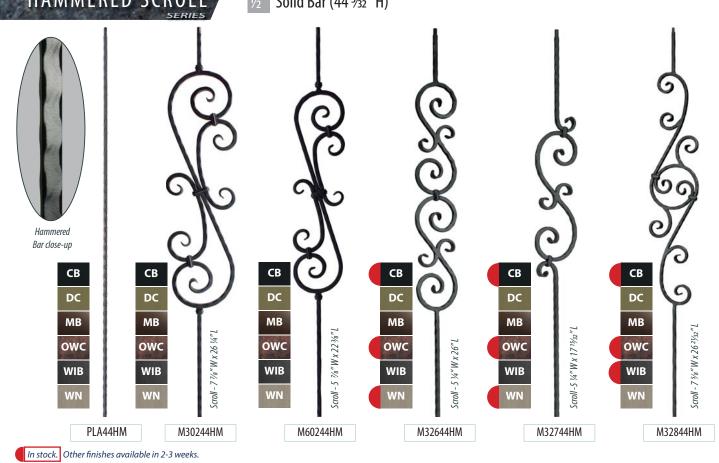



MODERN METAL COLLECTION

STAINLESS STEEL • CABLE • INFILLS

Oak Pointe offers the largest selection of metal components to emphasize new modern staircase and rail systems. Match with all metal or mix with our fine wood products for the desired design of your choice. Any configuration can be achieved by selecting from the large variety of hardware, connectors and infills.

Newels, Rails, Fittings, Cable and Other Infills Components in this collection are for both interior and exterior use. Metal parts are 304 and 316 stainless steel, aluminum or carbon steel, offering the finest materials for any application. Note: Glass is not included.









MODERN METAL

MODERN METAL COLLECTION

Modern Metal Made Easy...



This Modern Metal Collection from Oak Pointe, LLC which includes stainless steel and other metal components is the most comprehensive offering available. While you are welcome to navigate this section and choose your parts, we'll do the work for you. Our program includes the following aspects to make it easy...





Step 1: Send us a copy of the stair or deck plans with measurements and your basic specifications: interior or exterior, type of rail & newels, rake & level rail heights, infill desired-include size and solid or hollow where applicable.



Step 2: Oak Pointe experts will design your railing system and provide you with a quotation, subject to final field measurements.




Step 3: Upon receipt of your order Oak Pointe's CAD department will draw every section of your project. When you receive the drawings, all measurements must be field-verified for accuracy. Upon approval, Oak Pointe will begin fabricating your components.



Step 4: Your order will arrive ready to install and assemble per our drawings. Metal newels will be fabricated & machined, ready to install while stainless steel railings, for example, are to be cut and drilled & tapped in the field for accurate fit. All of the difficult work is done in our shop!




MODERN METAL COLLECTION

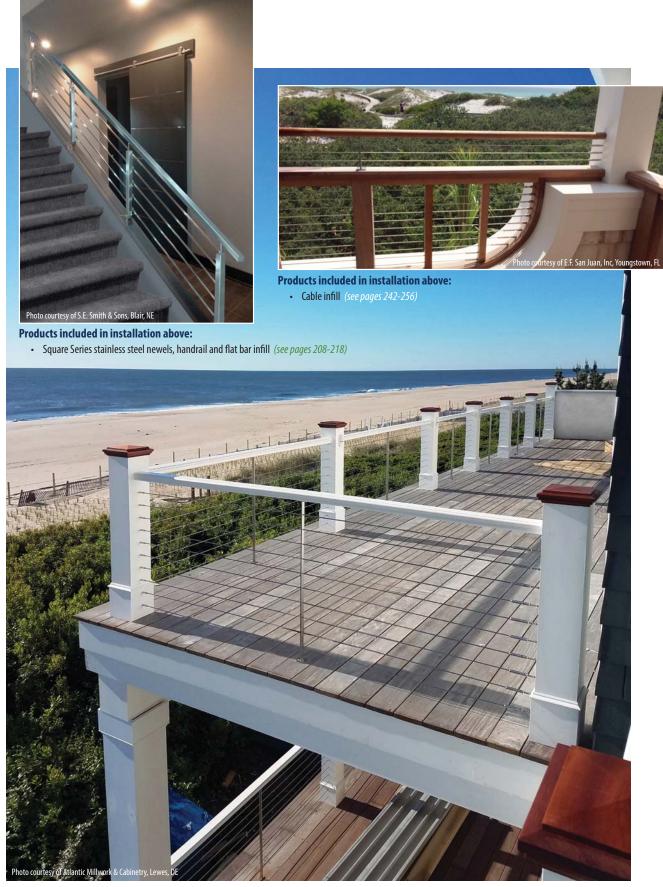


Products included in installation above:Cable infill (see pages 242-256)

MODERN METAL COLLECTION

What's Inside...

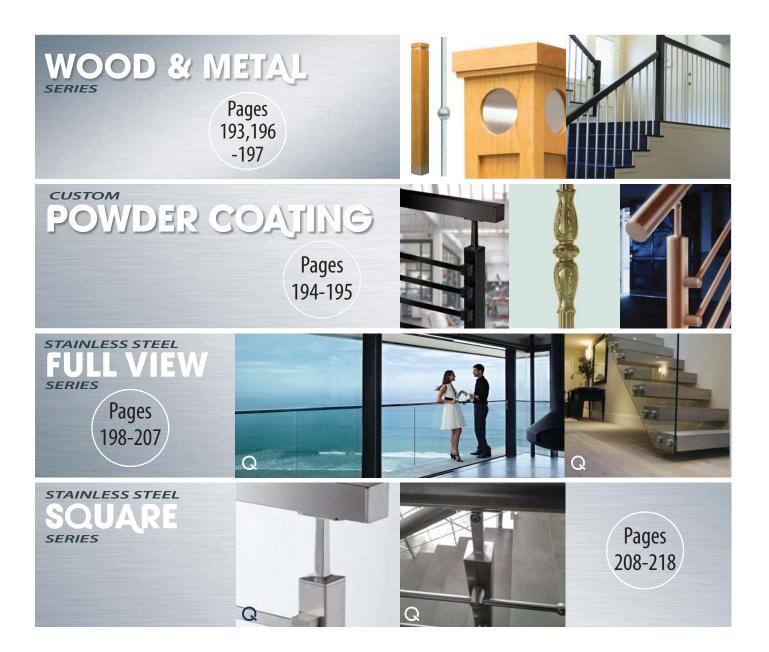



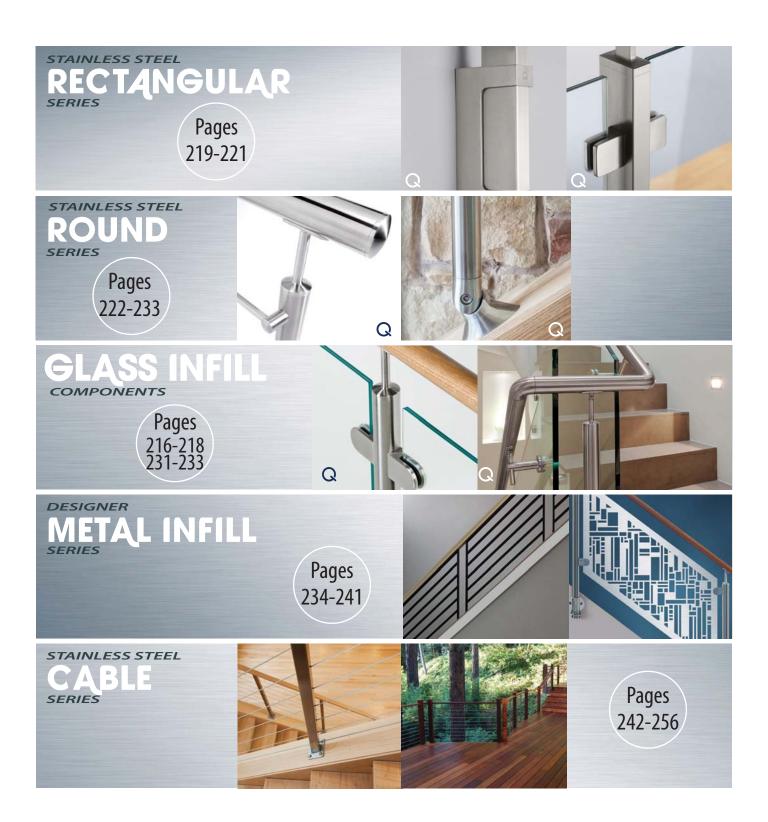



Stainless Steel products in our Oak Pointe Modern Metal Collection have a #4 satin finish. If you desire a polish finish please contact us for availability.







304 or 316 Stainless Steel?

Although not visible to the naked eye, the variance between different grades of stainless steel lies in its composition. As steel is naturally corrosive, different elements are added to make it stainless. The industry standard for interior use is a 304 grade stainless steel. In comparison, 316 stainless steel (marine grade) contains 2% molybdenum, which makes the material more resistant to corrosion caused by cracks, tension and pitting. For outdoor use we recommend 316 grade stainless steel, as the tougher composition gives better resistance in these harsh environments.



but not completely corrosion-proof, as is commonly thought. Stainless steel is a reliable and long lasting material. It is nevertheless necessary to treat it correctly in order to avoid oxidation. Stainless steel can oxidize from some of these common causes: pollution, contact with iron including tools that were used to work with iron and airborne particles. To clean away any harmful residue, we recommend that you treat the entire structure with Q-ultra-clean as soon as it is installed. Repeating this on a regular basis will ensure long-lasting protection.

Protection and Prevention

Our stainless steel maintenance products are specifically for stainless steel and include these items:

- Q-ultra-clean: Removes dirt and surface corrosion and reinforces the protective passive layer.
- Q-cleaner: A stainless steel cleaning spray that removes stains and enhances shine.

information you will need to provide to us.

The key thing to keep in mind with stainless steel is that it is stain "less"

Scotch®-Brite: Polishing pads to remove scratches.

Maintenance	Application	304	316
Low	Indoor structures (no wet spaces).	\checkmark	\checkmark
Moderate	Indoor structures without noticeable chlorine and sulphur dioxide load (e.g. semi-chemical factories).	\checkmark	\checkmark
Medium	Outdoor structures with moderate chlorine and sulphur dioxide load (e.g. inland, at least 15 miles from the coast or other aquatic environments). Recommended <u>periodic</u> maintenance/ preventative maintenance using Q-ultra cleaner.		 Image: A start of the start of
High	Outdoor structures with a high degree of corrosion due to chlorine and/or sulphur dioxide load; high humidity; accumulation of harmful substances (e.g. in coastal regions and swimming pool environments). <i>Recommended <u>frequent</u> maintenance/preventative</i> maintenance using Q-ultra cleaner.		√



Machining Stainless Steel & other metals

Your safety should always be the primary consideration. Always wear safety glasses, ear protection, leather gloves, full length pants and a long sleeve shirt. The parts being cut or drilled will get hot...so be careful. When working with stainless steel, always use clean cutting wheels, blades and drill bits specific to stainless steel.

Aluminum

Aluminum is an extremely lightweight metal that is nevertheless strong. It is therefore especially suitable for applications requiring excellent strength and minimal weight, properties that we have put to good use in our Full View series. Aluminum has a naturally occurring oxide layer that protects the metal from corrosion. This natural layer can be strengthened by anodization so that products then have improved resistance to the effects of weathering. All aluminum products are brushed and anodized, unless otherwise stated in our catalog and all products are therefore ideal for use indoors and outdoors. If the surface is damaged during installation, appropriate protection should be restored.

For cleaning of aluminum and zinc die-cast products use warm water and soap.

Installation & Terminology

Infill space: is the term referring to the horizontal space between newels and the vertical space from the top of the tread, floor, deck, bottom rail, etc to the bottom of the handrail.

Infill: is the term referring to the type of product that will fill the space between newels, treads, floor, deck, bottom rail, etc. and the bottom of the handrail. In this catalog Oak Pointe offers designer metal panels, flat bar, round bar, glass clamps & cable infill.

Newel spacing: when using infill options in this catalog newels should be spaced no more than every 48" (Designer Metal Panels 42") and closer as the elements require. In most cases, cable systems may have newels every 96" with an intermediate cable support every 48" as long as the newels at the start and end of the cable run are heavy duty to where cable has no more than 1/4" flex after tensioning. If you are unsure of your newel requirements to obtain a stable rail system please consult an engineer.

Infill spacing: most local communities require the stairway to meet the 4", 4-3/8" & 6" sphere rules as shown below (please check with your specific building department). Flat, square and round bars & tubes should be installed so the spacing between bars is less than the requirement (in most cases less than 4" on the level and less than 4-3/8" on the rake). Cable is flexible so cables should be installed no more than 3" between each run (3-1/8" on center for 1/8" diameter cable). Certain field conditions and longer runs may require tighter spacing. NOTE: local building codes vary so do not act upon this information without verifying it with your local building official.











For more information please see page 257.



Malta Series (Diamond Collection)

Malta newels with their stainless steel accents are perfect for use with other stainless steel or wood components.

See page 58 or StairPartsandMore.com for more details.

Contemporary Box Newels

Oak Pointe introduces this new line in two sizes and 12 different standard designs to choose from! Flat panel options include: Stainless Steel 304, the newel species or any additional standard or special order wood species. Get creative - mix them to achieve the look and rail configuration desired.

See pages 40-43 or StairPartsandMore.com for more details.








Custom Powder Coating

Our Powder Coating program is being offered to meet the many requests from our customers. Both iron baluster collections, from the Pacific and from Europe, come in several distinguished finishes but now you don't have to settle. Similar to our vast offering of wood species, our Custom Powder Coating program allows you to order iron balusters, stainless steel and aluminum products in most any color that you want.

The 9 elegant colors shown below are ones we chose to feature but for hundreds of other choices go to www.ralcolor.com.

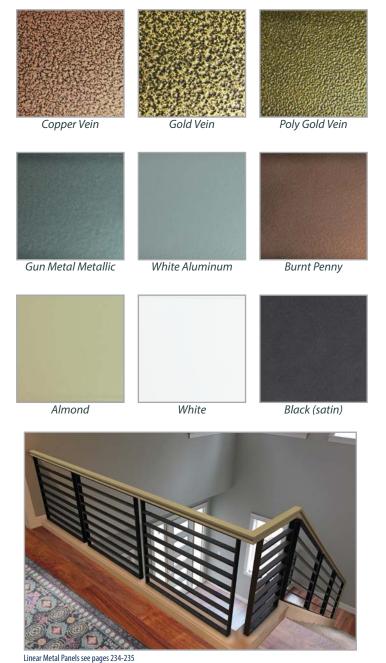

Interior	Exterior				
1					
1	1				
1					
1					
1	1				
1					
Infills (for use with stainless steel newels)					
1	1				
1	1				
1	1				
1	1				
1	1				
1	1				

¹ Not all parts are conducive to being powder coated.
 * Cable & cable fittings are 316 Stainless Steel and are not available powder coated.





Custom Powder Coating Examples



Iron Balusters shown in Copper Vein finish



Modern Metal 1.5" Round Rail, Newels and ½" Round Bar Infill shown in Burnt Penny finish




Detail of Venetian Series L65044 Round Hollow Bar Baluster shown in Poly Gold Vein



L43944

Wood Stair systems with vertical stainless steel balusters!

Order A-501-K Epoxy for use with wood components. See page 197.

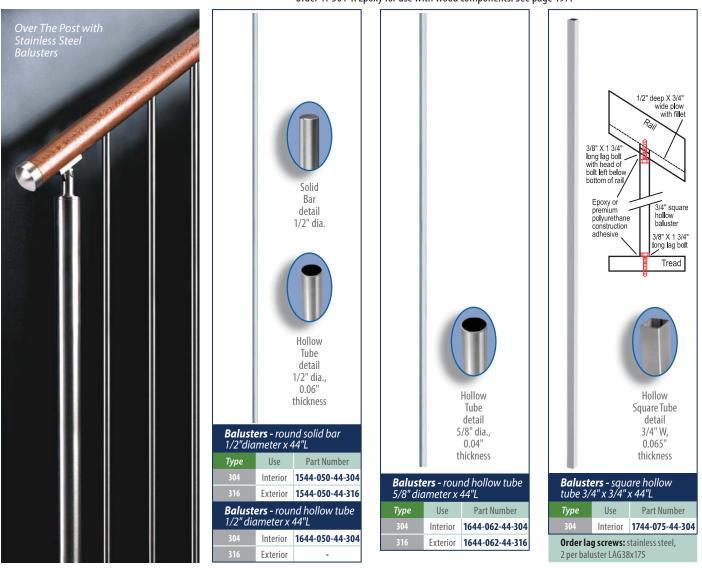

Stainless Steel balusters with decorative round stainless steel accents


Use our 1/2" diameter 304 balusters above with this round sphere to design your very own unique stairway for interior use!



STAINLESS STEEL

ECTION

Use these spheres on horizontal applications too. We also have a sphere end cap for horizontal use. See pages 215 & 230.

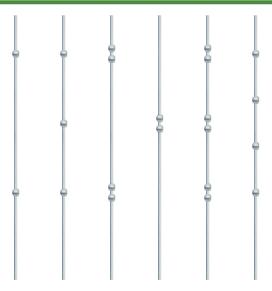

Installation tips: Use Q-ultra clean (see page 257) to clean the areas of the baluster where the sphere will be attached as well as the inside of the sphere (pull cloth through hole). Be sure to completely wipe off the cleaner. Find the location on your baluster where you want the bottom of the sphere(s) to be located and use masking tape to carefully wrap that spot creating a "seat" for the sphere to rest on while the glue is curing. Apply stainless steel glue (page 257) to the baluster where the sphere will be and slide the sphere into place. Wipe off excess glue. After the glue has cured, remove the masking tape and remove any visible glue with acetone.





Combine the warmth of wood with stainless steel to form a unique wall rail system or over the post stairway utilizing our stainless steel newels with stainless steel or wood balusters. Stainless Steel fittings are to be used with our 6039 1³/₄" full round rail and attached to the rail with plastic connector (6039-CON) and epoxy.



rail mounting hardware included (see gauge 6039-GAU2 to drill surface of rail). Wall screws not included. Setback is 2.95"



STAINLESS STEEL a h i dh

п с

Stainless Steel Fittings for 6039 Round Rail

ъ г

90° Cur	ved Quar	terturn -		N				
Can also	be used as l	Jp or Over Easing	90° Qı	ıartertur	n	Articu	lated Ang	gle
Туре	Use	Part Number	Туре	Use	Part Number	Туре	Use	Part Number
304	Interior	6039-600-SS	304	Interior	6039-601-SS	304	Interior	6039-604-SS
Order 603	9-CON Con	nector: 2 required p	er fitting					
Pivoti	ng Conne	ctor	Pivoti	ng Conne	ector	for wall		nector - ations. Be sure to h wall rail brackets
Туре	Use	Part Number	Туре	Use	Part Number	Туре	Use	Part Number
304	Interior	6039-605-SS	304	Interior	6039-670-SS	304	Interior	6039-603-SS
Round	End Cap		Flat El	d Cap			rews not prov	vided
Туре	Use	Part Number	Туре	Use	Part Number	Туре	Use	Part Number
304	Interior	6039-660-SS	304	Interior	6039-665-SS	304	Interior	6039-680-SS
Order 603 ries	9-CON Con	nector: 1 required p	er fitting A-50	1-K		adhesive.		et screw and ews not provided) erly secured to wall.
6039-GA	J2	Fart Repeating the second seco	· · · · · · · · · · · · · · · · · · ·	include: epoxy, / piston, baluste For use caulking	etting Epoxy Kit s 5 oz A-7 A-24 nozzle & will install 30-40 rs both ends. with standard g gun t included).	Return to	N.	39-680-SS 6039-601-SS



6039-CON



Full View Series glass systems offer the ultimate transparency



• Cap rails for glassrectangular & round

STAINLESS STEEL

3118




Base shoe for glassfloor and fascia mount

• Base flanges for glass

• Fascia & other glass adapters

For interior or exterior

Also see Square Series Glass Infill (pages 216-218) and Round Series Glass Infill (pages 231-233)

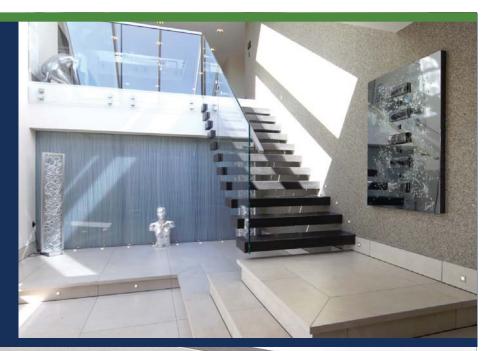



Cap Rails & Fittings Rectangular Cap Rail Systems










14.6920.640.12

196"L, U= 15/16"

Interior

Exterior

Gask for rec	et - tangular or 1.66	"diameter round	d cap rails
Туре	Part Number	Glass Thickness	Size
Rubber	19.5042.211.00	1/2"-9/16" (12-13.52mm)	98"L, U= 15/16"
Rubber	19.5042.216.00	5/8"-11/16" (16.76-17.52mm)	
Rubber	19.5042.219.00	3/4" (19mm)	
Rubber	19.5042.011.00	1/2"-9/16" (12-13.52mm)	196"L, U= 15/16"
Rubber	19.5042.016.00	5/8"-11/16" (16.76-17.52mm)	
Rubber	19.5042.019.00	3/4″ (19mm)	



Glass silicone, color black with nozzle included

19.1340.310.00

10.5 fl oz.

STAINLESS STEEL

-SERIES MODERN META






14.6732.640.12

Exterior



Silicone




Straight	Straight Connector for glass rectangular cap rail Q					
Туре	Use	Part Number	Size			
304	Interior	13.6790.640.12	adds 0.24" to length			
316	Exterior	14.6790.640.12				



Exterior

14.6505.640.12 Order Screws: 4 QS-6

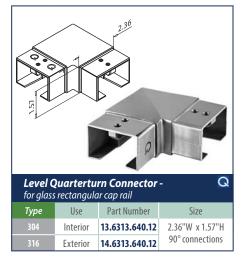














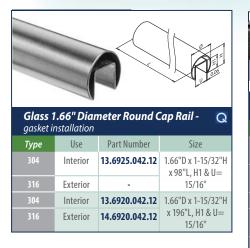

Gask for rec	et - tangular or 1.66	"diameter round	t cap rails
Туре	Part Number	Glass Thickness	Size
Rubber	19.5042.211.00	1/2"-9/16" (12-13.52mm)	98"L, U= 15/16"
Rubber	19.5042.216.00	5/8"-11/16" (16.76-17.52mm)	
Rubber	19.5042.219.00	3/4" (19mm)	
Rubber	19.5042.011.00	1/2"-9/16" (12-13.52mm)	196"L, U= 15/16"
Rubber	19.5042.016.00	5/8"-11/16" (16.76-17.52mm)	
Rubber	19.5042.019.00	3/4" (19mm)	





Glass silicone, color black with nozzle included Silicone 19.1340.310.00 10.5 fl oz.

Wall Rosette -

Туре

for glass 1.66" diam round cap rail Use

Interior

Q

Size

13.6505.042.12 3-35/64" diameter



End Ca for glass	End Cap - Q for glass 1.66" diam round cap rail						
Туре	Use	Part Number	Size				
304	Interior	13.6729.042.12	Projects 0.16"				
316	Exterior	14.6729.042.12					



	Straight Connector - G for glass 1.66" diam round cap rail					
Туре	Use	Part Number	Size			
304	Interior	13.6792.042.12	Completely			
316	Exterior	14.6792.042.12	concealed			







Part Number



Туре

Level Quarterturn Connector -

Use

Interior

Exterior

for glass 1.66" diameter round cap rail

Part Number

13.6313.042.12

14.6313.042.12

Q

Size

1.66" dia.



step two

top or fascia mount

Choose your

a. Base shoe -

b. Base flanges

c. Glass adapters

Our aluminum base shoe systems with stainless steel effect are available for top mount or fascia mount installations for Interior or Exterior use. They feature a stunning design and easy assembly thanks to its innovative Safety Wedge System (glass is being clamped, no drilling necessary). Top mount base shoe has optional water drainage channel for exterior use. Fascia mount shoe has drainage holes in bottom and both have optional stainless steel cladding.

STAINLESS STEEL


Base shoe applications for extremely heavy duty commercial situations are available. Please contact us.

Base Shoe - Top Mount





6 easy steps using the Safety Wedge Kit

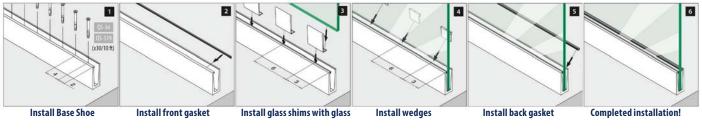




Q



Base Shoe - Top Mount (continued)

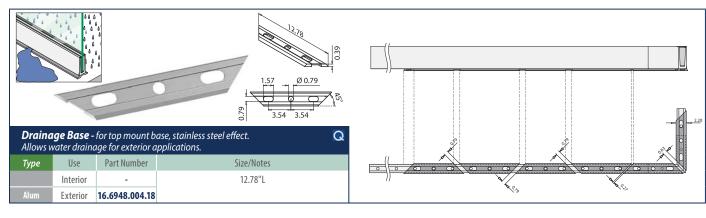






guide to	guide to cut height for correct angle. Apply with 2 sided tape, included.						
Туре	Use	Part Number	Size/Notes				
	Interior	-	Left or right side. For use with cladding must cut				
Alum	Exterior	16.6736.004.18	cladding before cap				



16.6734.004.18

Exterior

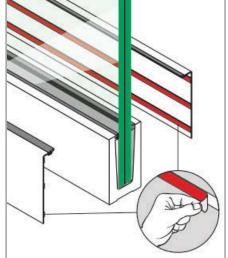











Base Shoe - Fascia Mount (continued)

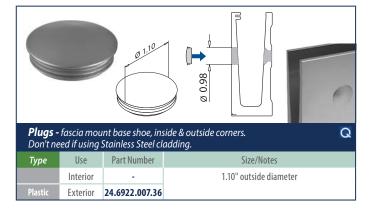


STAINLESS STEEL

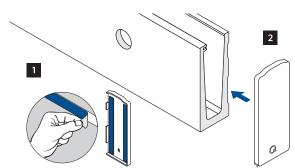





	End Cap - LEFT side level for fascia mount base, stainless steel effect. G Apply with 2 sided tape, included.					
Туре	Use	Part Number	Size/Notes			
Zinc	Exterior	10.6734.105.20	Use Zinc End Cap with cladding option. 1.93"W x 4.96"H $$			
Alum	Exterior	16.6734.005.18	2.05"W x 5.08"H			

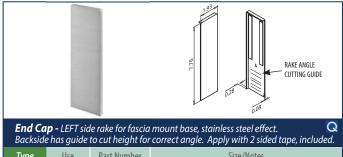


туре	USE	Fait Nulliper	SIZE/ NULES
	Interior	-	For use with cladding must cut cladding before cap
Alum	Exterior	16.6736.005.18	

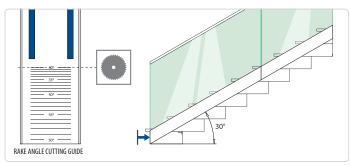

Close up of backside of rake angle End Cap

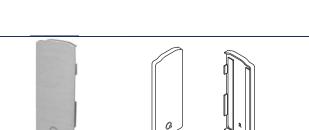


End Cap - RIGHT side level for fascia mount base, stainless steel effect. Q Apply with 2 sided tape, included.				
Туре	Use	Part Number	Size/Notes	
Zinc	Exterior	10.6735.105.20	Use Zinc End Cap with cladding option. 1.93"W x 4.96"H	
Alum	Exterior	16.6735.005.18	2.05"W x 5.08"H	

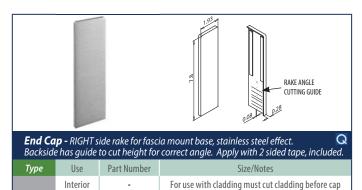

-16.6737.005.18

Exterior

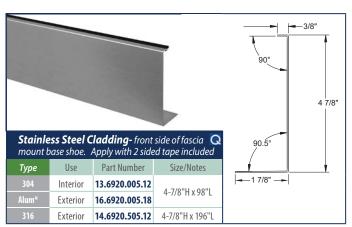

*Stainless Steel effect




STAINLESS STEEL FULL VIEW SERIES MODERN METAL COLLED

Base Flanges







Order Concrete Fasteners: 1 per flange. Interior- QS-238 & Exterior- QS-239. For other installations fasteners by others.

















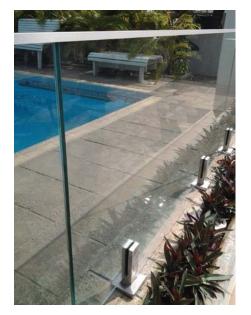




Base Flange - 3.94"W x 1.97"D x 7.09"H G must drill hole in glass.				
Туре	Use	Part Number	Size/Notes	
304	Interior	-	Monolithic	
316	Exterior	14.6212.000.12	tempered glass 1/2" (12mm) thick	


Order Concrete Fasteners: 2 per flange. Interior- QS-36 & Exterior- QS-519. For other installations fasteners by others.








2












Fascia & Other Adapters

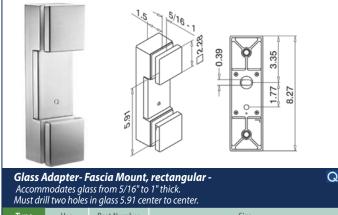


STAINLESS STEEL

COLLECTION


31.


Туре	Use	Part Number	Size
304	Interior	-	2.28"W x 8.27"H, 2.28" sq. fronts,
316	Exterior	14.4762.000.12	built-in spirit level


Order Concrete Fasteners: 1 per adapter. QS-549. For other installations fastener by others.

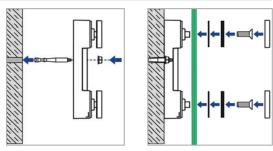








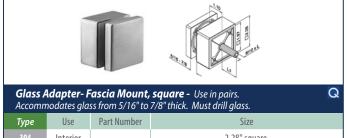


316	Exterior	14.4747.300.12	Bolt = M10 x 3-1/8"L, 3/4" from back side (L1)		
M10 x 3 1/8"1 holt provided is for factoring to metal					

M10 x 3-1/8"L bolt provided is for fastening to metal. Order Concrete Fasteners: 1 per adapter. QS-243. For other installations screw to be provided by other in comparable size.

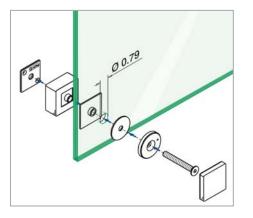



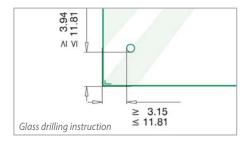



STAINLESS STEEL

		1/4. 5/8*	250 a118 (1) 18 (C)	and O
Glass A Accomn	Adapter, F nodates gla	Fascia Mount, rss from 1/4" to 5,	flat - /8" thick. Must drill glass (19/32	" hole).
Туре	Use	Part Number	Size	
304	Interior	-	1.18" dia. x 0.59" b	ase.
316	Exterior	14.0746.000.12	Screw is M8 x 2". $L1 = 1$	/2" to 7/8".

Tool: Wrench 19.0702.030.00 required. M8 x 2"L bolt provided is for fastening to metal. For other installations screw to be provided by other in comparable size.

Glass Adapter - 1.5" diameter newel. Accommodates glass from 1/4" to 5/8" thick. Must drill glass (19/32" hole).				
Type Use Part Number Size				
304 Interior - 1.18" dia. x 0.59" base.				
316 Exterior 14.0746.038.12 Screw is M8 x 2". L1 = 1/2" to 7/8".				


For other installations screw to be provided by other in comparable size.

Glass Adapter, Fascia Mount, flat - Accommodates glass from 5/16" to 11/16" thick (T). Must drill glass (25/32" hole).				
/ iccomm	iouuics giu		11/10 the (1). Must and glass (25/52 hole).	
Туре	Use	Part Number	Size	
304	Interior	13.0747.000.12	1.97" dia x 0.39" base.	
316	Exterior	14.0747.000.12	Screw is M10 x 2". $L1 = 3/8$ " to 13/16".	
Tool · Wren	ch 19 0702 (150.00 required M	10 x 2"L bolt provided is for fastening to metal.	

Order Concrete Fasteners: 1 per adapter. QS-243. For other installations screw to be provided by other in comparable size.

	Glass Adapter Fascia Mount, flat - adjustable for uneven walls.					
Glass Adapter Fascia Mount, flat - adjustable for uneven walls. Q Use in pairs. Must drill glass (1.02" hole).						
Туре	Use	Part Number		Size		
304	Interior	13.0749.300.12 Glass thickness (T) 1/2" to 1" (12.76-25.52mm)				
316	Exterior	14.0749.300.12	1.97" diameter x 1-3/16" base projection			
304	Interior	13.0749.400.12		/16" to 1" (8.0-25.52mm)		
316	Exterior	14.0749.400.12	1.97" diameter x 1-9/16" base projection			
Tool: Wron	Tool: Wronch 10 0702 050 00 required Order Concrete Eastenary 05 242 and 05 522					

Tool: Wrench 19.0702.050.00 required. Order Concrete Fasteners: QS-243 and QS-533. For other installations fastener to be provided by other.

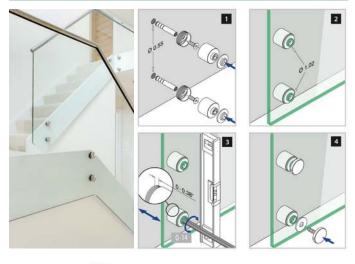

Glass Installation Tool - for adapters with round plates				
Туре	Use	Part Number		
Tool	63/64" to 1-1/10" diameter	19.0702.030.00		
Tool	1.75" to 2" diameter	19.0702.050.00		



For other installations screw to be provided by other in comparable size.





These accessories are a must for every job, see page 257.





STAINLESS STEEL

Newels & Newel Components



Туре

0.31

Туре

Use

Interior

Exterior

Exterior

Use

Interior

Exterior

1. Not recommended for cable systems




Q

Q



For Flat Bottom Rails

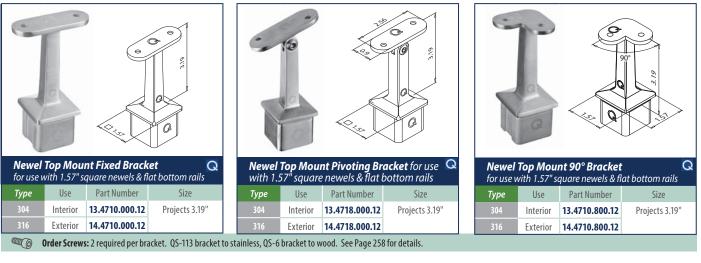

For Round Rails

Ò TI O

O


Q




with 1.57" sq. newels & 1.5" dia. round rail (up to 2" in wood) Туре Use Part Number Size Interior 13.4718.038.12 Projects 3.19" 14.4718.038.12 Exterior Order Screws: 2 required per bracket. QS-111 bracket to stainless, WS-111 bracket to wood. See Page 258 for details.

	Fascia Mc vith 1.57" sq	Q			
Туре	Use	Part Number	Size		
304	Interior	13.4558.040.12	2.01"W x 7.98"L x		
316	Exterior	14.4558.040.12	3.35" projection		
In In	Order Concrete Fasteners: 1 per bracket. Interior QS-232 & exterior QS-233. For other installation fastener by others.				












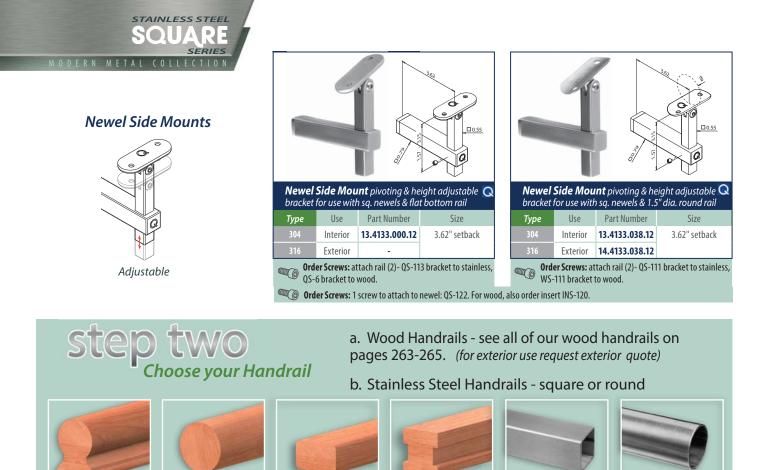



Square Rail Components (also for Square Newels)

	Square Handrail/Tubing 0.08" thick wall Q	
	Type Use Part Number Size	P157
	304 Interior 13.4925.040.12 1.57" x 1.57" x 98"	
	316 Exterior - (40mm x 40mm)"	
	304 Interior 13.4900.040.12 1.57" x 1.57" x 196"	
	316 Exterior 14.4900.040.12 (40mm x 40mm)"	~
Connector- 90 degree for handrail 1.57" sq. Q	End Cap for handrail 1.57" square	Wall Rosette for handrail 1.57" square Q
Type Use Part Number Size	Type Use Part Number Size	Type Use Part Number Size
304 Interior 13.4301.040.12 1.57" x 1.57"	304 Interior 13.4732.040.12 Projection 0.2"	304 Interior 13.4505.040.12 3.74" square
316 Exterior 14.4301.040.12 (40 x 40 mm)	316 Exterior 14.4732.040.12	316 Exterior 14.4505.040.12 Order Screws: 4 QS-6
Connector- 3 way for handrail/newels 1.57" sq Q	Connector - straight for handrail 1.57" square \mathbf{Q}	Connector - adjustable for 1.57" square rail Q
Type Use Part Number Size	Type Use Part Number Size	Type Use Part Number Size
304 Interior 13.4304.040.12 1.57" x 1.57" 316 Exterior 14.4304.040.12 (40 x 40 mm)	304 Interior 13.4790.040.12 adds 0.16" to length 316 Exterior 14.4790.040.12 adds 0.16" to length	304 Interior 13.4312.040.12 Pivots 0° to 70° 316 Exterior 14.4312.040.12 Pivots 0° to 70°
316 Exterior 14.4304.040.12 (40.8.40 mm)	316 Exterior 14.4790.040.12	316 Exterior 14.4312.040.12



Wall Rail Bracket - Q pivoting & height adjustable for flat bottom rail Q					
Туре	Use	Part Number	Size		
304	Interior	13.4145.000.12	3.62" setback		
316 Exterior -					
Order Screws: attach rail (2)- QS-113 bracket to stainless, QS-6 bracket to wood. 1 screw to attach to wall- QS-86					

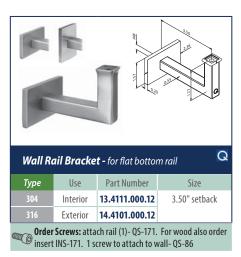



STAINLESS STEEL

Round Rail and Components see more connectors and 1.9" rail in the Round Series Section






Туре	Use	Part Number	Size
304	Interior	13.5729.038.12	Projection 0.24"
316	Exterior	14.5729.038.12	



End Cap - flat top for handrail 1.5" diameter 🛛 📿								
Туре	Use	Part Number	Size					
304	Interior	13.5732.038.12	Projection 0.16"					
316	Exterior	14.5732.038.12						











for 1.5" dia. round rail (up to 2" in wood)							
Туре	Use	Part Number	Size				
304	Interior	13.4145.038.12	3.62" setback				
316	Exterior	-					
Order Screws: attach rail (2)- OS-111 bracket to stainless							


Order Screws: attach rail (2)- QS-111 bracket to stainless, WS-111 bracket to wood. 1 screw to attach to wall- QS-86





STAINLESS STEEL SOUARE SERIES ERN METAL COLLECTION

step three Choose your Infill

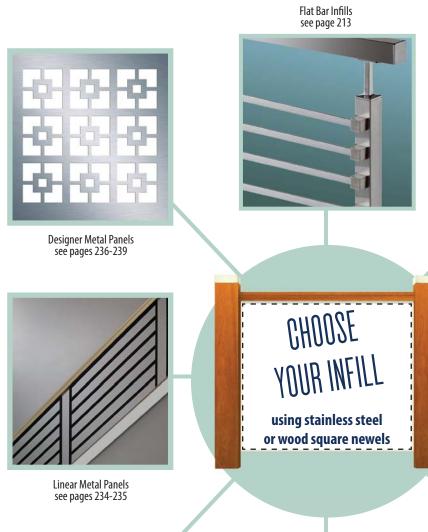




Glass Infill Components see pages 216-218



Round Bar Infills see pages 214-215



Designer Metal Series Wire Mesh Infills see pages 240-241





Cable Infills see pages 242-256

OCOARE Series ODERN METAL COLLECTIO


STAINLESS STEEL


Flat Bar Infill

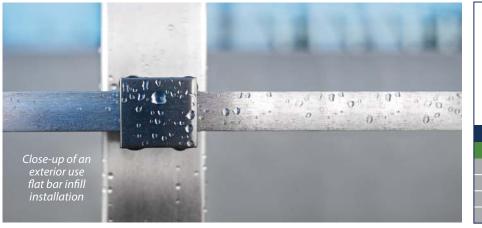



Flat bar can be ordered cut to length.

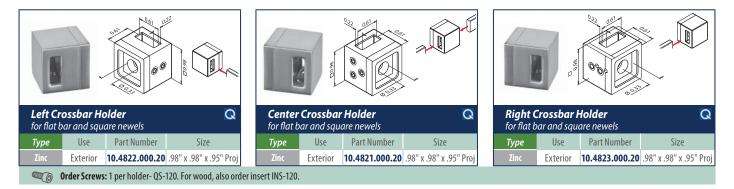

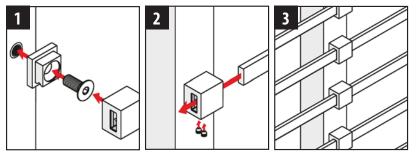

3/4" Square Stainless Steel Balusters

44" long for interior installations Hollow Square Tube detail 3/4" dia., 0.065" thickness See page 196







1/2" solid bar and 1/2" & 5/8" hollow tube can be ordered cut to length. For field cutting order our Tube Cutter below. 1/2" solid bar may be ordered bent to a radius. Order A-501-K Epoxy with wood newels, see page 257.

	Round Solid Bar	Q
	Type Use Part Number	Size
	304 Interior 13.8925.012.12 0.	0.5" dia. x 98"L
A REAL PROPERTY AND A REAL	316 Exterior - (12r	2mm x 2500mm)
		.5" dia. x 196"L
	316 Exterior 14.0900.012.12 (12r	2mm x 5000mm)
	Round Hollow Tube	
	Type Use Part Number	Size
		.5" dia. x 236"L
	316 Exterior - 0.	0.06" thick wall
		.5" dia. x 100"L
		2.04" thick wall
		w bikes
	Tube Cutter	
	for hollow metal tubes	en G-w
	Part Number Notes	Anatr
	SS-TUBE CUTTER 2-5/8"	
	Hollow	air Co
		Like S
I.	Wheel	tesy of
	for Tube Cutter	e contra
	Part Number Notes	Phot
	SS-TUBE-CUTTING Extra	• <u>Newels</u> : 4000 • <u>Rail</u> : Custom 1%16" x 1%16"
	WHEEL wheel	Solid Bar: 1/2" diameter bent to curve of rail by Oak Pointe
		or your local metal shop and cut to length in the field.
8000 070 00		1
	00	is and the second second
Left Crossbar Holder Q	Center Crossbar Holder	Q Right Crossbar Holder Q
for 1/2" diameter bar & square newels	for 1/2" diameter bar & square newels	for 1/2" diameter bar & square newels
Type Use Part Number Size	Type Use Part Number	Size Type Use Part Number Size
304 Interior 13.0832.000.12 0.87" diameter		0.87" diameter 304 Interior 13.0833.000.12 0.87" diameter
316 Exterior 14.0832.000.12 x 1.18" projection	316 Exterior 14.0831.000.12 X I	1.18" projection 316 Exterior 14.0833.000.12 x 1.18" projection
Order Screws: 1 per holder- QS-113 for holder to stainless)S-6 holder to wood	
05		
	2	
	(I) XC	
-90°		
+90°		
	AB .	

0.98


STAINLESS STEEL

COLLECTION



OA

POINTE



1/2" Round Bar Infill (continued)

STAINLESS STEEL

MODERN



5/8" hollow tube can be ordered cut to length or order our Tube Cutter (see page 214). Order A-501-K Epoxy with wood newels, see page 257.

				Round	Hollow 1	Tube, 0.04" thick	wall 📿		-		2
	-			Туре	Use	Part Number	Size		1.0.1		R
				304	Interior	13.8925.016.12					
	_			316	Exterior	-	(16mm x 2500mm)		1		
				304	Interior	13.0900.016.12	5/8" diameter x 196"L	End Co	ap - curvec	l top for 5/8" dian	neter tube 🛛 📿
				316	Exterior	14.0900.016.12	(16mm x 5000mm)	Туре	Use	Part Number	Size
				Steel	Interior	TUBE-0625-100-	5/8" dia. x 100"L	304	Interior	13.0729.016.12	5/32" projection
				Steel	IIIterioi	SAT	satin black finish	316	Exterior	14.0729.016.12	
Center Crossbar Holder Q for 5/8" diameter bar & square newels				E		000			-90° +90		
Туре	Use	Part Number	Size	Conne	ctor- strai	ght for tube 5/8"	diameter 🔍 📿	Conne	ctor- adiu	istable for 5/8" di	a. round tube 🛛 📿
304	Interior	13.0840.000.12	0.98 diameter x 1.46" projection	Туре	Use	Part Number	Size	Туре	Use	Part Number	Size
316	Exterior	14.0840.000.12	. ,	304	Interior	13.0790.016.12		304	Interior	-	-
	ler Screws: 1 -120.	per holder- QS-120. Fo	or wood also order insert	316	Exterior	14.0790.016.12	aaas on 2 1 to rengen	316	Exterior	14.0302.016.12	



Glass Infill Components (note: glass is not sold by Oak Pointe)



Glass Clamps


Glass clamps have been tested according to German Industry norm, DIN 12600. Glass width for outdoor use depends upon wind factor, glass type, glass thickness and clamp used. If you require test data for indoor or outdoor use please contact us. For fascia mount glass installations use Models 24 or 42 with security plate for mounting even to glass bottom or order security pins to use with clamps which are available for all models except 20 and 21.

These products have been designed and developed to meet industry norms and safety code requirements. Before installing always consult a licensed engineer to determine if your railing design meets the local building codes.


Different glass clamps have been designed for tempered and for laminated glass. This guarantees the best clamping results on glass panels.



STAINLESS STEEL



Model 21F - Glass Clamp Q for square newels, 1.1" thick x 1.77" high x 1.77" long. Tested for indoor use only.							
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes		
304	Interior	13.2100.000.12	Clamp only- order 2 pieces of rubber inlays below that match your glass size		Social So		Security Pin Not
316	Exterior	14.2100.000.12			available		
-	-	19.5002.006.00	Tempered Monolithic	15/64" (6mm)			
-	-	19.5002.007.00	Tempered		need 2/clamp		
-	-	19.5002.008.00					
-	-	19.5002.009.00	Laminated	5/16" (8.76mm)			
-	_	19.5002.010.00	Tempered Monolithic	3/8" (10mm)			
Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.							

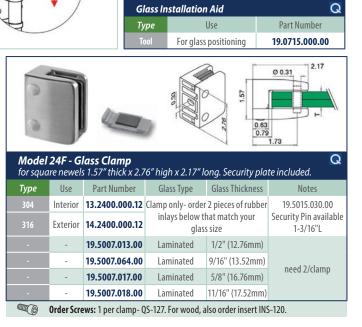

Numbering system for glass clamps

13.2206.000.12

► Finish

Newel type Glass thickness

Glass clamp model


Stainless steel type



90° and straight glass clamp application see page 217.



00	1	Ŋ	THE	2.46	
Model 2	2F - Glas	s clamp for squ	are newels, 1.1" th	ick x 1.77" high x	2.48" long. 🔍
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.2200.000.12	Clamp only- order 2 pcs of rubber		19.5015.022.00
316	Exterior	14.2200.000.12	inlays holow that match glass size		Security Pin available 7/8"L
-	-	19.5004.006.00	Tempered Monolithic	15/64" (6mm)	
-	-	19.5004.007.00	Laminated	1/4" (6.76mm)	
-	_	19.5004.008.00	Tempered Monolithic	5/16" (8mm)	need 2/clamp
-	_	19.5004.009.00	Laminated	5/16" (8.76mm)	
-	_	19.5004.010.00	Tempered Monolithic	3/8" (10mm)	
	Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.				



Model 2	Model 28F - Glass Clamp for square newels 1.35" thick x 1.77" high x 2.48" long. Q					
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes	
304	Interior	13.2800.000.12	Clamp only- order 2			
316	Exterior	14.2800.000.12	inlays below that glass	,	Security Pin available 7/8″L	
-	-	19.5001.008.00	Tempered Monolithic	5/16" (8mm)		
-	-	19.5001.009.00	Laminated	5/16" (8.76mm)		
-	-	19.5001.010.00	Tempered Monolithic	3/8" (10mm)	need 2/clamp (28F) & 4/clamp	
-	-	19.5001.011.00	Laminated	3/8" (10.76mm)	(285 & 28-90)	
-	-	19.5001.012.00	Tempered Monolithic	1/2" (12mm)	X • • • • • • • • • • • • • • • • • • •	
-	_	19.5001.013.00	Laminated	1/2" (12.76mm)		
	Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.					



7.21 IONg	T.21 10119.					
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes	
304	Interior	13.2800.700.12	Clamp only- order 4 pieces of		19.5015.022.00	
316	Exterior	14.2800.700.12	/	ve that match your s size	Security Pin available 7/8″L	



		ss Clamp	HERE C		9 1.73Q
for squa. Type	re newels 1 Use	.1" thick x 1.77" I Part Number	nigh x 2.24" long. : Glass Type	Security plate in Glass Thickness	Notes
304	Interior		Clamp only- order 2		
316	Exterior	14.4200.000.12	inlays below that	inlays below that match your glass size	
-	-	19.5003.008.00	Tempered Monolithic	5/16" (8mm)	
-	_	19.5003.009.00	Laminated	5/16" (8.76mm)	
-	_	19.5003.010.00	Tempered Monolithic	3/8" (10mm)	need 2/clamp (42F) & 4/clamp
-	_	19.5003.011.00	Laminated	3/8" (10.76mm)	(42F) & 4/clamp (42S & 42-90)
-	_	19.5003.012.00	Tempered Monolithic	1/2" (12mm)	
-	_	19.5003.013.00	Laminated	1/2" (12.76mm)	
	(also order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.				

0.94 0.85 0.94 Ø 0.31 0.51

Model 42S - Glass Clamp Straight (glass to glass) 1.1" thick 1.77" high x 3.74" Q long.

Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.4200.700.12	Clamp only- order 4 pieces of		19.5015.022.00
316	Exterior	14.4200.700.12	,	ve that match your s size	Security Pin available 7/8″L



Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.4200.900.12	ciump onij oi	der 4 pieces of	19.5015.022.00
316	Exterior	14.4200.900.12	/	ve that match your s size	Security Pin available 7/8"L




туре	036	I di tivuitibei	diass type	Glass HIICKIESS	NULES
304	Interior	13.2000.000.12	Clamp only- order 2 pcs of rubber		Security Pin Not
316	Exterior	14.2000.000.12	inlays below that I	match glass size	available
-	-	19.5000.006.00	Tempered Monolithic	15/64" (6mm)	
-	-	19.5000.007.00	Laminated	1/4" (6.76mm)	need 2/clamp
-	-	19.5000.008.00	Tempered Monolithic	5/16" (8mm)	
	Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.				


www.StairPartsandMore.com






INSTALL GLASS IN A **DIFFERENT** WAY.

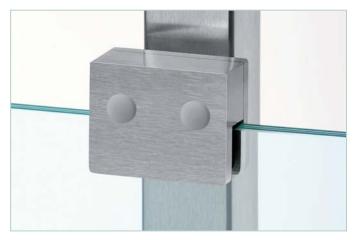





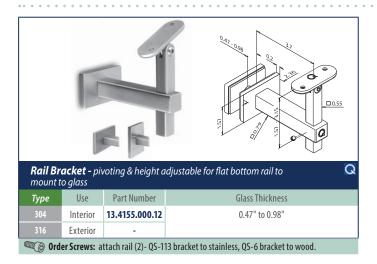





Order required screws and accessories


These accessories are a must for every job, see page 257

		ass Clamp 1.1" thick x 1.97".		i —eei ee-	300 1 1 1 1 1 1 1 1 1 1 1 1 1
Туре	Use	Part Number	Glass Type	Glass Thickness	Note
304	Interior	13.5112.000.12	Tempered	1/2" (12mm)	1 adapter 0723
316	Exterior	14.5112.000.12	Monolithic		required
	Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.				



Model 5212 - Glass Clamp (Double) Q for square newels, 1.1" thick x 2.36" high x 2.36" long					
Туре	Use	Part Number	Glass Type	Glass Thickness	Note
304	Interior	13.5212.000.12	Tempered	1/2" (12mm)	1 adapter 0723
316	Exterior	14.5212.000.12	Monolithic		required
Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.					

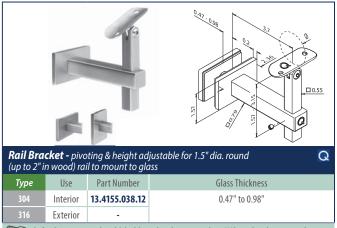






See Glass Standoffs in Full View Series Section. Pages 206-207





Rectangular Newels & Newel Components

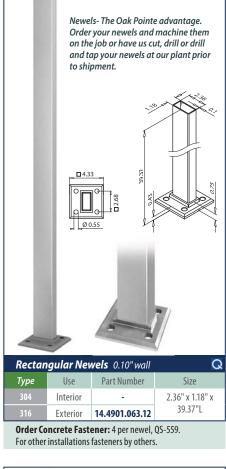






Make your own Newel! See rectangular 2.36" x 1.18" rail/tubing on page 221 for use with flange or fascia mount bracket on page 220.



Newel Top Mount Pivoting Bracket use with Q 2.36" x 1.18" rectangular newels and flat bottom rails					
Туре	Use	Part Number	Size		
304	Interior	-	Projects 3.15"		
316	Exterior	14.4719.000.12			

Order Screws: 2 required per bracket. QS-113 bracket to stainless, QS-6 bracket to wood. See Page 258 for details.

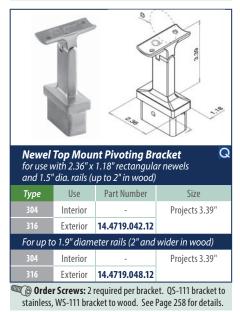



Newel Top Mount Fixed Bracket for use with Q 2.36" x 1.18" rectangular newels and flat bottom rails Part Number

Size

Туре

Use


		1.30	Ĵ,		
for use v	vith 2.36" x	nt Fixed Brack 1.18" rectanguld ıp to 2″ in wood)	ar newels		
Туре	Use	Part Number	Size		
304	Interior	-	Projects 3.39"		
316	Exterior	14.4711.042.12			
For up to	o 1.9" diam	eter rails (2" and	wider in wood)		
304	Interior	-	Projects 3.39"		
316	Exterior	14.4711.048.12			
Order Screws: 2 required per bracket. QS-111 bracket to stainless, WS-111 bracket to wood. See Page 258 for details.					






Rectangular Newels & Newel Components (continued)

Newel Base Flange use with 2.36"x 1.18" rectangular tubes- welded connection Q Type Use Part Number Size 304 Interior - Base: 4.33" x 4.33" 316 Exterior 14.3503.063.00				
304 Interior - Base: 4.33" x 4.33"	Newel B	ase Flang	e use with 2.36"	'x 1.18" rectangular tubes- welded connection 📿
	Туре	Use	Part Number	Size
316 Exterior 14.3503.063.00	304	Interior	-	Base: 4.33" x 4.33"
	316	Exterior	14.3503.063.00	

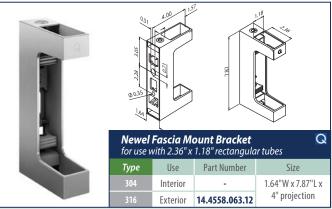

Order Concrete Fastener: 4 per flange, QS-559. For other installations fasteners by others.





For Rectangular Rails and Rectangular Newels


					-			-			
			26.4	Recta	ingular Ha	ndrail/1	ubing (0.78")	0.08" thick wall G	2		ango
	<		2.30	Туре	Use	Part	lumber	Size			
		1	0.08	304	Interio	r	- 2.3	36" x 0.78" x 98"L	DA	A	
				316	Exterio	r 14.492	5.262.12			P	
			810	304	Interio	r	- 2.3	6" x 0.78" x 196"L			
			01	316	Exterio	r 14.490	0.262.12				
End Co		0.78" rectangula		Q	Connec		× 0.78" rectang		Conne		0.78″ rectangul
Туре	Use	Part Number	Size		Туре	Use	Part Number	Size	Type	Use	Part Number
304	Interior	-	Projects 0.39'	'	304	Interior	-	Pivots 0° to 70°	304	Interior	-
316	Exterior	14.5727.262.12	,		316	Exterior	14.4312.262.12	-	316	Exterior	14.5792.262.00
			1.38 1.38	36			259]	0.10	1



A CONTRACT OF THE CONTRACT.						
	Wall Mount Bracket - for 2.36" x 0.78"					
Туре	Use	Part Number	Size			
304	Interior	-	2.62"W x 1.04"H			
316	Exterior	14.4504.062.12				

Order Fasteners: two each of QS-55 and QS-27.









For Rectangular Rails and Rectangular Newels

Rectan 0.10" thi	Rectangular Handrail/Tubing (1.18") Q 0.10" thick wall					
Туре	Use	Part Number	Size			
"304	Interior	-	2.36" x 1.18" x 196" L			
316	Exterior	14.4900.063.12				



for han	for handrail 2.36" x 1.18" rectangular					
Туре	Use	Part Number	Size			
304	Interior	-	Projects 0.39"			
316	Exterior	14.5728.063.12				

	•		AT NUC			
	Connector- Q for newel 2.36" x 1.18" rectangular to handrail					
Туре	Use	Part Number	Size			
304	Interior	-	Projects .039"			
316	Exterior	14.4725.063.12				


Order Screws: 1 per connector QS-127. For wood also order insert INS-120.







Newels & Newel Components

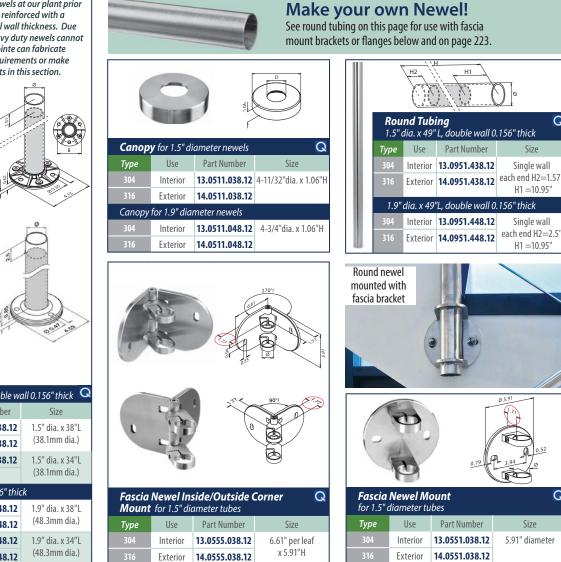

Order Concrete Fasteners: 2 per bracket. Interior- QS-232 & Exterior- QS-233. For other installations fasteners by others. Order End Cap for bottom of tube.




Q

Q

round newels and machine them on the job or have us drill or drill and tap your newels at our plant prior to shipment. These newels are reinforced with a double wall for a 0.156" overall wall thickness. Due to their construction these heavy duty newels cannot be cut to other heights. Oak Pointe can fabricate other lengths to meet your requirements or make your own using the components in this section.

Newels- The Oak Pointe advantage. Order your

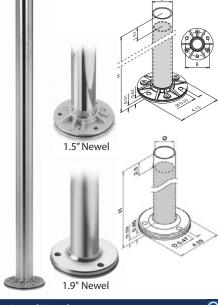



Rounar	Round Newels - 1.5" dia., double wall 0.156" thick 🔍					
Туре	Use	Part Number	Size			
304	Interior	13.0913.438.12	1.5" dia. x 38"L			
316	Exterior	14.0913.438.12	(38.1mm dia.)			
304	Interior	13.0911.438.12	1.5" dia. x 34"L			
316	Exterior	-	(38.1mm dia.)			
1.9" dian	neter, doubl	e wall 0.156" thic	:k			
304	Interior	13.0916.448.12	1.9" dia. x 38"L			
316	Exterior	14.0916.448.12	(48.3mm dia.)			
304	Interior	13.0918.448.12	1.9″ dia. x 34″L			
316	Exterior	14.0918.448.12	(48.3mm dia.)			

Newel & Newel Components (continued)








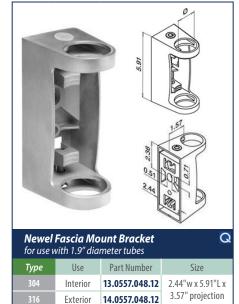





STAINLESS STEEL


MODERN

l p

Newel Base Flange for use with 1.5" diameter tubes - Glue connection					
Туре	Use	Part Number	Size		
304	Interior	-	Base: 3.94" diameter		
316	Exterior	14.0942.038.00			




Canopy for Newel Base Flange 14.0942.038.00 ONLY				
Туре	Use	Part Number	Size	
304	Interior	-	5" diameter x 0.71"H	
316	Exterior	14.0513.038.12		







Newel & Newel Components (continued)



Q

Q



for use v		nt 135° Bracke 1. newels & 1.5″ d		1
Туре	Use	Part Number	Size	
304	Interior	13.0702.338.12	Projects 3.125"	
316	Exterior	14.0702.338.12		017
for 1.5" d	dia. newels	& 1.9"- 2" dia. rai	ls (>2" in wood)	T
304	Interior	13.0702.350.12	Projects 3.125"	
316	Exterior	14.0702.350.12		Į.
	er Screws: 2 p 111 to wood.	oer bracket- QS-111 to	stainless,	,

STAINLESS STEEL PIO SERIES COLLECTION




Newel Top Mount Adjustable Pivoting Q Bracket for use with 1.5" dia. newels & 1.5" dia. rails (up to 2" in wood)					
Туре	Use	Part Number	Size		
304	Interior	13.0700.038.12	Projection adjustable		
316	Exterior	14.0700.038.12	from 1.65" to 5.19"		
for 1.5" d	dia. newels	& 1.9"- 2" dia. rai	ils (>2" in wood)		
304	Interior	13.0700.050.12	Projection adjustable		
316	Exterior	14.0700.050.12	from 1.65" to 5.19"		
Order Screws: 2 per bracket- QS-111 to stainless, WS-111 to wood.					










on pages 263-265. *(for exterior use request exterior quote)* b. Stainless Steel Handrails - round

a. Wood Handrails - see all of our wood handrails







Wall Rosette for handrail 1.5" diameter Q Type Use Part Number Size 304 Interior 13.0505.038.12 3-27/32" diameter

	interior	ISTOSOSTOSOTIE	5 27/52 diameter			
316	Exterior	14.0505.038.12	Order Screws: 3 QS-6			
0			0.4" G			
Wall M	lount Bra	cket for handra	il 1.5" diameter Q			
Туре	Use	Part Number	Size			
304	Interior	13.0504.038.12	D = 1.87"			
316	Exterior	14.0504.038.12	H = 1.38"			
For han	drail 1.9" dia	ameter				
304	Interior	13.0504.048.12	D = 2.21"			
316	Exterior	14.0504.048.12	H = 1.38"			
	Order Screws: 1 each required per bracket. QS-55 and QS-22. See Page 258 for details.					
			0 0			





9200

End Ca	End Cap - curved top for handrail 1.5" diameter 📿						
Туре	Use	Part Number	Size				
304	Interior	13.5729.038.12	Projection 0.24"				
316	Exterior	14.5729.038.12					
curved top for handrail 1.9" diameter							
304	Interior	13.5729.248.12	Projection 0.24"				
316	Exterior	14,5729,248,12					






Connector - straight for handrail 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0790.038.12	adds 0.24" to length	
316	Exterior	14.0790.038.12		









www.StairPartsandMore.com



STAINLESS STEEL RO SERIES



for handrall 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0305.038.12	1-3/16" x 1-3/16" (H)	
316	Exterior	14.0305.038.12		
For handrail 1.9" diameter				
304	Interior	13.0305.248.12	1-3/8" x 1-3/8" (H)	
316	Exterior	14.0305.248.12		



Connector 45° (135°) for handrail 1.5" diameter			Q
Туре	Use	Part Number	Size
304	Interior	13.0300.038.12	1-3/16" x 1-3/16" (H)
316	Exterior	14.0300.038.12	



Туре	Use	Part Number	Size
304	Interior	13.0318.038.12	H1: 1-1/16", H2:
316	Exterior	-	2-7/16", H3: 1-3/16"

Round Rails & Components (continued)



for handrail 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0303.038.12	1-3/16" x 1-3/16" (H)	
316	Exterior	14.0303.038.12		
For handrail 1.9" diameter				
304	Interior	Call	-	
316	Exterior	Call		





for handrail 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0308.038.12	1-3/16" x 1-3/16" (H)	
316	Exterior	14.0308.038.12		



Connector Right Hand 90° Adjustable +/-70° for handrail 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0317.038.12	Н1: 1-1/16", Н2:	
316	Exterior	-	2-7/16", H3: 1-3/16"	








ior i.j didificter fleweis dird i.j didificter flahdidi						
Туре	Use	Part Number	Size			
304	Interior	13.0304.038.12	1-3/16" x 1-3/16" (H)			
316	Exterior	-				
For 1.9"	For 1.9" diameter newels and 1.9" diameter handrail					
304	Interior	Call	-			
316	Exterior	-				



Connector Adjustable (+/- 70°) Q for handrail 1.5" diameter				
Туре	Use	Part Number	Size	
304	Interior	13.0312.038.12	1-1/16" (H)	
316	Exterior	14.0312.038.12		
for hand	lrail 1.9" dic	imeter		
Туре	Use	Part Number	Size	
304	Interior	13.0312.248.12	1-1/16" (H)	
316	Exterior	14.0312.248.12		



Round Rails & Components (continued)



Order Screws: attach rail (2)-QS-113 bracket to stainless, QS-6 bracket to wood. 1 screw to attach to wall- QS-86






Order Screws: attach rail (2)-QS-111 bracket to stainless, WS-111 bracket to wood. 1 screw to attach to wall- QS-86.



Order Screws: attach rail (1) QS-171. For wood also order insert INS-171. 1 screw to attach to wall- QS-86.



 304
 Interior
 13.0122.038.12
 S=2.25" setback

 316
 Exterior
 14.0122.038.12
 S=2.25" setback

 for handrail 1.9"- 2" diameter (>2" in wood)
 304
 Interior
 13.0112.050.12

 316
 Exterior
 14.0112.050.12
 S=2.95" setback

Order Screws: attach rail (2)- QS-111 bracket to stainless,
 WS-111 bracket to wood. 3 screw to attach to wall- QS-6.





STAINLESS STEEL

MODERN

туре	USE	Falt Nulliper	SIZE
304	Interior	13.0145.000.12	3.15" setback
316	Exterior	-	


Q

Order Screws: attach rail (2)- QS-113 bracket to stainless, QS-6 bracket to wood. 1 screw to attach to wall- QS-86.



Туре	Use	Part Number	Size		
304	Interior	13.0140.038.12	S=3.15" setback		
316	Exterior	14.0140.038.12			
for handrail 1.5" diameter					
304	Interior	13.0141.038.12	S=2.25" setback		
316	Exterior	14.0141.038.12	1-1/2" clearance distance		

Order Screws: attach rail (2)- QS-111 bracket to stainless, WS-111 bracket to wood. 1 screw to attach to wall- QS-86.

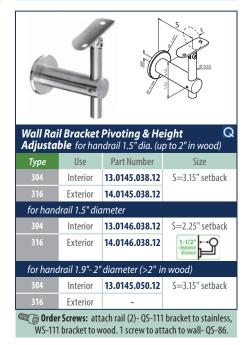










OAK POINTE Stair Parts and More



1/2" Round Bar Infill

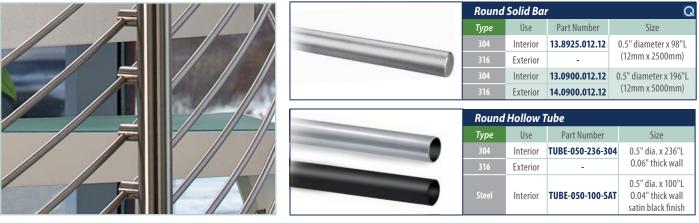

1/2" solid bar and 1/2" & 5/8" hollow tube can be ordered cut to length. For field cutting order our Tube Cutter below. 1/2" solid bar may be ordered bent to a radius.

Q

Size

0.87" diameter

x 1.18" projection

0.87" diameter

x 1.18" projection

Center Crossbar Holder

Use

Interior

Exterior

Interior

Exterior

Туре

for 1/2" diameter bar & 1.5" diameter newels

For 1/2" diameter bar & 1.9" diameter newels

Part Number

13.0831.038.12

14.0831.038.12


13.0831.048.12

14.0831.048.12



Left Crossbar Holder Q for 1/2" diameter bar & 1.5" diameter newels				
Туре	Use	Part Number	Size	
304	Interior	13.0832.038.12	0.87" diameter	
316	Exterior	14.0832.038.12	x 1.18" projection	
For 1/2"	diameter b	ar & 1.9" diamete	er newels	
304	Interior	13.0832.048.12	0.87" diameter	
316	Exterior	14.0832.048.12	x 1.18" projection	

Order Screws: 1 per holder- QS-113 for holder to stainless.




Tube Cutter for hollow metal tubes


Notes 1/4" to

2-5/8" Hollow

Part Number

SS-TUBE CUTTER





Wheel for Tube Cutter					
Part Number	Notes				
SS-TUBE-CUTTING WHEEL	Extra wheel				

Turn heads and corners with our new 1/2" bar holders for 1.9" round newels



		e e e	A Contraction of the second se			
Inside Corner Bar Holder Q for 1/2" diameter bar & 1.9" diameter newels						
Туре	Use	Part Number	Size			

Туре	Use	Part Number	Size	
304	Interior	13.0834.048.12	0.87" diameter x	
316	Exterior	14.0834.048.12	2-3/8" projection	
Min Order Ceremon 1 per helder OC 112 for helder to stainless				

Order Screws: 1 per holder- QS-113 for holder to stainless



5





6





1/2" Round Bar Infill (continued)



Order Screws: 1 per holder- QS-123 for holder to stainless.



Sphere End Cap - 1" diameter with 1/2" blind hole


- apply to round bar with Q-glue				
Туре	Use	Part Number		
304	Interior	SPH-1/2END-304		
316	Exterior	SPH-1/2END-316		




Sphere - 1" diameter with 1/2" through hole - apply to round bar vertically or horizontally with Q-glue						
Туре	Type Use Part Number					
304	Interior	SPH-1/2THRU-304				
316	Exterior	_				



for 1/2" diameter round bar						
Type Use Part Number Size						
304	Interior	13.0830.012.12				
316	Exterior	-	1.10" center to center			







5/8" Round Bar Infill

Round Hollow Tube, 0.04" thick wall							
Туре	Use	Part Number	Size				
304	Interior	13.8925.016.12	5/8" diameter x 98"L				
316	Exterior	-	(16mm x 2500mm)				
304	Interior	13.0900.016.12	5/8" diameter x 196"L				
316	Exterior	14.0900.016.12	(16mm x 5000mm)				
Steel	Interior	TUBE-0625- 100-SAT	5/8" dia. x 100"L satin black finish				

5/8" hollow tube can be ordered cut to length or order our Tube Cutter (see page 229).



Center Crossbar Holder Q for 5/8" diameter tube & 1.5" diameter newels					
Туре	Use	Part Number	Size		
304	Interior	13.0840.038.12	0.98" diameter		
316	Exterior	14.0840.038.12	x 1.46" projection		
For 5/8"	diameter ti	ube & 1.9" diame	ter newels		
Туре	Use	Part Number	Size		
304	Interior	Call	_		
316	Exterior	Call			
Order Screws: 1 per holder- QS-120 for holder to stainless.					







Glass Infill

Glass clamps have been tested according to German Industry norm, DIN 12600. Glass width for outdoor use depends upon wind factor, glass type, glass thickness and clamp used. If you require test data for indoor or outdoor use please contact us. For fascia mount glass installations use Models 24 or 42 with security plate for mounting even to glass bottom or order security pins to use with clamps which are available for all models except 20 and 21. These products have been designed and developed to meet industry norms and safety code requirements. Before installing always consult a licensed engineer to determine if your railing design meets the local building codes.

Different glass clamps have been designed for tempered and for laminated glass. This guarantees the best clamping results on glass panels.



Finish Newel type Glass thickness Glass clamp model





		R of Classics (560 0.63 0.79	
	Model 20T- Glass Clamp for 1.5" diameter newels, Q 0.95" thick x 1.57" high x 1.97" long. Tested for indoor use only.				
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.2000.038.12	Clamp only- order 2		Security Pin
316	Exterior	14.2000.038.12	inlays below that match your		
-	-	19.5000.006.00	Tempered Monolithic	15/64" (6mm)	
-	_	19.5000.007.00	Laminated	1/4" (6.76mm)	need 2/clamp
-	_	19.5000.008.00	Tempered Monolithic	5/16" (8mm)	
Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.					

Q

STAINLESS STEEL

0.63 0.79 Model 25T- Glass Clamp for 1.5" diameter newels, 1.18" thick x 1.77" high x 2.48" long. Q Туре Use Part Number Glass Type **Glass Thickness** Notes 13.2500.038.12 Clamp only- order 2 pieces of rubber 19.5015.025.00 Interior inlays below that match your Security Pin 14.2500.038.12 Exterior available 63/64"L glass size 19.5009.011.00 Laminated 3/8" (10.76mm) _ **19.5009.012.00** Tempered Monolithic 1/2" (12mm) need 2/clamp 19.5009.013.00 Laminated 1/2"(12.76mm) Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.




Glass Infill (continued)

Model 28T - Glass Clamp for 1.9" diameter newels, 1.35" thick x 1.77" high x 2.48" long.					
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.2800.048.12	Clamp only- order 2		
316	Exterior	14.2800.048.12	inlays below that glass	,	Security Pin available 7/8"L
-	-	19.5001.008.00	Tempered Monolithic	5/16" (8mm)	
-	-	19.5001.009.00	Laminated	5/16" (8.76mm)	
-	_	19.5001.010.00	Tempered Monolithic	3/8" (10mm)	need 2/clamp
-	_	19.5001.011.00	Laminated	3/8" (10.76mm)	
-	-	19.5001.012.00	Tempered Monolithic	1/2" (12mm)	
-	-	19.5001.013.00	Laminated	1/2" (12.76mm)	
and			C 407 5 1 1		100

STAINLESS STEEL

COLLECTION

Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.

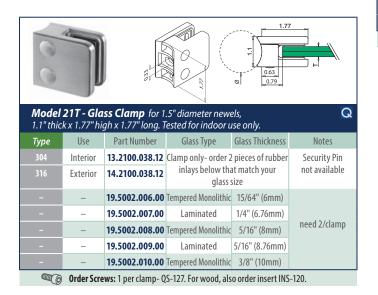

		ISS Clamp for 1. igh x 2.17" long.		vels,	2.17 0.031 0.04 0.79 1.7 Q
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes
304	Interior	13.2400.048.12	1 /	rder 2 pieces of	19.5015.030.00
316	Exterior	14.2400.048.12	,	elow that match ass size	Security Pin available 1-3/16" L
-	_	19.5007.013.00	Laminated	1/2" (12.76mm)	
-	_	19.5007.064.00	Laminated	9/16" (13.52mm)	need 2/clamp
-	_	19.5007.017.00	Laminated	5/8" (16.76mm)	
-	_	19.5007.018.00	Laminated	11/16" (17.52mm)	
	Order Scre	ws: 1 per clamp- Q	S-127. For wood, a	llso order insert IN	S-120.

Model 1.1" thic	42T - Gla k x 1.77" hi	I ss Clamp for 1 gh x 2.24" long. S	.5" diameter newe Security plate inclu	els, ided.	Q	
Туре	Use	Part Number	Glass Type	Glass Thickness	Notes	
304	Interior	13.4200.038.12	Clamp only- order 2		19.5015.022.00	
316	Exterior	14.4200.038.12	14.4200.038.12 inlays below that match your glass size			
for 1.9" o	diameter n	ewels 1.1" thick x	1.77" high x 2.24"	' long. Security	olate included.	
304	Interior	13.4200.048.12	Clamp only- order 2			
316	Exterior	14.4200.048.12	inlays below tha glass s	· ·	Security Pin available 7/8″L	
-	-	19.5003.008.00	Tempered Monolithic	5/16" (8mm)		
-	-	19.5003.009.00	Laminated	5/16" (8.76mm)		
-	-	19.5003.010.00	Tempered Monolithic	3/8" (10mm)	nood 2/clamp	
-	-	19.5003.011.00	Laminated	3/8" (10.76mm)	need 2/clamp	
-	-	19.5003.012.00	Tempered Monolithic	1/2" (12mm)		
-	-	19.5003.013.00	Laminated	1/2" (12.76mm)		
	Order Screws: 1 per clamp- QS-127. For wood, also order insert INS-120.					



Straight & 90 degree glass clamps availble for Models 28 & 42. See Page 217.






Rail Bracket - for 1.5" dia. (up to 2" in wood)				
	unt to giass Use	s with 3.03" setbo Part Number	Glass Thickness	
Туре				
304	Interior	13.0117.038.12	0.31" to 0.69"	
316	Exterior	-		
for 1.9" - 2	for 1.9" - 2" dia. (>2" in wood) rail to mount to glass			
304	Interior	13.0117.050.12	0.31" to 0.69"	
316	Exterior	-		
WS 111 bracket to wood & tool 10 0702 050 00				

WS-111 bracket to wood, & tool 19.0702.050.00.





	Rail Bracket - fixed & height adjustable for flat Q bottom rail to mount to glass with 3.23" setback				
Туре	Use	Part Number	Glass Thickness		
304	Interior	13.0150.000.12	0.47" to 1.18"		
316	316 Exterior 14.0150.000.12				
Order: 2 screws per bracket- OS-113 bracket to staipless					

QS-6 bracket to wood, & tool 19.0702.050.00.



QS-6 bracket to wood, & tool 19.0702.050.00.









g Rail Bracket - fixed & height adjustable for 1.5" dia. (up to 2" in wood) rail to mount to glass with S=3.23" setback Glass Thickness Туре Use Part Number 13.0150.038.12 0.47" to 1.18" Interior 14.0150.038.12 Exterior fixed & height adjustable for 1.5" dia. rail to mount to glass with S=2.25" setback 13.0151.038.12 0.47" to 1.18" Interior Exterior 14.0151.038.12 P fixed & height adjustable for 1.9" - 2" dia. (>2" in wood) rail to mount to glass with S=3.23" setback Interior 13.0150.050.12 0.47" to 1.18"


Exterior 14.0150.050.12 Order: 2 screws per bracket- QS-111 bracket to stainless, WS-111 bracket to wood, & tool 19.0702.050.00.

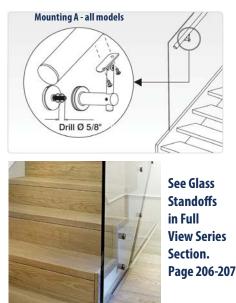

STAINLESS STEEL



QS-6 bracket to wood, & tool 19.0702.050.00.



Туре	Use	Part Number	Glass Thickness	
304	Interior	13.0155.038.12	0.47" to 1.18"	
316	Exterior	14.0155.038.12		
pivoting & height adjustable for 1.5" diam. rail to mount to glass with S=2.25" setback				
304	Interior	13.0156.038.12	0.47" to 1.18"	
316	Exterior	14.0156.038.12	1-1/2" dearance	
pivoting & height adjustable for 1.9" - 2" dia. (>2" in wood) rail to mount to glass with S=3.23" setback				
304	Interior	13.0155.050.12	0.47" to 1.18"	
316	Exterior	14.0155.050.12		
Order: 2 screws per bracket- QS-111 bracket to stainless, WS-111 bracket to wood, & tool 19.0702.050.00.				



and accessories



These accessories are a must for every job, see page 257.



Linear Metal Panels

Create a unique contemporary stairway with our Linear Metal Panels. The options are only limited by your imagination.

- Send us your plans and Oak Pointe will provide a quotation for a Linear Metal Panel stairway.
- Panels can be manufactured for horizontal or vertical use. Recommended for interior use.
- Standard or custom sizes.
- Kneewall (closed stringer) stairs.
- Open stringer stairs.
- Our steel or wood newels should be used to provide strength to your railing system.
- Panels may be installed joined to other panels, joined to wood or metal newels or with spaces between.
- Panels may sit flush to floors and railings or suspended.
- Flush mount panels to bottom of handrail or use plowed rail.
- Panels are made from 1/2" thick x 1¹/₂" wide hollow steel tubes with 0.065" thick walls. Members are connected with



- All installation hardware included to assemble and mount to wood treads and floors.
- Standard color is black. Also available in raw for field finishing (raw steel may have rust which will have to be removed prior to finishing) or in most any powder coat color desired.
- Save money on installation compared to an iron baluster job. Installs with standard tools. Easy to mask-off and finish surrounding areas after our panels are installed.

Design Examples

Open Stringer Stairways

DESIGNER

METAL



- Handrail: 9200
- Rake and level panels installed with spacing between



- Handrail: 9200
- (used as starting newel also)
- Shown with horizontal & vertical panels
- Rake and level panels installed with spacing between


• Level panels installed above the floor



Products included in application

Kneewall (closed stringer) Stairways

- (used as starting newel also)
- Spacer newel used on landing

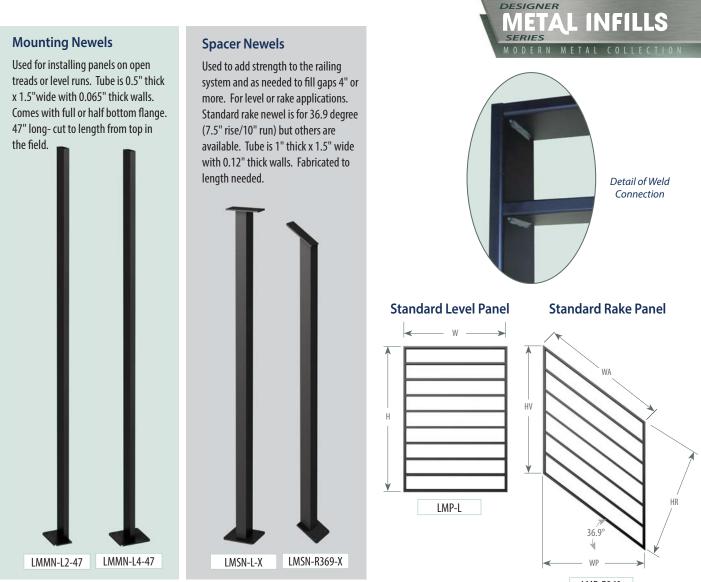

LMP-R369

Tubes on standard panels are 4¹/₈" on center (3⁵/₈" clear space). Other spacing under 4¹/₂" on center is available. **Standard Level Panels. Model Number: LMP-L(width)(height)**

				Standard	Level Panel W	idths (W)		
		12"	18"	24"	30"	36"	42"	48"
Standard Level	33-1/2"	LMP-L1233	LMP-L1833	LMP-L2433	LMP-L3033	LMP-L3633	LMP-L4233	LMP-L4833
Panel Heights (H)	37-5/8"	LMP-L1237	LMP-L1837	LMP-L2437	LMP-L3037	LMP-L3637	LMP-L4237	LMP-L4837

How to determine your level rail height using level panels:

• Flush mounted to floor- panel height plus height of rail. If rail will be plowed then deduct depth of plow.

• Mounted above floor- panel height plus height above floor plus height of rail. If rail will be plowed then deduct depth of plow.

• Curb wall mounted-height of curb wall plus height of panel plus height of rail. If rail will be plowed then deduct depth of plow.

Standard Rake Panels*. Model Number: LMP-R369-(width)(height)

					-		
			Standard Rake Panel Widths (WA)			Height Measured on	
		15"	22-1/2"	30-1/4"	37-1/2"	45"	Rake (HR)
Standard Rake Panel	30-5/32"	LMP-R369-1530	LMP-R369-2230	LMP-R369-3030	LMP-R369-3730	LMP-R369-4530	24-1/8"
Heights (HV)	33-3/8"	LMP-R369-1533	LMP-R369-2233	LMP-R369-3033	LMP-R369-3733	LMP-R369-4533	26-11/16"
Width in pla	n view (WP)	12"	18"	24"	30"	36"	

How to determine your rake rail height using 36.9° panels (formula for other rake panels will vary slightly):

• Kneewall mounted - panel vertical height plus height of kneewall above tread nose plus 1.25 times the height of rail. If rail will be plowed then deduct 1.25 times the depth of plow.

• Mounted above open stringer - panel vertical height plus height above tread nose plus 1.25 times the height of rail. If rail will be plowed then deduct 1.25 times the depth of plow.

* Standard rake panels are for 7-1/2" rise and 10" run (36.9 degrees). Will flex about 1 degree +/-. Panels made for other rakes are available.



Designer Metal Panel Infill

Designer Metal Panels for level or rake applications. Rake panel patterns are available following the tread, following the rake and some designs also available in a staggered pattern. Select one of our designs or we can custom make one for you! Mount your Designer Metal Panels using our stainless steel glass clamps or with a wood frame.

Metal and Finish options (see footnote below about edges)


DESIGNER

LLECTION

These finish images were made as accurate as possible within print limitations. All orders will be confirmed with actual sample finish before production.



^ Aluminum will oxidize but with our clear powder coat finish it will reduce the oxidation and the oxidation that occurs will be more uniform

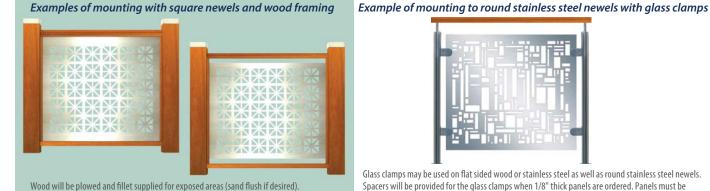

Spacers will be provided for the glass clamps when 1/8" thick panels are ordered. Panels must be drilled or ordered drilled for the security pins.

sdi	Flat sided	Interior 304 Stainless Steel	13.2206.000.12 & security pin 19.5015.022.00
Clamps	newels	Exterior 316 Stainless Steel	14.2206.000.12 & security pin 19.5015.022.00
	<i>.</i>	Interior 304 Stainless Steel	13.2206.038.12 & security pin 19.5015.022.00
Glass		Exterior 316 Stainless Steel	14.2206.038.12 & security pin 19.5015.022.00






Flat sided newels see page 217


Stainless steel 1.5" dia. newels see page 231






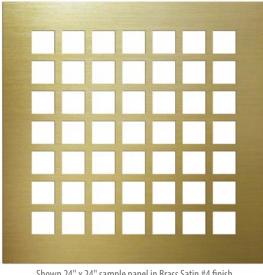


Shown 24" x 24" sample panel in Brass Satin #4 finish

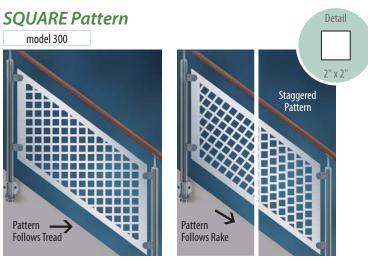

Made to order: custom sizes to your rise and run. Staggered pattern also available.

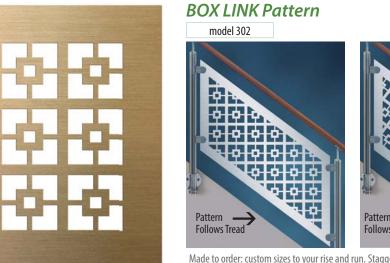

Shown 24" x 24" sample panel in Bronze Satin #4 finish

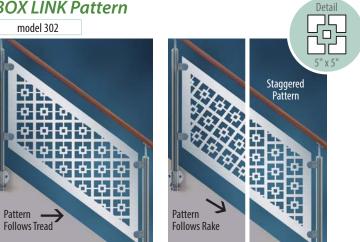

Made to order: custom sizes to your rise and run. Staggered pattern also available.




Shown 24" x 24" sample panel in Aluminum #4 finish



Made to order: custom sizes to your rise and run.



DESIGNER **METAL IN** SERIE COLLECTION

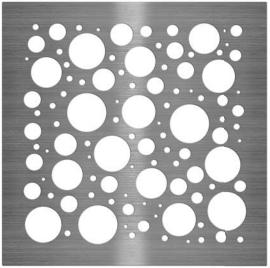

Shown 24" x 24" sample panel in Stainless Steel Satin #4 finish


CHAMPAGNE Pattern



Made to order: custom sizes to your rise and run. Champagne is a random organic design.



Pairing suggestion: Champagne pattern and our box newel models 4630 or 4660 (see pages 40-43) with complementary design U or U1 with wood or stainless steel panels. Order plain sides where you are attaching the metal panels and full length solid internal blocking.

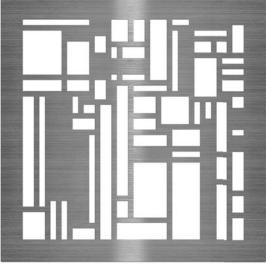

Shown 24" x 24" sample panel in Stainless Steel Satin #4 finish

CUBIC Pattern model 381



Made to order: custom sizes to your rise and run.



Cubic is a random organic design.



Shown 24" x 24" sample panel in Dark Statuary Brass finish



Made to order: custom sizes to your rise and run.





Detail

17" x 17




Shown 24" x 24" sample panel in Light Statuary Bronze finish

HEART FLOWER Pattern



Made to order: custom sizes to your rise and run.

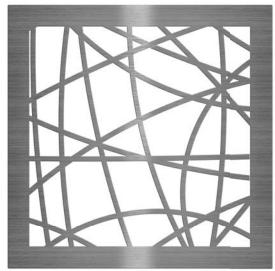

Shown 24" x 24" sample panel in Stainless Steel Satin #4 finish


TANGLED Pattern






Made to order: custom sizes to your rise and run. Tangled is a random organic design.

Add our FLOWER1 to the Tangled Pattern or your own favorite shape.



Tangled Series with FLOWER1- 40" x 36"

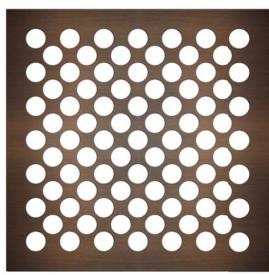

Shown 24" x 24" sample panel in Medium Statuary Brass finish



Made to order: custom sizes to your rise and run.











Designer Metal <u>Wire Mesh</u> Infill

Contact us for a quote request form. Note: visible patterns may vary with change in panel size and for level vs rake panels. Actual width & height of wire mesh panels may vary +/-1/4". The standard width of "U" or "hemmed" edging is 2" so they project beyond the glass clamp.

METAL SELECTION AND FINISH CHART

^ Note copper will patina if left untreated.

[‡] Electropolishing creates a bright, smooth polished luster (not as shiny as Mirror Polished) and provides an excellent passivation of stainless steel.

* Select your Powder Coat color from RAL www.ralcolor.com

3 Ways to finish-off your Wire Mesh Infill edging



Angle Edging Angle Edging is not as refined as U & Hemmed Edging and is suggested for outdoor use.



Designer Metal <u>Wire Mesh</u> Infill

Glass Clamp Examples				
	1/4" Square Woven Weave 980	3/4" Square Intercrimp Weave 984	Aura™ 8857	
Metal Options:	304M, 304E, 316M, 316E, S, SP, GS, GSP	304M, 304E, 316M, 316E, S, SP, GS, GSP	304M, 304E, 316M, 316E, S, SP, GS, GSP	
Thickness of Wire/mesh	1/8" wire with 1/4" overall	1/8" wire with 1/4" overall	1/8 x .105 wire, with 3/8" overall	
Thickness of edging	1/2"	1/2"	1/2"	
Edging styles available +	U, H, A	U, H, A	U, H, A	
	Μ	lounting to Newels-order components for desired installation	n	
Glass Clamps (see page 231-232)	Models 25T or 24T must use security pin	Models 25T or 24T must use security pin	Models 25T or 24T must use security pin	
Glass Clamps square (see page 216-217)	Models 24F or 28F must use security pin	Models 24F or 28F must use security pin	Models 24F or 28F must use security pin	
Wood newels Wood framing	See page 236 for examples			

+ U edging & hemmed edging for exterior use will have weep holes for water drainage.

* + * + * +	
* + * + * +	
î	
i + i + i +	
$\downarrow \uparrow \downarrow \uparrow \downarrow \uparrow$	

	Chateau™ 3105	Shire™ 8148	2" x 1" Rectangle Welded Weave 988	
Metal Options:	304M, 304E, 316M, 316E, S, SP, GS, GSP	304M, 304E, 316M, 316E, C/304	304M, 304E, 316M, 316E, S, SP, GS, GSP	
Thickness of Wire/mesh	0.105" wire with 1/4" overall	1/16" wire with 1/8" overall	1/8" wire with 1/4" overall	
Thickness of edging	1/2"	1/4"	1/2"	
Edging styles available +	U, H, A	U, H, A	U, H, A	
Mounting to Newels-order components for desired installation				
Glass Clamps (see page 231-232)	Models 25T or 24T must use security pin	Model 22T must use security pin	Models 25T or 24T must use security pin	
Glass Clamps SQUARE (see page 216-217)	Models 24F or 28F must use security pin	Model 22F must use security pin	Models 24F or 28F must use security pin	
Wood newels SQUARE SERIES	See page 236 for examples			

+ U edging & hemmed edging for exterior use will have weep holes for water drainage.

Cable Systems Overview

Cable Made Easy – Let Oak Pointe design your cable system. See page 188 to see how easy we make it.

We'll design your project to keep cables on the same plane

STAINLESS STEEL

Our systems will use the same fitting style whenever possible throughout the entire project

Our fittings are more compacted and less costly than the big expensive & unsightly turnbuckle styles

Stainless Steel

Our stainless steel cable, cable fittings and accessories are all 316 grade, unless otherwise noted and therefore suitable for interior or exterior use.

Handrail

Handrail is required on all cable systems to add support to the newels. Bottom rails are optional as long as newels are securely installed.

Newels

End newels - A post where the cable run begins or ends. Placement in relation to a wall may affect which cable fittings can be used. There is considerable tension applied to an end newel when the cable is properly tensioned. A substantial end post is required to prevent the newel from bending and causing the cable to sag. In wood a minimum of $3.5" \times 3.5"$ end newels should be used. In stainless steel use our heavy duty 1.5" and 1.9" diameter round, rectangular or 2" square newels (not the 1.57" square newels). Oak Pointe fabricates 2" square aluminum newels which meets cable/cable manufacturers' requirements, unlike most off-the-shelf aluminum newels . End newel must be installed to prevent newels from deflecting or coming loose when the cables are tensioned.

Intermediate newels - A post that is positioned in the middle of a cable run. Cabling needs to be supported every 48", but a rail system needs newels to provide strength to keep it rigid and safe. So use a newel every 96" or less as necessary to meet local building codes.

<u>Cable braces</u> - Cable will stretch and as a result it needs to be supported every 48". Intermediate newels will act as support and will be structural to the rail system but cable braces may be used where intermediate newels are not needed for strength but to maintain cable support every 48". Cable braces are thinner than newels and therefore less obtrusive than newels but their purpose is to support the cable and they do not supply any structural support to the railing system.

<u>Newels at corners</u> - Cable systems in wood or stainless steel may utilize a single newel or two newels at corners. The drawings below illustrate the design considerations and pros/cons of each option.

the state of the s
-
and the second
-
3
A CONTRACTOR OF THE OWNER

One corner newelcable on same plane. Lag style and through post fittings on same newel.

CONS

Some people

prefer all of the

fittings to match

PROS

Through post fittings cost less than lag style.




cable on same plane. Lag style fittings on both sides.

PROS CONS All fittings match. Lag fittings cost more than

through post fittings.

One corner newel- Cable <u>NOT</u> on same plane. Through post fittings on both sides. Pros- fittings match and are less than lag style. Cons- most people want to see their cable runs on the same plane and do not find this option acceptable.

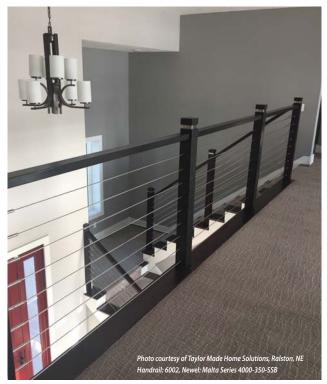

Horizontal cable should be tensioned so there is no more than 1/4" flex in a 48" span.



(Optional) Cable Brace

Max 3" opening between cables

Wood Newels min 3.5" square



Two corner newels- cable on same plane. Cable stops at one newel and resumes at the next one. Any cable fittings can be used to start and stop these runs.

corners which also

increases the cost.

PROS CONS All fittings can Requires 2 newels and the Clean look and more fittings at corner, some than option where people don't like cable runs across

people don't like cable running across corners.



Two corner newels- cable on same plane. Cable runs across corners (not more than 45° angle). Any cable fittings can be used to start and stop these runs. When this option is used with wood newels, protector tubes should be used at the angles to prevent cable from gouging wood.

PROS

PROS All fittings can match and requires less fittings so it is less expensive than stopping and starting the cable runs.

Requires 2 newels and potential aesthetic concerns with cable running across the corner.

CONS

NOTE: If the cable wraps 2 corners then a tensioning fitting will be needed on both ends of the cable run.



242

Cable Systems Overview (continued)

Cable


able may be installed vertically or horizontally. Cable supplied by Oak Pointe has 1x19 construction. 1x19 is considered superior to other construction because it has superior breaking strength, is attractive, smooth to the touch and designed to support loads in tension with minimal stretch. The individual wires in 1x19 construction are much larger than those used in more flexible constructions. This makes our cable less susceptible to damage from abuse and it is also the reason why it does not stretch as much as other constructions.

3/16" diameter cable should be used where higher minimum breaking strength is required or where a larger diameter is aesthetically desired.

Cable is flexible so cables should be installed no farther than 3" between each run (3-1/8" on center for 1/8" diameter cable). Certain field conditions and longer runs may require different spacing. If you'd like testing data please contact us. Horizontal cable should have a newel or cable brace every 48". Vertical cable should have a handrail/shoe rail brace every 24". Horizontal cable runs should be tensioned in the sequence shown in the chart below so there is no more than 1/4" flex in a 48" span when pulled with one finger.

Cable diameters offered:		
Diameter	Minimum breaking strength	
1/8"	1780 lbs	
3/16"	4000 lbs	

Other cable diameters available upon request: 1/4", 5/16" and 3/8"



Cable Fittings

Cable is attached to newels using cable fittings. There are fittings for level runs and for stair (rake) runs and some can be used for both situations. Some fittings tension the cable and others just act as a terminating point at the newel. Most applications require one tensioning fitting on one end and one non-tension fitting on the other end of the cable. Some fittings attach to the cable using a swaged-on stud (Oak Pointe will apply for you) and others attach to the cable using a swageless grip design. Each type of fitting has its advantages. There are 4 ways to order cable and their fittings from Oak Pointe:

- Oak Pointe- cut cable and swage fitting to one end before shipping, use swageless fitting on other end (preferred)
- 2. Job site- cut cable in the field and attach with swageless fittings (preferred)
- 3. Oak Pointe- cut cable and swage fittings both ends before shipping. (not preferred)
- 4. Job site- cut cable in the field and attach with swaged fittings (uncommon)

Swaged fittings: Swaging requires special equipment so on most jobs with swaged fittings Oak Pointe sends the cable already swaged to one end to be used with a Swageless fitting on the other end. Swaged fittings are usually less expensive than the swageless type.


During the design phase of your project Oak Pointe will calculate what you need and your cables will be shipped with a swaged Ferrule or Threaded Swaging Stud attached to one end. The cable will be cut to the final length in the field. As with any installation method, we also recommend the use of special cable gripping pliers to keep the cable from turning when you tighten the fittings to tension the cable. Cable cutters and cable gripping pliers are shown on page 256.

Swaging can be done in the field on one or both ends with special equipment. Please call if you are interested.

Swageless fittings: can only be used with 1x19 cable and are available for 1/8" and 3/16" diameters (specify when ordering).

Cables are installed into swageless fittings by hand at the job site and do not require special equipment, other than cable cutters & cable gripping pliers.


Swageless fittings are often more costly than swaged fittings. However, on smaller projects, using all swageless fittings can be cost effective.

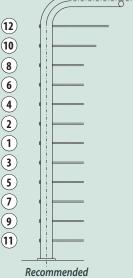


Tensioning Sequence



<u>Rake-to-level or level-to-rake transitions</u> - Transitions from rake-to-level or level-to-rake can be accomplished by bending the cable as shown in the two examples or the cable runs can be stopped and resumed using a common newel at the change with inside mount hardware- see example.

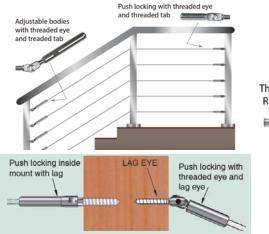

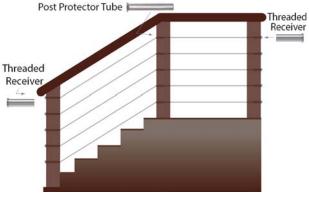

NOTE- Usually cable runs have a tensioning fitting on one end, but a tensioning fitting on both ends is needed in certain applications such as:

- Runs over 50', except runs over 25' with Threaded Receivers
- Cable runs that bend twicee.g. level to rake & back to level, or applications using 2 newels at the corners. The cable spans both newels doing this through 2 turns.



STAINLESS STEEL CABLE SERIES

e

.

.

.

.

.

shown in Raw

Aluminum



step one

Choose your newels and cable braces

- a.) Square Wood Newels: such as our Avenue i and Malta Series
- b.) Stainless Steel:
 - Round 1.5" and 1.9" diameter
 see Round Series pages 222-224
 - Square- 2" heavy duty. See page 245.
- C.) Aluminum:
 - Square 2" with 1/4" thick wall
 - Exterior grade powder coatinghundreds of color choices.
 See standard colors on page 194

2" Square Newels & Newel Components

Powder Coated Aluminum - Exterior or Interior

Colors are in! Oak Pointe's aluminum newel comes in nine Standard colors with hundreds of other options available. With a heavy duty flange and 1/4" thick wall they are built with cable in mind, unlike other less substantial aluminum newels on the market today. We recommend our through newel cable fittings for use with our aluminum newels.^ Our powder coat finish is exterior rated so these newels may be used on the interior or exterior.

Your newels will be fabricated for your specific job- cut to length, machined for your cable fittings and finished with the powder coat of your choice! See standard colors on page 194 and <u>www.ralcolor.com</u> for all of the possible choices.

The rail bracket will be attached to your newel with a curved (shown) or flat saddle (curved up to 2" diameter rail) based upon your hand rail choice and rail mounting screws will be included (no newel mounting screws). Bracket projection is 1.93".




^ NOTE: environmental conditions can cause corrosion when dissimilar metals touch one another. Our Nylon Bushing keeps the stainless steel fittings from coming into contact with the aluminum newels. The head side of the through newel fitting will hold the bushing in place while a dab of silicone (provided by others) will hold the cable side bushing in place.

Statr Parts and More

- Standard colors- see page 194
 - Burnt Penny
 - Gun Metal Metallic
- White Aluminum
- Almond
- Black
- White
- Poly Gold Vein
- Gold Vein
- Copper Vein
- Touch-up kits provided






shown in Black

Powder Coated

Aluminum



2" Square Stainless Steel Newels & Newel Components

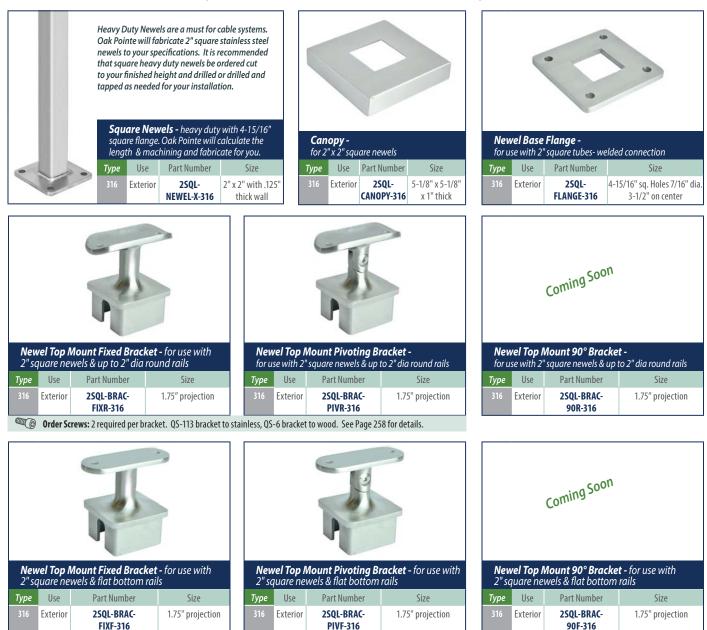

Order Screws: 2 required per bracket. QS-113 bracket to stainless, QS-6 bracket to wood. See Page 258 for details.









Cable Braces

Cable brace options (may use newels instead). Cable requires support every 48". Where you don't need a newel use cable braces. Braces are not a structural

member of your rail system. In a wood framed system a wood member maybe used as a cable brace or one of the metal options shown below.

Stainless Steel Cable Brace - 1/4" thick x 1" wide (trim to length required). Holes/slots drilled 3-1/8" on center.					
Model	Application	Length	Hole Type	Nbr Holes	
CAB-CB34.5-SS10	Level	34.5"	Round	10	
CAB-CB40.5-SS12	Level	40.5"	Round	12	
CAB-CBS34.5-SS10	Rake	34.5"	Slotted	10	
CAB-CBS40.5-SS12	Rake	40.5"	Slotted	12	

STAINLESS STEEL

CAB-FLP-CB Cable Brace Floor Plate

Order Plates: 2 per brace- CAB-FLP-CBS to attach to flat bottom rails, subrails, decks or treads. Screws not included.


	• • •	• •			
Aluminum Cal required). Holes c			2″L (trim to le	ngth	
Model	Color	Application	Hole Type	Nbr Holes	
CAB-CB42-ANAL-13	Anodized	Level	Round	13	
CAB-CB42-BLAL-13	Black	Level	Round	13	
CAB-CB42-ANAL	Anodized	Rake		slots can be	
CAB-CB42-BLAL	Black	Rake	drilled to match job		
Order Connectors			el & CAB-BCPS	for rake.	






CAB-BCPS Brace Connector-Stair

Newel Accessories

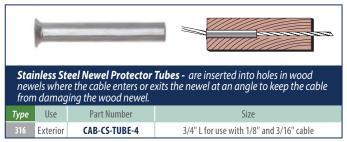


0					
Cable Grommets - Provides moisture barrier					
Cable diameter	Square newels with .125" wall Round newels with .156" wall				
1/8" or 3/16"	CAB-G-C6-3	CAB-G-C6-3			

In exterior applications, Cable Grommets can be useful by providing a moisture barrier to the inside of the stainless steel newels. The Grommets are made of black UV resistant Delrin[®] and are available for 1/8" or 3/16" cable diameters.

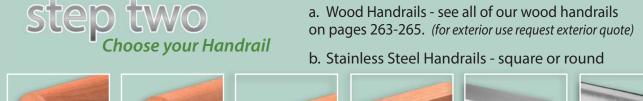










Stainless Steel <u>Square</u> Handrails - see pages 210 and 245 Stainless Steel <u>Round</u> Handrails - see page 225

Bottom Rails

Wood can be 6002 rail or other shapes as specified

Stainless Steel- square rail can be used as a bottom rail with square newels and 1.5" diameter rail can be used with 1.5" diameter newels

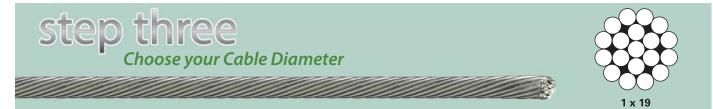

Cable diameters - also available 1/4", 5/16", 3/8"					
Diamotor	Distant Dest Miles		Bore- Swaged by Oak Pointe (No Grommets)		
Diameter Part Nbr	Part NDr	Swaged ^	Threaded Stud	Swaging Ferrule	
1/8"	CAB-125	5/32"	11/32"	17/64"	
3/16"	CAB-187	7/32"	15/32"	25/64"	

^NOTE: If Cable Grommets (see above) are used then Bore is 1/4"

3/16" diameter cable should be used where higher minimum breaking strength is required or where a larger diameter is aesthetically desired. See page 243.

Cable may be ordered cut to specific lengths or it can be ordered by the lineal foot and shipped on a spool. Cable is left hand lay, buffed and wiped giving a shiny surface.

Delrin® is a DuPont registered trademark.




step four choose your fittings

Fittings are for newels and posts in wood, wood with composite sleeves, stainless steel and other metals. Fittings to fasten to concrete are available- please contact our office for more information. Swageless fittings can only be used with 1x19 cable and are available for 1/8" and 3/16" diameters (specify when ordering).



STAINLESS STEEL

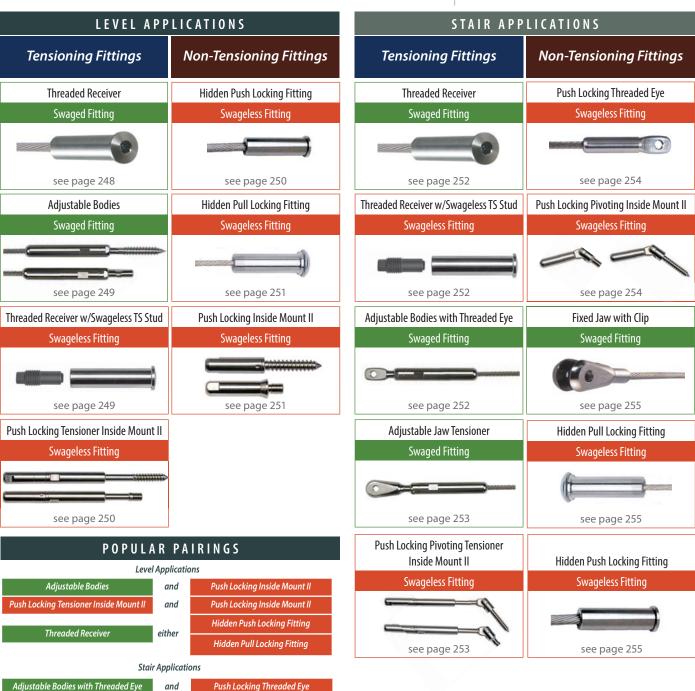

djustable Bodies with Threaded Eye	and
ish Locking Pivoting Tensioner Inside Mount	and
Threaded Receiver	and




Push Locking Pivoting Inside Mount II Hidden Pull Locking Fitting

Tensioning Fittings for Level Applications



STAINLESS STEEL

The Threaded Receiver is highly reliable and cost effective while being almost entirely concealed within the newel for a very aesthetically pleasing appearance. Drill the end newel posts and slide the receiver inside. The receiver is female-threaded to accept the male-threaded swaging stud (see below) that is attached to the cable. To tension the cable insert an Allen wrench into the head of the receiver and rotate the head around the male threads to draw



the stud and cable inside the receiver. To use the receiver the newels must be mounted no less than the distance in the chart below from the house or other barrier. Newels using inside mount fittings have no clearance restrictions.


Threaded Receiver

	Min Distance *				
CAB-R-6-12	1.67"				
CAB-R-6-32	2.14"				
CAB-R-6-62	3.67"				
Ainimum distance between newel					

* N and house or other barrier.

WOOD APPLICATIONS

- For use with wood the receiver may rest against the outside of the newel as shown or be counterbored. Order stainless steel washer 7/16 SAE & threaded swaging stud. CAB-7/16SAE washer






Wood cable system with Threaded Receiver (no visible fittings)

Threaded Receiver - for	3/16" HEX FOR ALLEN WRENCH					
Newel Types	Receiver Part Nbr	"A"	"T"	Boring Instructions		
Wood Square^ - min 3.5"	CAB-R-6-62	3.5625"	5/16-24	29/64" through		
1.5" Round Stainless	CAB-R-6-12	1.562"	5/16-24	29/64" both ends		
1.9" Round Stainless	CAB-R-6-32	2.030"	5/16-24	29/64" both ends		
2" Square Stainless	CAB-R-6-32	2.030"	5/16-24	29/64" both ends		
∧ requires CAB-7/16SAE washer						

		THREAD 1 .25		
Threaded Swaging Stud	for 1/8" Cable	for 3/16" Cable	Threading Size	
Required: order separately	CAB-S-4	CAB-S-6	5/16-24	

STAINLESS STEEL APPLICATIONS Receiver comes with a Delrin[®] (plastic) washer when used with stainless steel newels. Counterbore STUD round newels so head sits flush.



Also order threaded swaging stud.

POINTE



Swaged fitting but no field swaging necessary. Let Oak Pointe do your swaging & pair with swageless fitting on other end

outside of newel

CONS

at transitions (such as corners) to keep cable runs on the same plane on adjoining sides Distance to barriers


is restricted

Body of fitting is concealed within newel, no big bulky buttons on





The mounting end on our **Adjustable Bodies** tensioning fittings has a male thread that mates with the female thread within the body of the tensioner. The swaging ferrule (order separately) is swaged onto the cable and holds the cable inside the body. The body rotates on the cable and provides a considerable amount of take -up during tensioning with an open-end wrench. After tensioning, the lock nut locks the assembly in place.

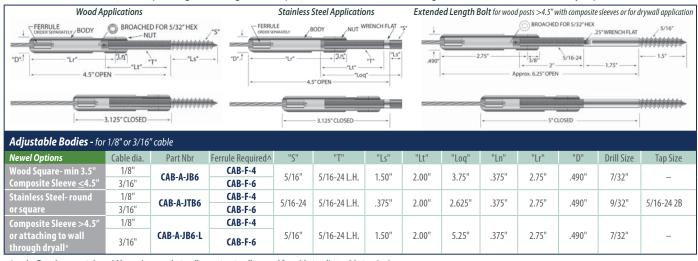

^ order Ferrule separately *Always be sure that walls are structurally sound for withstanding cable tensioning.

WOOD APPLICATIONS/ WOOD POSTS with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS -This tensioner screws into end post for wood newels (min. 3.5") or composite newels less than 4.5". Tensioners with extended length hanger bolts can penetrate composite sleeves on newels >4.5" to fasten to wood core or for penetrating drywall to fasten to structural wall behind.* End of hanger bolt is broached for 5/32" hex for ease of installation. Requires Ferrule - order separately. STAINLESS STEEL APPLICATIONS

STAINLESS STEEL

- This tensioner screws into a drilled and tapped hole in stainless steel newels. Requires Ferrule - order separately.

ALCHEV FOR ALL EN MIDENICL

equites retruie - order separately.


Threaded Receiver with Swageless TS Stud

316 Stainless Steel		-	
Swageless Fitting			
Tensioning	Swageless TS Stud	for 1/8"	for 3/16"
Level Application		Cable	Cable
Stair Application See Page 252	Required: order separately	CAB-TS-4	Call

The new **TS Stud** is a Swageless stud that works with the new R-4 series of Threaded Receivers. These receivers are externally the same size as the R-6 Series (same bore size) but accommodate the TS Stud. The TS Stud is not like other Swageless fittings- no jaws. Instead, it has a collet & set screw. Insert the cable into the stud and hand tighten the set screw. It holds the cable as well as the Threaded Swaging Stud on page 248.

WOOD APPLICATIONS

- For use with wood the Receiver may rest against the outside (shown) of the newel or be counterbored. Order stainless steel washer CAB-7/16SAE and Swageless TS Stud.



R-4 Threaded Receiver for use with Swageless TS Stud - for 1/8" or 3/16" cab					
Newel Types	Receiver Part Nbr	"A"	"T"	Boring Instructions	
Wood Square^ - min 3.5"	CAB-R-4-62	3.5625"	5/16-24	29/64" through	
1.5" Round Stainless	CAB-R-4-12	1.562"	5/16-24	29/64" both ends	
1.9" Round Stainless	CAB-R-4-32	2.030"	5/16-24	29/64" both ends	
2" Square Stainless	CAB-R-4-32	2.030"	5/16-24	29/64" both ends	

^ requires CAB-7/16SAE washer

Clearance restriction that apply to R-6 Threaded Receivers also apply to R-4. See page 258

STAINLESS STEEL APPLICATIONS - This fitting comes with a Delrin® (plastic) washer when used with stainless steel newels. Counterbore round newels so head sits flush. Also order Swageless TS Stud.




Push Locking Tensioner Inside Mount II

STAINLESS STEEL

316 Stainless Steel	
Swageless Fitting	
Tensioning	
Level Application	
Stair Application See Page 253	Cable Rele for 1/8" cable

Our **Push Locking Tensioner Inside Mount II** fitting should be used for level applications only. This fitting is comprised of Hanger Bolt or Threaded Bolt and Push Locking body which has the swageless wedges to grasp the cable. Tension is created by securing the post-side section of the body onto the machine treads while preventing the cable-side of the body from turning. The wrench flat at the back end of the fitting allows the hanger bolt version to be used with newels with composite sleeves or mounting through drywall.*

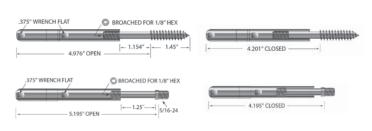

only

Push Locking Tensioner Inside Mount II - for 1/8" or 3/16" cable						
Newel Types	Cable dia.	Part Nbr	Drill Size	Tap Size		
Wood Square- min 3.5″	1/8"	CAB-PLT-LAG4	7/32"			
Composite Sleeve (all)	3/16"	CAB-PLT-LAG6	1/32	-		
Stainless Steel- round	1/8"	CAB-PLT-IMTH4	0 (22)	5/16-24		
or square	3/16"	CAB-PLT-IMTH6	9/32"	2B		
Attaching to wall	1/8"	CAB-PLT-LAG4	7/22			
through drywall*	3/16"	CAB-PLT-LAG6	7/32"	_		

WOOD APPLICATIONS/ WOOD POSTS with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS -This tensioner screws right into a Wood Newel End post, a Wood Post with Composite Sleeve or through Drywall to fasten to the structural wall behind.* End of hanger bolt is broached for 5/32" hex for ease of installation.



STAINLESS STEEL APPLICATIONS - This tensioner screws into a drilled and tapped hole in stainless steel newels. End of threaded bolt is broached for 5/32" hex for ease of installation.



*Always be sure that walls are structurally sound for withstanding cable tensioning.

Non-Tensioning Fittings for Level Applications

When you have shorter cable runs or runs that do not bend more than once, you do not need a tensioning fitting on both ends. Save money by using these less expensive fittings.

Hidden Push Locking Fitting

316 Stainless Steel
Swageless Fitting
Non-Tensioning
Level Application

Stair Application See Page 255

The Hidden Push Locking Fitting is a swageless non-tensioning option that can be used with any tensioning device. It has the same appearance as the Threaded Receiver and when paired with it they give you a cable rail system with no visible hardware between posts. Attach the tensioner to one end post and the Hidden Push Locking Fitting to the other end post, cut the cable to the proper length and push it into the locking fitting and then tension the cable. To use this fitting the newels must be mounted no less than the distance in the chart below from the house or other barrier. Newels using inside mount fittings have no clearance restrictions.

2	$\begin{array}{c} \downarrow \\ 537^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 432^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 432^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 537^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 432^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 132^{-} \\ 132^{-} \\ \downarrow \end{array} \qquad \begin{array}{c} \downarrow \\ 132^{-} \\ 132^{$				House	Min Distance* 1.67"	
	CAB-PL-4-12/ CAB-PL-6-12 CAB-PL-4-2.030/ CAB-PL-6-2.030				outside	CAB-PL-X-2.030	2.13"
	Hidden Push Locking Fitting - for 1/8" or 3/16" cable					* Minimum distance between newel and	
	Newel Types	Part	Part Nbr			house or other barrier.	
	newer types	for 1/8" Cable	for 3/16" Cable	Bore Size			
	Wood Square^- min 3.5"	CAB-PL-4-12	CAB-PL-6-12	29/64"			
6 Jan	1.5" Round Stainless Steel	CAB-PL-4-12	CAB-PL-6-12	29/64"		Cable Release for 1/8" cable only	
	1.9" Round Stainless Steel	CAB-PL-4-2.030	CAB-PL-6-2.030	29/64"	CAB-7/16SAE washer		
	2" Square Stainless Steel	CAB-PL-4-2.030	CAB-PL-6-2.030	29/64"	∧ requires CAB-7/16SAE washer	for the case only	
OOD APPLICATIONS		ອງກາກກາກ		ESS STEEL ΔΡΡΙ			

WOOD APPLICATIONS

- For use with wood the Hidden Push Locking Fitting may rest against the outside (shown) of the newel or be counterbored. Order stainless steel washer CAB-7/16SAE.



STAINLESS STEEL APPLICATIONS

- This fitting comes with a Delrin[®] (plastic) washer when used with stainless steel newels. Counterbore round newels so head sits flush.





Hidden Pull Locking Fitting

316 Stainless Steel
Swageless Fitting
Non-Tensioning
Level Application
Stair Application See Page 255



The Hidden Pull Locking Fitting is a swageless nontensioning option that can be used with any tensioning device. This fitting has a button head but when paired with the Threaded Receiver they give you a cable rail system

STAINLESS STEEL

with no visible hardware between posts. Attach the tensioner to one end post and the Hidden Pull Locking Fitting to the other end post. Pull the cable all the way through the Hidden Pull Locking Fitting, tension the cable, then cut the excess cable off with a 4" right angle grinder or one of our grinding wheels. Press on the stainless steel cap and you are finished! To use this fitting the newels must be mounted no less than the distance in the chart below from the house or other barrier. Newels using inside mount fittings have no clearance restrictions.

Pull!	Cut!	Ca		"L"Overall Length - with Cap "B" Body Length	$ \xrightarrow{432^{\circ}}_{1} \xrightarrow{537^{\circ}}_{1} $	House
Hidden Pull Locking Fitting	- for 1/8" or 3/16" cable	e				
Newel Types	Part Nbr		"B" Body	"L" Overall	Bore size	
	for 1/8" Cable	for 3/16" Cable	D Douy	Length	DUIC SIZC	
Wood Square- min 3.5" ^	CAB-PUL-4-12	CAB-PUL-6-12	1.562"	1.825"	29/64"	
1.5" Round Stainless Steel	CAB-PUL-4-12	CAB-PUL-6-12	1.562"	1.825"	29/64"	CAB-7/16SAE was
1.9" Round Stainless Steel	CAB-PUL-4-2.030	CAB-PUL-6-2.030	2.030"	2.266"	29/64"	
2" Square Stainless Steel	CAB-PUL-4-2.030	CAB-PUL-6-2.030	2.030"	2.266"	29/64"	∧ requires CAB-7/16SAE wa






Cable Release

washer

for 1/8" cable only

WOOD APPLICATIONS

- For use with wood the Hidden Pull Locking Fitting may rest against the outside (shown) of the newel or be counterbored. Order stainless steel washer CAB-7/16SAE.




STAINLESS STEEL APPLICATIONS - This fitting comes with a Delrin[®] (plastic) washer when used with stainless steel newels. Counterbore round newels so head sits flush.

Push Locking Inside Mount II

316 Stainless Steel					
Swageless Fitting					
Non-Tensioning					
Level Application					
Stair Application See Page 254					

432

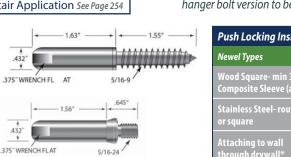


Push Locking Inside Mount II fittings are for level runs where the back side of the newel is not accessible or where the desired installation is for inside mount fittings. Use with any tensioning fittings. Attach the tensioning device to one end newel, cut the cable to the correct length, push the cable into the swageless fitting, tension the cable and you are finished! The wrench flat at the back end of the fitting allows the hanger bolt version to be used with newels with composite sleeves or mounting through drywall.*

Push Locking Inside Mount - for 1/8" or 3/16" cable							
Newel Types	Cable dia.	Part Nbr	Drill Size	Tap Size			
Wood Square- min 3.5″	1/8"	CAB-PL-LAG4	7/32"	-			
Composite Sleeve (all)	3/16"	CAB-PL-LAG6	//32				
Stainless Steel- round	1/8"	CAB-PL-IMTH4	9/32"	E/1C 24			
or square	3/16"	CAB-PL-IMTH6	9/32	5/16-24			
Attaching to wall	1/8"	CAB-PL-LAG4	7/22/	_			
through drywall*	3/16"	CAB-PL-LAG6	7/32"				

*Always be sure that walls are structurally sound for withstanding

WOOD APPLICATIONS/ WOOD POSTS with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS - This non-tensioning fitting screws right into a Wood Newel End post, a Wood Post with Composite Sleeve or through Drywall to fasten to the structural wall behind*.





cable tensioning.


STAINLESS STEEL APPLICATIONS - The Push Locking Inside Mount II threaded bolt fastens into a drilled and tapped hole in stainless steel newels.





316 Stainless Steel Swaged Fitting Tensioning Stair Application Level Application See Page 249

This **Adjustable Bodies** with Threaded Eye is a tensioning fitting. The mounting end has a male thread that mates with the female thread within the body of the tensioner. The swaging ferrule (order separately) is swaged onto the cable and holds the cable inside the body. The body rotates on the cable and provides a considerable amount of take -up during tensioning with an open-end wrench. After tensioning, the lock nut locks the assembly in place. NOTE: If you want your cable to be centered on your newel, then the Lag Eye or Threaded Tabs must be installed 1/4" off center. For a tension fitting that easily centers your cable, but costs more, see our Adjustable Jaw Tensioner fittings below on page 253.

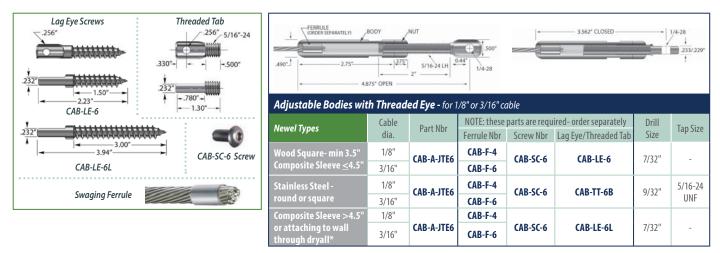

WOOD APPLICATIONS - The Lag Eye screws into a wood newel end post (minimum 3.5") and the fitting attaches to it. Requires ferrule, screw & lag eye - order all separately. STAINLESS STEEL APPLICATIONS -The threaded tab screws into a drilled and tapped hole in stainless steel newels and the fitting attaches to it. Requires ferrule, screw & threaded taborder all separately. WOOD POSTS (>4.5") with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS - Ordered with the extended length lag eye screw this tensioner can penetrate composite sleeves on newels greater than 4.5" to fasten to the wood core (smaller newels use standard lag eye) or for penetrating drywall to fasten to the structural wall behind.*

*Always be sure that walls are structurally sound for withstanding cable tensioning.



Adjustable Jaw Tensioner

316 Stainless Steel
Swaged Fitting
Tensioning

Stair Application

NOTE: For details on CAB-F-4, CAB-F-6, CAB-SC-6, CAB-LE-6, CAB-LE-6L, see page 252

Unlike many turnbuckles, our Adjustable Jaw Tensioner has no sharp edges, no crevices to collect dust or dirt, no unsightly nuts on the end, ugly swaged shanks or anything that will scratch or snag. The clevis end allows the lag eye or thread tab to be mounted centered on the newel which is not the case with threaded eye ends. The swaging ferrule is swaged onto the cable and holds the cable inside the body. The body rotates on the cable and provides considerable amount of take-up during tensioning with an open end wrench. After tensioning the lock nut locks the assembly in place. Use with our Fixed Jaw with Clip fitting. For a similar but less expensive option see our Adjustable Bodies with Threaded Eye on page 252.

Ferrule

Nbr

CAB-F-4

CAB-F-6

CAB-F-4

CAB-F-6

CAB-F-4

CAB-F-6

3/16"

RRULE RDER SEPERATELY) /BO	DY ,NUT		+.56" → 260 through	Adjustable Jaw Tensioner - for 1/8" or 3/16" cable						
2.75*	 + ³⁷⁵	5/16-25 LH	-260 1/4-28 THREAD	Newel Types	Cable dia.	Part Nbr	NOTE: t Ferru Nb			
	— OPEN —— 5-1/2" ——		through OTHER SIDE	Wood Square- min 3.5" Composite Sleeve ≤4.5"	1/8" 3/16"	CAB-A-J62	CAB- CAB-			
•	CLOSED 4-3/16*		1/4-28	Stainless Steel -	1/8"	CAB-A-J62	CAB-			
				round or square Composite Sleeve >4.5" or attaching to wall	3/16"	CAB-A-J62	CAB- CAB-			

WOOD APPLICATIONS - The Lag eye screws into a wood newel end post (minimum 3.5") and the fitting attaches to it. Requires ferrule, screw & lag eye -



STAINLESS STEEL APPLICATIONS - The threaded tab screws into a drilled and tapped hole in stainless steel newels and the fitting attaches to it. Requires ferrule, screw & threaded tab- order all separately.

oosite Sleeve >4.5' taching to wall

WOOD POSTS (>4.5") with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS - Ordered with the extended length lag eye screw this tensioner can penetrate composite sleeves on newels greater than 4.5" to fasten to the wood core (smaller newels use standard lag eye) or for penetrating drywall to fasten to the structural wall behind.*

NOTE: these parts are required- order separately

Screw Nbr

CAB-SC-6

CAB-SC-6

CAB-SC-6

Lag Eye/Threaded

Tab

CAB-LE-6

CAB-TT-6B

CAB-LE-6L

Drill

Size

7/32'

9/32"

7/32"

Тар

Size

5/16-24

UNF


STAINLESS STEEL

*Always be sure that walls are structurally sound for withstanding cable tensioning.


Push Locking Pivoting Tensioner Inside Mount II

316 Stainless Steel Swageless Fitting Tensioning Stair Application Level Application See Page 250

Our Push Locking Pivoting Tensioner Inside Mount II fitting is a great option for stair applications. It can be used with any fitting on the opposite end. This fitting consists of two pieces, the pivoting lag/bolt and swageless Push-Locking body. Install the lag or bolt into the newel using the hinged arm as a lever. Tension is accomplished by securing the post-side portion of the body onto the machine threads while keeping the cable side segment of the body from turning. Use the .375" wrench flats and always use cable tensioning pliers when griping the cable.

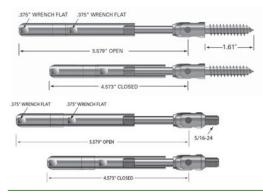

WOOD APPLICATIONS - This pivoting tensioner screws into a wood end post (minimum 3.5") or wood newel with composite sleeve min. 3.5" x 3.5" 4" or less and is all you need for the tensioning end of a stair run.

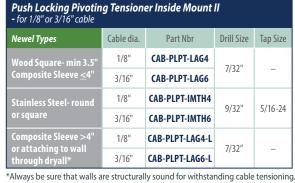

STAINLESS STEEL APPLICATIONS - This pivoting tensioner screws into a drilled and tapped hole in round or square stainless steel newels and is all you need for the tensioning end of a stair run.


WOOD POSTS (>4") with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS - Ordered with the extended length lag screw this tensioner can penetrate composite sleeves on newels greater than 4" to fasten to the wood core (smaller newels use standard lag screw) or for penetrating drywall to fasten to the structural wall behind *

Non-Tensioning Fittings for Stair Applications


Push Locking Threaded Eye


STAINLESS STEEL


316 Stainless Steel	
Swageless Fitting	
Non-Tensioning	
Stair Application	
Level Application See Page 251	



WOOD APPLICATIONS - The Lag eye screws into a wood newel end post (minimum 3.5") and the fitting attaches to it. Requires










Push Locking Threaded Eye - for 1/8" or 3/16" cable								
Newel Types	Cable	Part Nbr	NOTE: these parts are re	Drill	Tap Size			
Newer Types	dia.	Part NDI	Screw Nbr	Lag eye/tab	Size			
Wood Square- min 3.5"	1/8"	CAB-PL-TE-4	CAB-SC-6	CAB-LE-6	9/32"			
Composite Sleeve \leq 4.5"	3/16"	CAB-PL-TE-6	CAD-3C-0	CAD-LE-0	9/32	_		
Stainless Steel -	1/8"	CAB-PL-TE-4	CAB-SC-6	CAB-TT-6B	9/32"	5/16-24		
round or square	3/16"	CAB-PL-TE-6	CAD-3C-0	CAD-11-0D		2B		
Composite Sleeve >4.5"	1/8"	CAB-PL-TE-4						
or attaching to wall through dryall*	3/16"	CAB-PL-TE-6	CAB-SC-6	CAB-LE-6L	7/32"	-		

STAINLESS STEEL APPLICATIONS - The threaded tab screws into a drilled and tapped hole in stainless steel newels and the fitting attaches to it. Requires screw & threaded tab- order both separately.

WOOD POSTS (>4.5") with COMPOSITE SLEEVES or FASTENING THROUGH DRYWALL APPLICATIONS - Ordered with the extended length lag eye screw this tensioner can penetrate composite sleeves on newels greater than 4.5" to fasten to the wood core (smaller newels use standard lag eye) or for penetrating drywall to fasten to the structural wall behind.*

*Always be sure that walls are structurally sound for withstanding cable tensioning.



Push Locking Pivoting Inside Mount II fittings are an easy to use and install non-tension swageless fitting for stair applications. Install the lag or bolt into the newel using the hinged arm as a lever.

Push Locking Pivoting	Inside Mou	int II - for 1/8" or 3,	/16" cable	
Newel Types	Cable dia.	Part Nbr	Drill Size	Tap Size
Wood Square- min 3.5"	1/8"	CAB-PLP-LAG4	7/22	
Composite Sleeve ≤4"	3/16"	CAB-PLP-LAG6	7/32"	_
Stainless Steel- round	1/8"	CAB-PLP-IMTH4	0/22/1	-
or square	3/16"	CAB-PLP-IMTH6	9/32"	5/16-24
Composite Sleeve >4" or attaching to wall	1/8"	CAB-PLP-LAG4-L	7/32″	
through dryall*	3/16"	CAB-PLP-LAG6-L	1/32	_

WOOD APPLICATIONS - This pivoting fitting screws into a wood end post (minimum 3.5") or wood newel with composite sleeve 4" or less and is all you need for the non-tensioning end of a stair run. Newels with composite sleeves greater than 4" or attaching to wall through drywall, use extended length lag.





STAINLESS STEEL APPLICATIONS - This pivoting fitting screws into a drilled and tapped hole in round or square stainless steel newels and is all you need for the non-tensioning end of a stair run.







Fixed Jaw with Clip

316 Stainless Steel

Swaged Fitting

Non-Tensioning

Stair Application




The **Fixed Jaw with Clip** has a clevis end so it is paired with our **Adjustable** Jaw Tensioner fitting. The clevis end allows the lag eye or threaded tab to be

mounted centered on the newel which is not the case with fittings that have threaded eye ends. The clip allows cable to be swaged by Oak Pointe before arriving at the job. Slide the cable with the attached ferrule through the Fixed Jaw with Clip and apply the clip (comes with part) with a pair "F" DIA THIS WALL ONLY of pliers, then pull the cable back into the fitting. Holes on intermediate FERRULE posts need larger through holes to allow the cable with the ferrule 260

attached to pass through.


.4" 1/4-28-28 THREAD THIS WALL ONLY

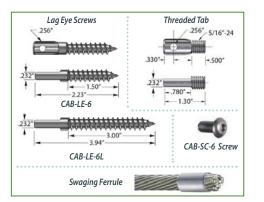

Hidden Pull Locking Fitting

316 Stainless Steel
Swageless Fitting
Non-Tensioning
Stair Application
Level Application See Page 251



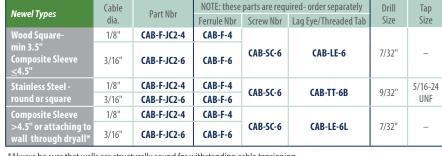

*Always be sure that walls are structurally sound for withstanding cable tensioning.

Fixed Jaw with Clip- for 1/8" or 3/16" cable

The **Hidden Pull Locking Fitting** can be used on stairs and applications with a pitch while boring the newel horizontally! No more beveled washers! For use with wood newels use the Stainless Steel Newel Protector Tubes (CAB-CS-TUBE-4 on page 246) where the cable exits at an angle to protect the newel. For use with metal newels it is recommended that the fitting length be the same as the width/diameter of your newel. See ordering information on page 251.



Hidden Push Locking Fitting

316 Stainless Steel
Swageless Fitting
Non-Tensioning
Stair Application

Level Application See Page 250




CAB-7/16SAE washer BEVELED







The **Hidden Push Locking** non-tensioning swageless fittings may be used on stairs or severe pitches with square newels and our stainless steel beveled washers. Not available for round newels. With stainless steel newels use the Delrin[®] washer (comes with part when ordered for stainless steel newel) between the beveled washer & the newel. With wood newels you have the option of using the beveled washer or just boring the hole on an angle and countersinking the receiver head. Either way use the CAB-7/16SAE washer (order separately) against the wood newel. See ordering information on page 250.



Hidden Push Locking Fitting Shown in a minimum 3.5" x 3.5" flat sided wood newel with beveled washer and CAB-7/316SAE washer.

Stainless Steel Beveled Washer ^ - for angled applications with flat-sided metal & wood posts					
Part Nbr	For pitch of				
CAB-BW32-6	30°-33°				
CAB-BW35-6	34°-36°				
CAB-BW38-6	37°-39°				
^Order separately					



Hidden Push Lockina Fittina Shown in flat sided stainless steel newel with beveled washer.



step five

STAINLESS STEEL

Order Tools and Accessories

Cable Cutters	Cable Gripping Pliers	Cut-off Tool	Cable Tension Gauge	Pre-Tensioner & Pliers	Cable Release	Grommet Tool Set
Contraction of the second s	All and a second	O.				11/1
CAB-CUTTER7	CAB-PLIERS	CAB-CUTWHEEL	CAB-PT-CR	CAB-PT-250	CAB-PL-KEY	CAB-GTS
For light duty use to cut 1/8" diameter cables	Locking pliers with machined jaws to grip	Used to cut cable flush with the end of Hidden	Check the tension on your cables with this easy to	The Pre-tensioner is useful when installing longer runs	Releases cable from Hidden Pull Locking &	To properly install grommets use these
CAB-CUTTER9	the cable as you tension it and prevents the cable	Pull Locking Fittings and to cut excess threads off	use gauge for cables up to 1/4" diameter.	of cable. It allows the cable to be tensioned through	Push Locking type fittings prior to cable tensioning.	tools. Place grommet on tool, align grommet over
To cut cable up to 1/4" diameter	, from turning and being damaged. You must	stud-type tensioners. Comes with mandrel & 2		the last intermediate newel, making it easier to connect	1/8" cable only.	hole and tap lightly with hammer.
CAB-CUTTER12	hold the cable when tensioning.	cut-off wheels.		to the end newel.		
For heavy duty use and	tensioning.			Locking Pliers required- order by cable size.		
to cut cables up to 3/8" diameter				CAB-VGJ-PT4C for 1/8" cable		
				CAB-VGJ-PT6C for 3/16" cable		

Drilling Template



Drill straight holes in wood newels with this steel drilling template. Clamp the guide to the newel and drill pilot holes then switch sides and drill again. Comes with 6" long drill bit to complete your cable through-holes. Made to a specific cable diameter & spacing.

CAB-DRILL TEMP

These accessories are a must for every job!



Swaging Tools Purchase or Rent Tools for swaging may be rented or purchased. For infrequent or one-time jobs the rental option is ideal. The rental kit includes Swager CAB-610, Air Pump CAB-PUMPAIR, Tool Box CAB-TB1, Cable Cutters CAB-CUTTER9, Cable Gripping Plier CAB-PLIERS. Contact us for all available Swaging equipment.









STAINLESS STEEL CCESSORIES

Adhesives



Stainless Steel Care & Maintenance Products

Working with Oak Pointe products means that you have the best guality stainless steel. Although Stainless Steel is very strong, even the best guality stainless steel is not 100% corrosion resistant. For this reason we recommend that you clean all stainless steel products with Q-Ultra-Clean immediately after delivery and then repeat the treatment after installation. This will ensure that any harmful residue has been removed. Use Q-Ultra-Clean on a regular basis to maintain the original beauty of your stainless steel components. The frequency will depend upon your environment, including interior or exterior use.

NOTE:

- · Follow all safety directions shown on the product labels.
- Never use steel wool or similar products for cleaning or polishing Stainless Steel. Steel wool will scratch the steel and these scratches will form the basis for rust.
- · Avoid using cleaning or polishing sponges, polishing powder, or other similar products. These can contain abrasives that will scratch the steel.
- For best results, cleaning and polishing should always be done in the direction in which the steel is brushed.



stainless steel's protective passive layer

Part Number

19.0610.000.00 16.9 fl. oz

Size

Туре

Use

ΔII



Q



Scotch[®]-**Brite** - polishing pads to remove scratches. Always polish in the direction of the grain. Туре Use Part Number Size Clea ΔII 19.0640.000.00 6" X 9'





SCREWS & FASTENERS

MODERN METAL COLLECTI

Wa	ood Scre	w-Philli	ps Head		04	Caracter Contracter Co	è		Q
Atta	ach bracket	ts & rosette	es to wall.	Use ancho	rs where r	equired (n	ot supplied	l).	
Tuno	lleo	Part	Hex		Dimei	nsions		Drill	Тар
Туре	Use	Number	Head	d	D	Н	L	Size	Size
316	Exterior	QS-6	-	-	-	-	1"	-	-

			Annu -						
Со	mbinat	ion Of L	ag & Ma	ichine S	crew Fa	stener			Q
Atta	ich bracke	ts to wall.	Use ancho	ors where r	equired (n	ot supplied	l).		
Turne	llaa	Part	Hex		Dimei	nsions		Drill	Тар
Туре	Use	Number	Head	d	D	Н	L	Size	Size
316	Exterior	QS-86	4mm	M8 x 1-1/4"	-	-	3-1/2"	-	-





14/-					0.133**	(ju	1*		<u>↓</u>).190" ↓
		e w-Phill i newel brac	-						
Turne	Part		Hex	Hex Dimensions					Тар
Туре	Use	Number	Head	d	D	Н	L	Size	Size
316	Exterior	WS-111	-	-	-	-	1"	-	-

Screws

Hexagon Socket Countersunk Head Cap Screw Q									
Replacement screws for glass clamp models 20, 21, 22, 25, 28 & 42.									
Туре	Use	Part	Hex		Dimensions				Тар
туре	036	Number	Head	d	D	Н	L	Size	Size
316	Exterior	QS-41	4mm	M6	1/2″	-	5/8″	-	-
Rep	lacement	crews for g	glass clam	p models 2	24.				
316	Exterior	QS-42	4mm	M6	1/2"	-	3/4"	-	-



	Can					and the second s		The a		
Socket Head Cap Screw								Q		
Type 18-8. Attach stainless steel parts to SS parts.										
Туре	Use	Part Number	Hex Head	d	Dimei D	nsions H	L	Drill Size	Tap Size	
304	Interior	QS-123	6mm	1/4"	1/2"	1/4"	3/4"	7/32"	1/4-20 3A	
Atta	ch stainle:	ss steel par	ts to SS pa	rts. Attac	h to wood a	also use ins	sert INS-12	20.*		
316	Exterior	QS-127	6mm	5/16"	15/32"	5/16"	3/4"	J	5/16-18 3A	
Тур	e 18-8. At	tach stainl	ess steel p	arts to SS (oarts. Atta	ch to wood	d also use i	nsert IN	S-171.*	
316	Exterior	QS-171	6mm	1/4"	1/2"	1/4"	2-1/4"	7/32"	1/4-20 3A	
Foru	use with Q	S-55.								
316	Exterior	QS-27	-	M8	-	-	3/4″	-	-	



*Wood Insert Chart (INS)


	-	Hex	Drive	$d_3 d_2$					
Hex Drive Threaded Wood Insert									
Use with QS-120, QS-122, QS-127									
Part Number	Hex		Drill						
Part Nulliper	Head Size	d2	d3	L	Size				
INS-120	8	0.552"	0.453"	0.591"	15/32" to 1/2"				
Use with QS-171									
INS-171	6	0.472"	0.374"	0.472"	3/8" to 25/64"				




SCREWS & FASTENERS

ODERN METAL COLLECTIO

Concrete Fastener Q									
Install vertically or horizontally, minimum 2.89" from edge to center of bore.									
Туре	Use	Part Number	Ф	Length	Drill Size				
Steel zinc plated	Interior	QS-36	M8	4-59/64"	1/2"				
Install vertically or horizontally, minimum 3.48" from edge to center of bore.									
316	Exterior	QS-519	M8	4-59/64"	1/2"				




Concrete Fastener Q									
Install (using Q-90	adhesive.							
Туре	Use	Part Number	d	Length	Drill Size				
Steel zinc plated	Interior	QS-246	M8	2-61/64"	5/16"				
316	Exterior	QS-247	M8	2-61/64"	5/16"				



3								
		1						
Conc	rete Fast	ener			Q			
Install	using Q-90	adhesive.						
Туре	Use	Part Number	Ф	Length	Drill Size			
	x Heads							
Steel zinc plated	Interior	QS-229	M10	3-11/32"	1/2"			
M12 He Steel zinc	x Heads							
plated	Interior	QS-232	M12	4-23/32"	1/2"			
316 Steel zinc	Exterior	QS-233	M12	4-23/32"	1/2"			
plated	Interior	QS-238	M12	6-11/16"	1/2"			
316	Exterior	QS-239	M12	6-11/16"	1/2"			
316	Exterior	QS-549	M12	5-5/16"	1/2"			
$\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \end{array} \\ \begin{array}{c} \end{array} \\ \end{array} $								
				-	<u>}</u> *			
Conc	rete Fast	ener - W	/ith threa	ded receive	er Q			
Install	using Q-90	adhesive.						
Туре	Use	Part Number	d	Length	Drill Size			
316	Exterior	QS-243	M10	3-5/16"	9/16"			
1		90°	5		 <!--</th-->			

Fasteners



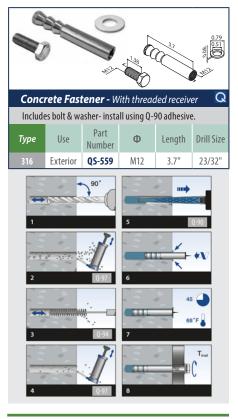

Fasteners Accessories



STAIR PARTS AND MORE

Wide Selection...



Products included in installation above:

Arts & Crafts Series (see pages 132-135)

Oak Pointe has the finest selection of stair parts including our Diamond, Classic and European Collections.



Products included in installation above:Avenue i Series (see pages 60-61)



Products included in installation above:





Products included in installation above:
Federal Series (see pages 80-83)





STAIR COMPONENTS COLLECTION

HANDRAILS • FITTINGS • TREADS • HARDWARE

Oak Pointe offers the largest selection of handrails with matching fittings in the industry. A stair craftsman relies on rail fittings to facilitate the beautiful continuous flow of your handrail in an over-the-post system. Fittings are available plowed with fillet or unplowed. Wrap up your exquisite stair order with standard or thick treads, stringer brackets, hardware, and more.

Handrails, Fittings, Treads and Hardware All components in this collection are for interior use only. Custom components are an integral part of our business. Call for pricing on your designs for interior and exterior use.









Photo by David W. McKee, RA

Rail Construction & Lengths Straight & Bending Rails available up to 24' long

Rail has glued plies for thickness but there are many ways to obtain the lengths needed.

This is Oak Pointe's standard construction for bending and straight rails. ALL solid plies, NO fingerjoints (FJ). 15'6" and longer is considered a 16' piece. Over 16' there will be one FJ per ply. At times we have to modify this with certain species due to the lack of availability of lengths needed. We will notify you if this becomes necessary, for example Alder over 10' long.

With 1 Joint construction 8' - 12' lengths (Alder 8' – 10') have solid top plies (No FJ), 14' – 16' top ply has 1 FJ and lower plies on all lengths have 1 FJ.

Solid Cap (SC): With Solid Cap construction lower plies have FJ sections, top cap is solid (No FJ) in 12' and under lengths (Alder 10' and under) and it usually will have one FJ in longer lengths.

Fingerjoint (FJ): Most often the standard of other stair companies. ALL plies have fingeriointed sections. In an effort to provide you with the most aesthetically pleasing construction, Oak Pointe no longer offers FJ rail as a standard product. We will quote your requirements on FJ rail.



For Quote please provide: 1. Stair plan view (sketch, architectural drawings or photo)

Wreathed rail

components for the rake

- 2. Rail profile
- 3. Wood species
- 4. Lineal footage
 - that rail covers


Additional Services available upon request

- 1. Rail system design and baluster layout
- 2. 3D model of parts prior to production Upon receipt of your order you will need to field measure and verify certain dimensions

Curved Rails - Level Applications

If you do not know the radius or are unsure about how to find it, you can calculate the radius using this formula:

W is the width at the base of the arc



Curved rail for level application

To receive a quote:


1. Radius

- a.) When your curve is a continuous radius please provide radius to centerline of rail or width and height of arc (see to the right).
- b.) If you don't have a continuous radius, please send sketch of approximate width and height of arc. Will need template with order.

Centerline of Rail


2. Length of rail needed, allow extra for attaching to other components.

3. Do you want end(s) straight and if yes, how long?

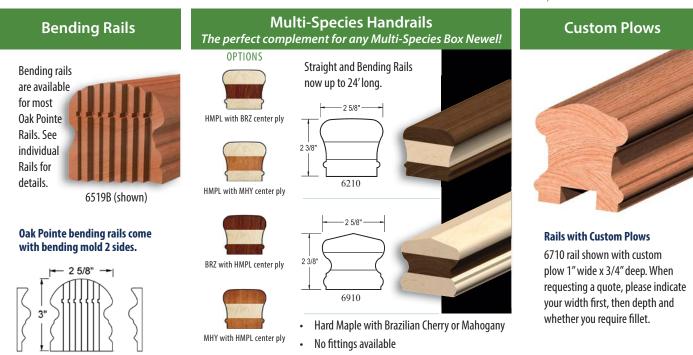



is the radius to the centerline of the rail




H is the height measured at the midpoint of the arc's base to centerline of rail

MADE IN THE USA $\star\star\star$

HANDRAILS


STAIR COMPONENTS

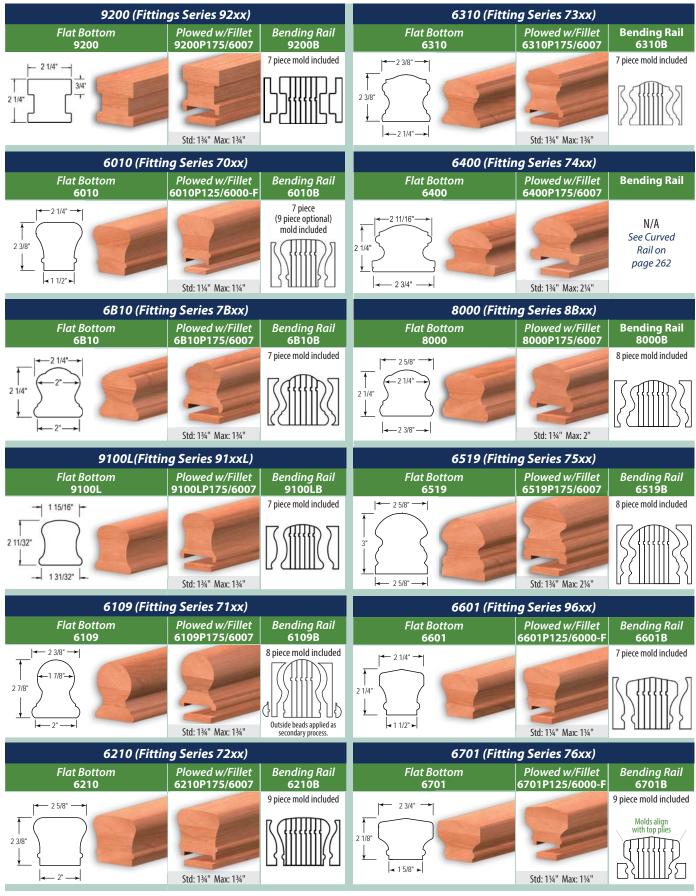

Plowed rail & shoe rail have fillet installed as shown. Fillet to be 80% or more of the rail or shoe length.



HANDRAILS

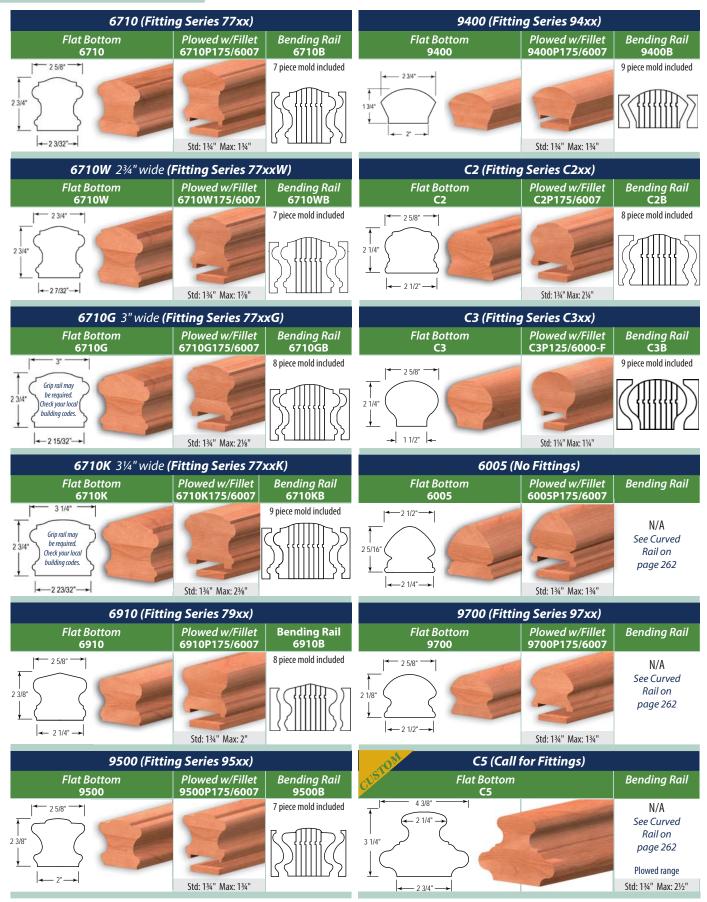


Plowed rail & shoe rail have fillet installed as shown. Fillet to be 80% or more of the rail or shoe length.



264

740.498.9820


HANDRAILS

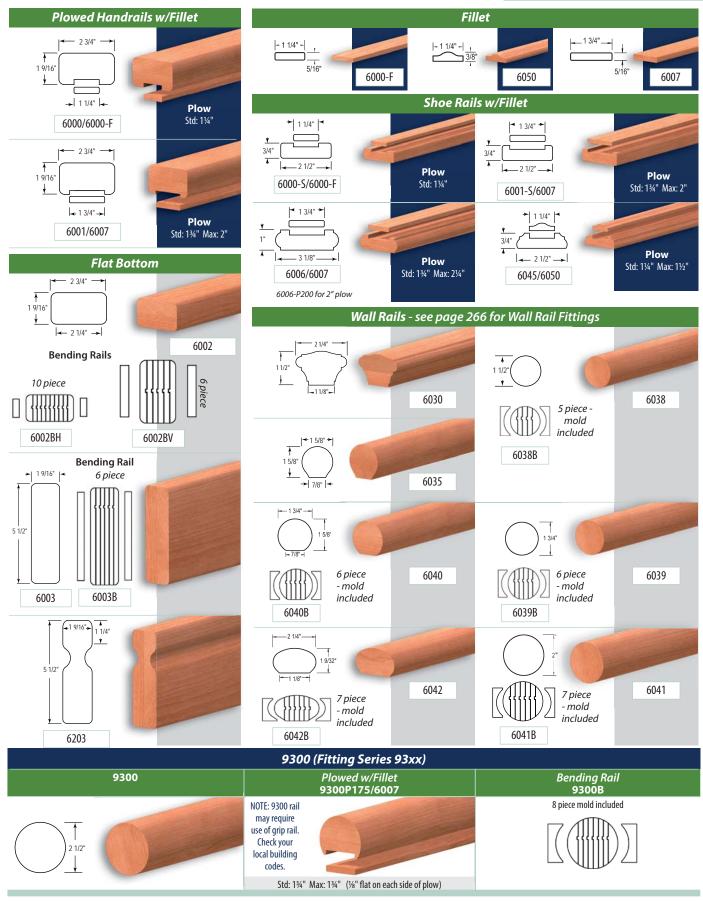

Plowed rail & shoe rail have fillet installed as shown. Fillet to be 80% or more of the rail or shoe length.



7840 Turnout for 6042

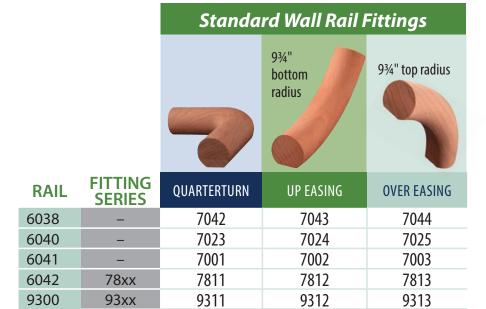

See complete line of fittings pages 267-273

RAIL FITTINGS

STAIR COMPONENTS

Many new fittings & fitting options. Some examples include:

7888 Gooseneck for 6042

Standard fittings for our 6042 rail. (78xx Series)

7821 Quarterturn with cap for 6042


and 3 size round caps. (See page 267)

Fittings with Square caps, Octagon caps



Stainless Steel fittings for 6039 1³/₄" full round rail. (See pages 197)





OINTE



Cap Examples



CAPS Choose from our standard shapes and sizes (shown below) or specify your requirements to complement your newels

RAIL FITTINGS


STAIR COMPONENTS




		Round Standard Cap	Round Large Cap	Round Extra Lg Cap	Octagon Large Cap	Square Large Cap
Handrail Series	Handrail and Rail Fittings Configuration	Standard	Add prefix -LC	Add prefix -XLC	Add prefix -OLC	Add prefix -SLC
	, , , , , , , , , , , , , , , , , , ,	Bottom Diameter	Bottom Diameter	Bottom Diameter	Bottom Flat to Flat	Bottom Square
	7B10, 7B19, 7B20, 7B21, 7B21-135 & goosenecks*	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
6B10 Series	7B91/92/93/94	3 1/4"	-	-	-	-
	7010, 7019, 7020, 7021, 7021-135 & goosenecks*	2 3/4"	3 3/8"	6"	3 3/8"	4"
6010 Series	7091/92/93/94	2 3/4"	-	-	-	-
	7810, 7819, 7820, 7821, 7821-135 & goosenecks*	2 3/8"	3"	5 5/8"	3"	3 5/8"
6042 Series	7891/92/93/94	2 3/8"	-	-	-	-
(100.5.)	7110, 7119, 7120, 7121, 7121-135 & goosenecks*	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
6109 Series	7191/92/93/94	3 1/4"	-	-	-	-
(240.5.)	7210, 7219, 7220, 7221, 7221-135 & goosenecks*	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
6210 Series	7291/92/93/94	3 1/4"	-	-	-	-
(210 C	7310, 7319, 7320, 7321, 7321-135 & goosenecks*	3 1/2"	4 1/8"	6 3/4"	4 1/8"	4 3/4"
6310 Series	7391/92/93/94	3 1/2"	-	-	-	-
(100 5 . 1.)	7410, 7419, 7420, 7421, 7421-135 & goosenecks*	4"	4 5/8"	7 1/4"	4 5/8"	5 1/4"
6400 Series	7491/92/93/94	4"	-	-	-	-
([10] Carrier	7510, 7519, 7520, 7521, 7521-135 & goosenecks*	3 7/8"	4 1/2"	7 1/8"	4 1/2"	5 1/8"
6519 Series	7591/92/93/94	3 7/8"	-	-	-	-
((01 Carias	9610, 9619, 9620, 9621, 9621-135 & goosenecks*	2 3/4"	3 3/8"	6"	3 3/8"	4"
6601 Series	9691/92/93/94	2 3/4"	-	-	-	-
(701 Carles	7610, 7619, 7620, 7621, 7621-135 & goosenecks*	2 7/8"	3 1/2"	6 1/8"	3 1/2"	4 1/8"
6701 Series	7691/92/93/94	2 7/8"	-	-	-	-
(710 Carles	7710, 7719, 7720, 7721, 7721-135 & goosenecks*	3 3/8"	4"	6 5/8"	4"	4 5/8"
6710 Series	7791/92/93/94	3 3/8"	-	-	-	-
(710) (Carias (73/!!)	7710W, 7719W, 7720W, 7721W, 7721W-135 & goosenecks*	3 1/2"	4 1/8"	6 3/4"	4 1/8"	4 3/4"
6710W Series (2¾")	7791W/92W/93W/94W	3 1/2"	-	-	-	-
6710G Series (3")	7710G, 7719G, 7720G, 7721G, 7721G-135 & goosenecks*	3 3/4"	4 3/8"	7"	4 3/8"	5"
67 IUG Series (3-)	7791G/92G/93G/94G	3 3/4"	-	-	-	-
6710KSeries (3¼")	7710K, 7719K, 7720K, 7721K, 7721K-135 & goosenecks*	4"	4 5/8"	7 1/4"	4 5/8"	5 1/4"
07 10KSelles (5%)	7791K/92K/93K/94K	4"	-	-	-	-
6910 Series	7910, 7919, 7920, 7921, 7921-135 & goosenecks*	3 1/2"	4 1/8"	6 3/4"	4 1/8"	4 3/4"
0910 Selles	7991/92/93/94	3 1/2"	-	-	-	-
8000 Series	8B10, 8B19, 8B20, 8B21, 8B21-135 & goosenecks*	3 5/8"	4 1/4"	6 7/8"	4 1/4"	4 7/8"
ouon selles	8B91/92/93/94	3 5/8"	-	-	-	-
9100L Series	9119L, 9120L, 9121L, 9121-135L & related goosenecks	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
9100L Jelles	9191L/92L/93L/94L	3 1/4"	-	-	-	-
9200 Series	9219, 9220, 9221, 9221-135 & related goosenecks	3 1/2"	4 1/8"	6 3/4"	4 1/8"	4 3/4"
9200 Series	9291/92/93/94	3 1/2"	-	-	-	-
9300 Series	9310, 9319, 9320, 9321, 9321-135 & goosenecks*	-	2 9/16" **	5 3/16" **	2 9/16" **	3" **
0.400 C . 1	9419, 9420, 9421, 9421-135 & related goosenecks	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
9400 Series	9491/92/93/94	3 1/4"	-	-	-	-
0500.5	9510, 9519, 9520, 9521, 9521-135 & goosenecks*	3 1/4"	3 7/8"	6 1/2"	3 7/8"	4 1/2"
9500 Series	9591/92/93/94	3 1/4"	-	-	-	-
0700.0	9710, 9719, 9720, 9721, 9721-135 & goosenecks*	3 3/4"	4 3/8"	7"	4 3/8"	5"
9700 Series	9791/92/93/94	3 3/4"	-	-	-	-
(2)(C210, C219, C220, C221, C221-135 & goosenecks*	3 3/4"	4 3/8"	7"	4 3/8"	5"
C2 Series	C291/92/93/94	3 3/4"	-	-	-	-
(2.6.1.)	C310, C319, C320, C321, C321-135 & goosenecks*	2 3/4"	3 3/8"	6"	3 3/8"	4"
C3 Series	C391/92/93/94	2 3/4"	-	-	-	-
<i>cr.c.</i> , <i>c.</i> ,	C510, C519, C520, C521, C521-135 & goosenecks*	4"	4 5/8"	7 1/4"	4 5/8"	5 1/4"
C5 Series Custom	C591/92/93/94	4"	-	-	-	-

*Related Goosenecks: xx60, xx60-135, xx65, xx65-135, xx81, xx81-135, xx86, xx86-135, xx88, xx97 ** Maximum newel top (9300 Series)




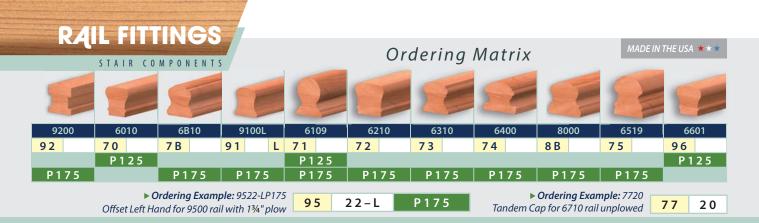

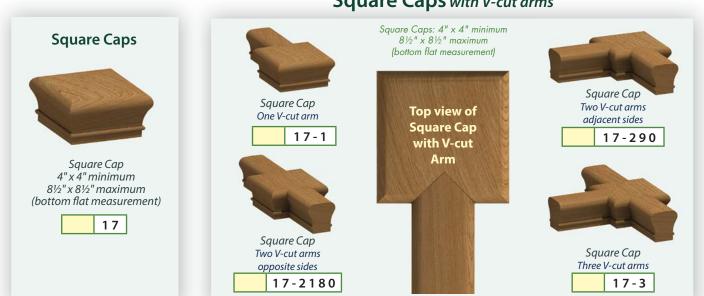

Square Caps with V-cut arms


Vertical Volutes (not available plowed) Available for all Standard rail profiles, custom profiles and your unique novelty designs

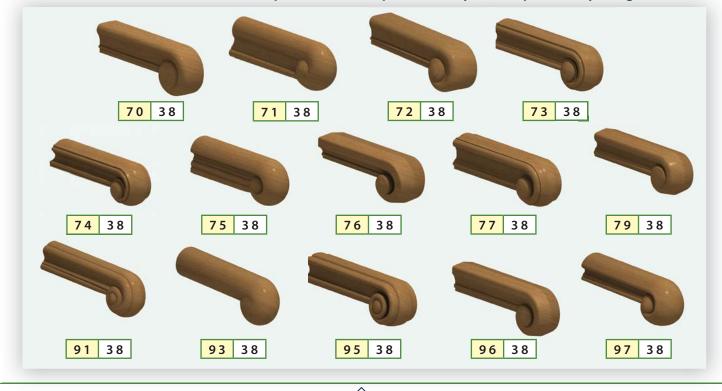








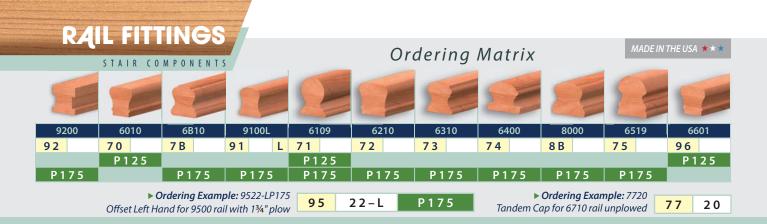


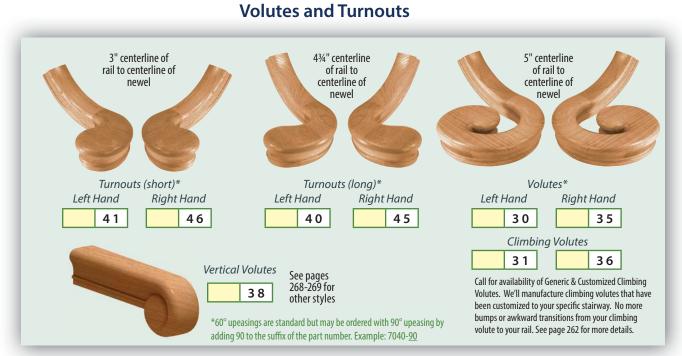


Volute and Turnout Chart to determine maximum recommended top of Newel width

6B10 Series		6519 Series		6910 Series		9700 Series	
7B30/35	21/8"	7530/35	31⁄2"	7930/35	31⁄8"	9730/35	33⁄8"
7B40/45, 7B41/46	21/8"	7540/45, 7541/46	31⁄2"	7940/45, 7941/46	31⁄8"	9740/45, 9741/46	33⁄8"
6010 Series		6601 Series		8000 Series		C2 Series	
7030/35	2 ¹⁵ ⁄16"	9630/35	215/16"	8B30/35	31⁄4"	C230/35	33⁄8"
7040/45, 7041/46	23⁄8"	9640/45, 9641/46	23⁄8"	8B40/45, 8B41/46	31⁄4"	C240/45, C241/46	33⁄8"
6042 Series		6701 Series		9100L Series		C3 Series	
7830/35	Custom	7630/35	21⁄2"	9130L/35L	215/16"	C330/35	23⁄8"
7840/45, 7841/46	2"	7640/45, 7641/46	21⁄2"	9140L/45L, 9141L/46L	215/16"	C340/45, C341/46	23⁄8"
6109 Series		6710 Series		9200 Series		C5 Series Custom	
7130/35	21/8"	7730/35	3"	9230/35	31⁄8"	C530/35	35⁄8"
7140/45, 7141/46	21/8"	7740/45, 7741/46	3"	9240/45, 9241/46	31⁄8"	C540/45, C541/46	35⁄8"
6210 Series		6710W (2-3/4) Series		9300 Series			
7230/35	215/16"	7730W/35W	31⁄8"	9330/35	Custom		
7240/45, 7241/46	215/16"	7740W/45W, 7741W/46W	31⁄8"	9340/45, 9341/46	Custom		
6310 Series		6710G (3) Series		9400 Series			
7330/35	31⁄8"	7730G/35G	3¾"	9430/35	215/16"		
7340/45, 7341/46	31⁄8"	7740G/45G, 7741G/46G	33⁄8"	9440/45, 9441/46	215/16"		
6400 Series		6710K (3-1/4) Series	·	9500 Series			
7430/35	35⁄8"	7730K/35K	35⁄8"	9530/35	21/8"		
7440/45, 7441/46	35⁄8"	7740K/45K, 7741K/46K	35⁄8"	9540/45, 9541/46	21/8"		



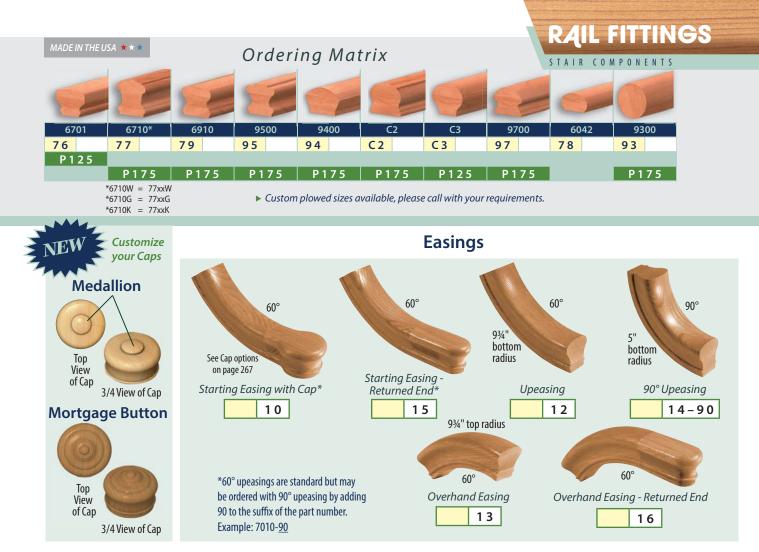

Level Fittings - for Fittings with Caps, see Cap options on page 267

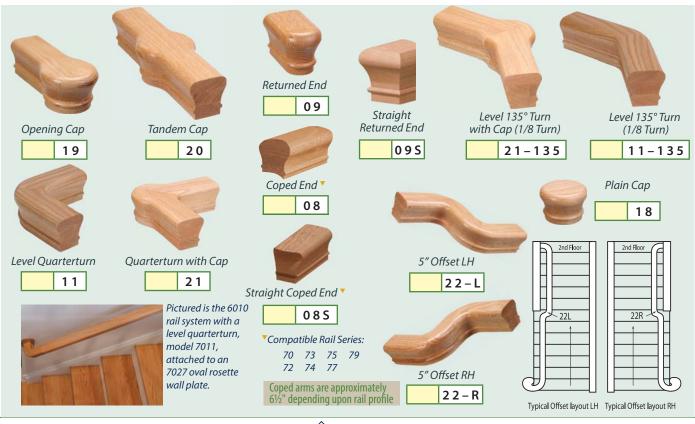


P.A	IL FITT	INGS								
	State of the second	MPONENT		Ordering Matrix MADE IN THE USA ***						
				2-		E	-			
9200	6010	6B10	9100L	6109	6210	6310	6400	8000	6519	6601
92	70	7 B	91 L	71	72	73	74	8 B	75	96
	P125			P125						P125
P175		P175	P175	P175	P175	P175	P175	P175	P175	
			ple: 9522-LP175 il with 1¾" plow		22-L	P175		Ordering Exar ap for 6710 rail		77 20




All Oak Pointe Goosenecks come with a loose upeasing and may be used for 1 or 2 rise applications, for 3 or 4 rise applications please call for quote.

Quarterturn Gooseneck (Up)

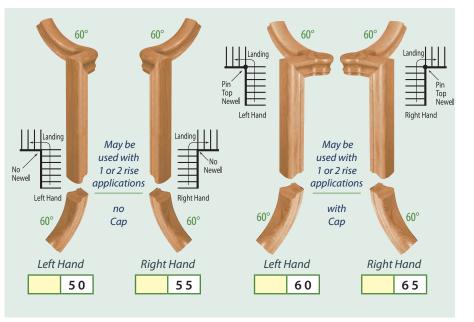

180° Gooseneck (Flat)

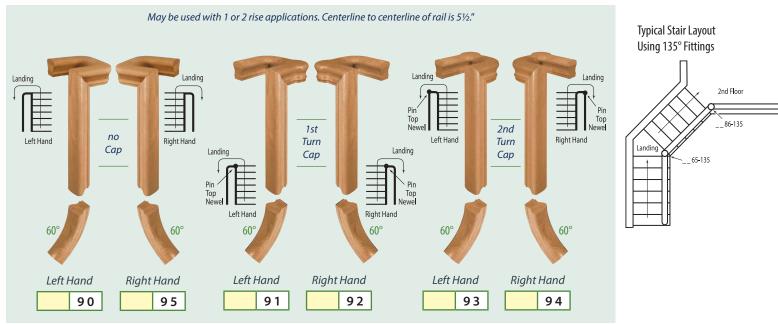




								RAIL I	FITTING
MADE IN THE U	SA ★★★		Order	ing Mat	trix				M P O N E N T S
	0								
		5-2-	3 00				5-	C-1	
6701	6710*	6910	9500	9400	C2	C3	9700	6042	9300
76	77	79	95	94	C2	C 3	97	78	93
P125									
	P175	P175	P 1 7 5	P175	P175	P125	P175		P175
*6710W = 77xxW *6710G = 77xxG Custom plowed sizes available, please call with your requirements.									
	*6710G = 77xxG *6710K = 77xxK		- Custon	i piowed sizes d	valiable, pieds	e cuii witti your	requirements.		

For Fittings with Caps


See cap options on page 267

Quarterturn Gooseneck (Flat)

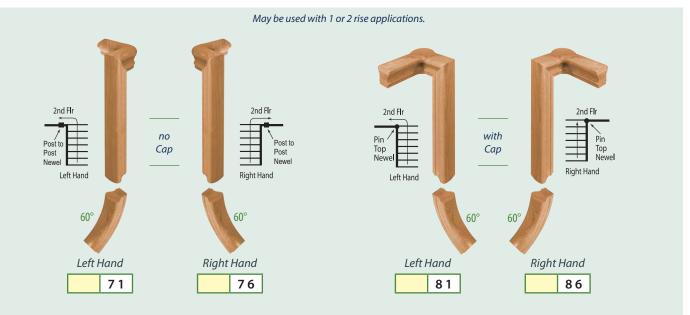

135° Gooseneck

Straight Gooseneck

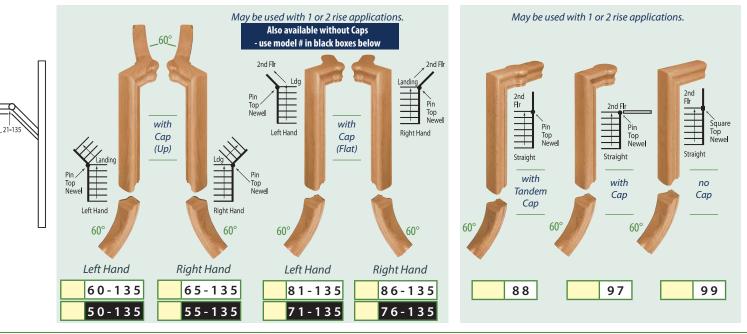

We offer Starting Steps in all of our wood species and a selection of styles to meet most any installation requirements. Starting Step treads are 1¹/₁₆" thick and the overall height with the riser is 7²⁵/₃₂". Steps come with shoe & cove moldings. Starting Step length is measured by the length of the "notch" ("X"), with the standard being 48". Both lengths shorter and longer than 48" are available, please specify your "X" dimension when ordering. Single bullnose steps are reversible (except Walnut).




Utilize the elegant look of a double stacked starting step when designing your stairway. Please contact us for a quotation.




Starting Steps when using Volutes and Turnouts:

8010 and 8210 Single Bullnose or 8015, 8215 and 8415 Double Bullnose Steps may be used with all of our volutes and turnouts.

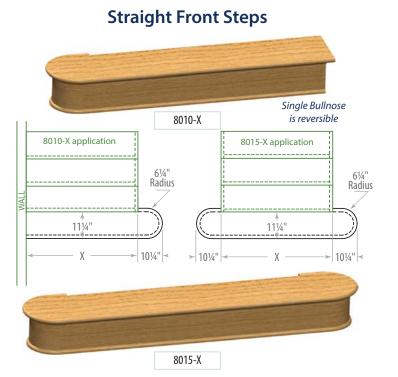




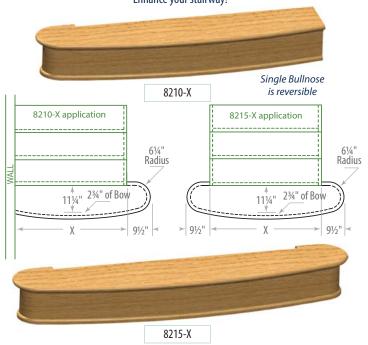



For Wider Handrails


Consider our 7" radius 8310 single bullnose and 8315 double bullnose steps. All or our volutes and turnouts may be used with these steps.

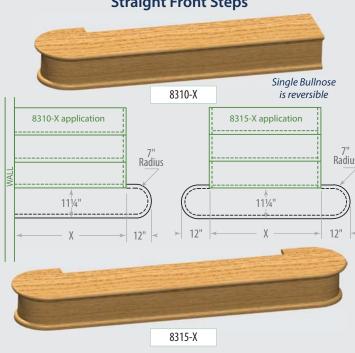

Straight Front Steps


Starting Steps when using Post to Post Newels, Box Newels and 90° Starting Fittings:

- Use 8040 or 8060 steps with Box Newels or when placing a Post-to-• Post newel at the second riser
- Use 8440 or 8640 Single Bullnose or 8460 or 8660 Double Bullnose Steps when using starting fittings with a 90° upeasing.
- Use 8440 or 8460 Steps when using volutes and turnouts with the following handrails: 6010, 6210, 6310, 6601, 9100 or with turnouts for 6109 and 6701.
- Use 8640 or 8660 Steps when using volutes and turnouts for 6400, 6519, 6710, 6910, 9500, 9700P or volutes for 6109 and 6701.

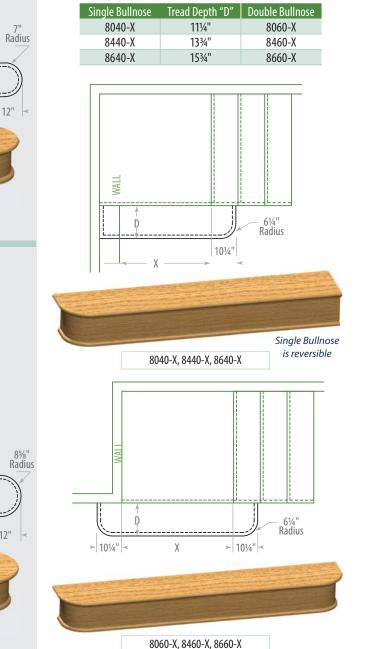



Steps when using Box Newels

- Use 8030 or 8050 steps with any of our Box Newels.

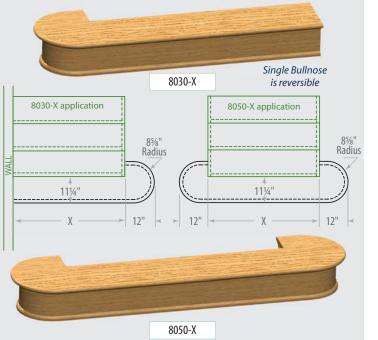




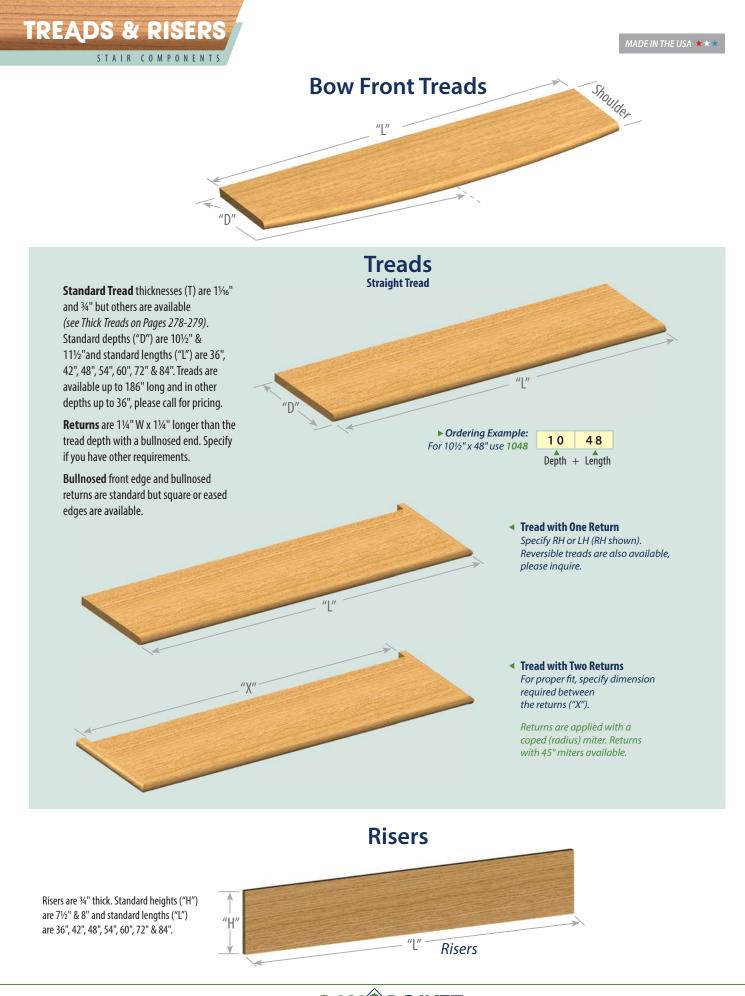

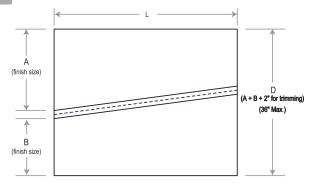


Winder Tread Blanks


- "L" should be 2" longer than the tread length
- "D" should be the sum of the narrow tread end plus the wide tread end plus 2" (A+B+2"). Our maximum is 36".
- Blank is good one side and yields 2 winder treads
- Bullnose option available on the two "L" sides

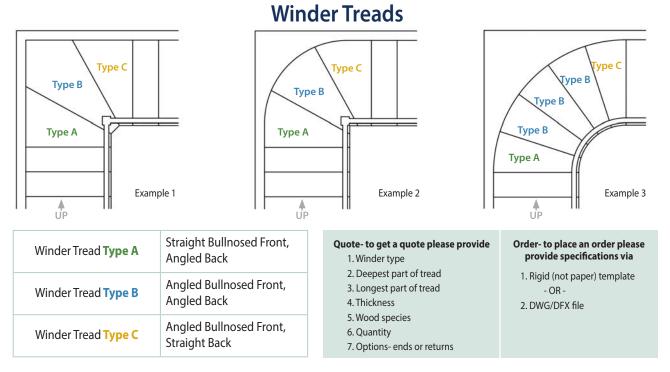

**** GRAIN ALWAYS FOLLOWS NOSING *****

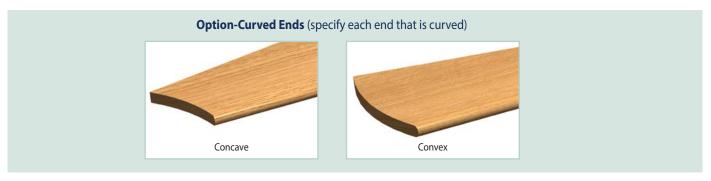

Option-Returns (specify each end that has a return)

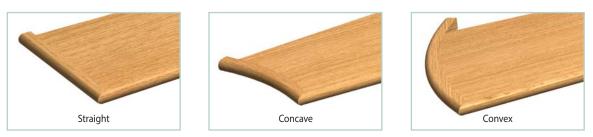



THICK TREADS

Thick Treads

Cantilever and other contemporary stairways demand the stunning impact of thick treads. Oak Pointe can manufacture these in most any configuration in unlimited wood species for interior or exterior applications. See our exciting new options below.



Depth (D): Standard tread depths are 10¹/₂" and 11¹/₂" but others up to 36" are available.

Lengths (L): Standard tread lengths are 36", 42", 48", 54", 60", 72" & 84" but others up to 186" are available.


Thickness (T): Standard tread thicknesses are 1¹/₁₆" and 3/4" but others available.

Construction-Standard: Treads will be edge glued for depth (face grain on top & bottom, edge grain on front and back and end grain on the ends unless the treads have returns which have face grain on the top & bottom and edge grain on the edge). 3/4" and $1\frac{1}{16}"$ thick treads are solid in thickness for our standard species and for other species whenever possible. Thicker treads up to $1\frac{3}{4}"$ thick may be solid or faced glued for thickness and over $1\frac{3}{4}"$ thick treads will be edge glued for depth and faced glued for thickness.


Construction- Optional: Treads can be constructed in butcher block patterns.

- <u>BBT#1</u> Butcher Block Pattern 1: treads are face glued for depth with edge grain on top and bottom and face grain on front and back edge (end grain on ends). *Staves are full length of tread.*
- <u>BBT#3</u> Butcher Block Pattern 3: treads are constructed by gluing 1³/₄" square blocks with end grain on top and bottom of treads. Front and back edges and ends will be face and edge grain in a random pattern. Squares around the perimeter of the tread may vary in size from the rest. *Choose all one specie or alternate two.*





Specify your tread requirements and request a quote.



Overall dimens	ions	
	ngth (L)	
Depth (D) Qu	antity	
Species		
Bullnosed front Y N	Exposed Faces:	
(usually for treads up to 1- 1/16" thick) If not bullnosed please complete	Top: Yes	
radius questions	Front: Yes	
Check any corners that get radius	Bottom: YN	
Top: front edge back edge	Back: YN	
left edge	Left: YN	
right edge	Right: YN	
Bottom: front edge back edge left edge right edge Vertical corners	If yes on left or righ would you like flush returns Y N	





Thick Beveled Treads


Shown with return

NOTE: A nosing is not required where the tread depth is a minimum of 11" (check your local codes)

Side view with return, back edge of tread is straight


False Ends Application

When using a carpet runner down the center of the staircase, false end starting steps and kits are an economical solution.

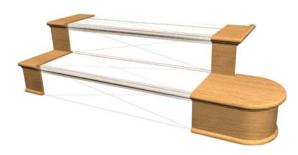

False End Starting Steps

Are reversible (except Walnut) and used with any of our turnouts and volutes.

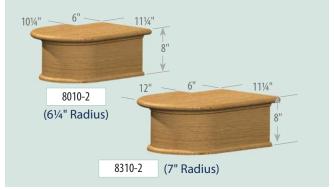

Assembled False Tread Kit with Return Unassembled False Tread Kit Specify Left Handed (LH) or Right Handed (RH) For field assembly into LH, RH or Closed False Tread. DIMENSIONS: Inside DIMENSIONS: 5¼" x 12¾" Inside Outside 8071-LH 8071-RH 6" x 11" 6½" x 14" Outside Riser (included) 7¼" x 12¼" $\frac{1}{2}$ " x 5 $\frac{1}{4}$ " x 8" 8079 Riser (included) 1⁄2" x 6" x 8"







Flooring


Flooring is a great option for landings. ³/₄" thick flooring up to coverage widths of 8³/₄" (when material is available). End matched (tongue and groove on the ends of the boards) is not standard but maybe requested as an option. Specify your required coverage width (C) and either number of pieces and lengths or square feet in random lengths.



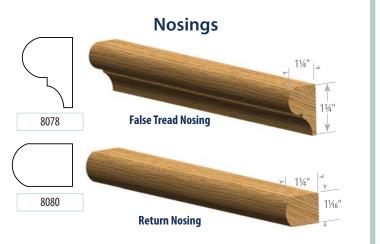

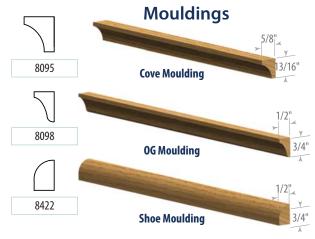



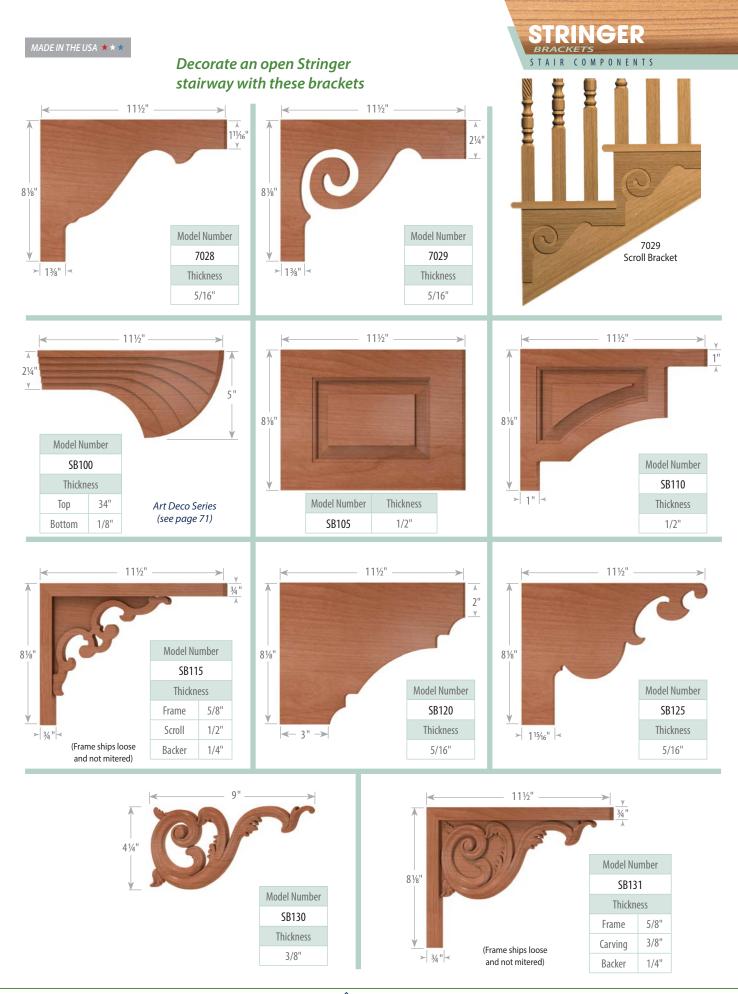

HARDWARE

 $\mathsf{S} \ \mathsf{T} \ \mathsf{A} \ \mathsf{I} \ \mathsf{R} \quad \mathsf{C} \ \mathsf{O} \ \mathsf{M} \ \mathsf{P} \ \mathsf{O} \ \mathsf{N} \ \mathsf{E} \ \mathsf{N} \ \mathsf{T} \ \mathsf{S}$

Our selection of Wall Rail Brackets includes a variety of styles, finishes and price points. On this page, the bracket setback (the measurement from the wall to the handrail centerline) is designated. Actual finish color may vary from the photographs.



601 Series For flat bottom rails. 2¾" setback.
611 Series For flat bottom rails. 3¾" setback.
606 Series For round rails. 2¾" setback.



3002 Series For flat bottom rails. 2¾" setback. A popular choice in many quality finishes.

Wall Rail Brackets

MADE IN THE USA ★ ★

Stainless Steel Wall Rail Brackets



Wall Rail Bracket Rail mounting

hardware included (see round rail

hole drill gauge 6039-GAU2 page

196). Wall screws not included.

Setback is 2.95"

Many stainless steel wall rail brackets available. See our Modern Metal Collection section of this catalog.





Buttons and Flat Head Plugs

Specify wood species when ordering:

All of our buttons and flat head plugs are made from face grain.

1-1/2-FPLUG is a 5/16" thick x 1½" flat head plug.

1-FPLUG is a 5/16" thick x 1" flat head plug.

3025 is a pack of 25 1" flat head plugs.

1/2-FPLUG is a ½" flat head plug.

3076-100PK Steel Dowel

Screws Pack of 100 threaded dowel

screws 5/16" diameter x 21/2" long.

3076 Steel Dowel Screw

5/16" diameter x 21/2" long.

Individual threaded dowel screw

Miscellaneous

3000 or 3079 Rail Bolt Kit (shown) or 3001 Rail Bolt Model 3001 is just the rail bolt while model 3079 includes rail bolt, plastic washer, nut and 1" plug (specify species). 3000 includes all parts expect the plug.

Use to attach handrail to: handrail, newel, wall, fitting; or fitting to fitting. 0

3078 Rail and Post Fastener

Kit to attach newels to stair risers or handrail. Specify wood species for 1" plug.





3053 DOWEI SCHEW DRIVER attaches to your drill and is threaded to accept dowel screws. This is a great accessory to quickly drive steel dowel screws into predrilled balusters.



901 Rail Bolt Wrench


It automatically threads the nut onto a rail bolt with the aid of a simple rubber band. It also helps to easily install the bolt and its special design allows for access to the nut for tightening.

1/2-BPLUG is a

3026 is a pack of

1/2" button plug.

50 buttons 1/2".

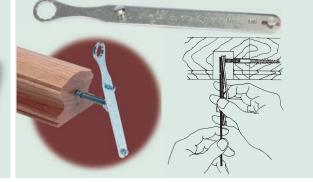



Min

3085 Mini Lock used to fasten

handrail to newel post for a

fully concealed installation.

1¼" diameter plates.

Newel Mounting Kits


HARDWARE STAIR COMPONENTS

www.StairPartsandMore.com

Fas-N-Fast

wel Mounting Kit

#3007



Model Number 3007

- Quick, Easy and Completely Concealed Installation
- Works on Round and Square Newels
- No Trim or Plugs Required
- No Special Tools
- Adjustable threaded stud for positioning newel
- Electroplated galvanized USA steel



3004 Newel

Mounting Kit is

installed. Use on

install steel insert. Newel is then fastened

with hanger bolt into

insert.

fully concealed when

finished floors, starting steps or landings. Bolts and nuts are used to Package comes with two 11%/6" dia. metal disks, threaded stud and installation instructions. Requires 6 screws, not included, 3½" x #10 Galv. deck screws suggested.

Watch our installation video on Youtube http://www.youtube.com/ watch?v=RJ1LLBmNu_0

3005 The KeyLOCK[™] Newel

Post Fastener is fully concealable.

No extra moulding

or wood plug is


required. Use on

finished floor

and concrete.

surfaces, stairs,

nosing, ceramic tile,

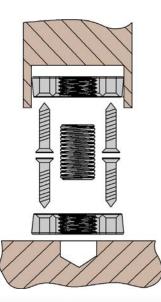

3006 Newel Plate Fastener and 3006-KIT Newel Plate Fastener with Trim provides a simple method for installing posts under carpet, over concrete and over finished floors. 3006 comes with plates and screws. 3006-KIT comes with plate, screws, and trim for up to 3½" newel. Trim must be mitered and fit on the job- specify your wood species when ordering.

3008 Sure-Tite™

Newel Fastening System has become the most widely used newel post fastener among stair professionals. With the Sure-Tite[™], a newel post can be installed securely in as little as ten minutes. It will not loosen over time and it can be installed directly over any finished floor. Our fastener is packaged with a 10¾" lag bolt, 1 washer, 1 nut and 2 plugs 1½" W- 1 Oak & 1 Maple.



Shown in


Oak Pointe

product


display

Plate is 3/16" thick x 4 5/8" square



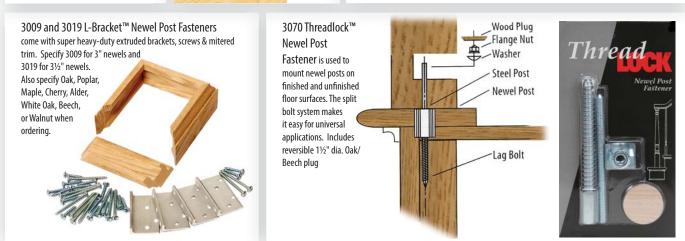



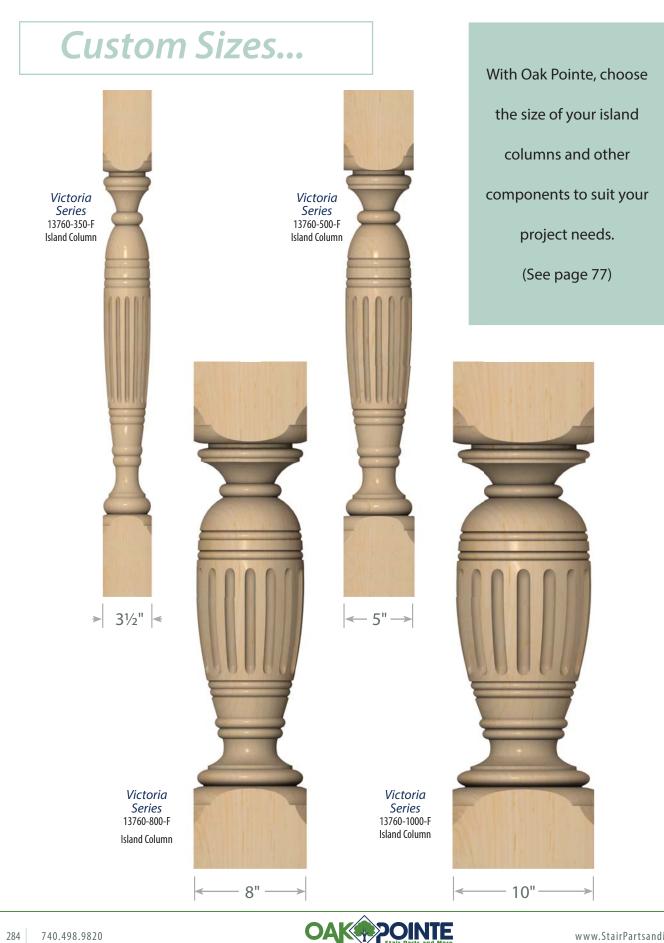






CABINETRY

COMPONENTS & MOULDINGS

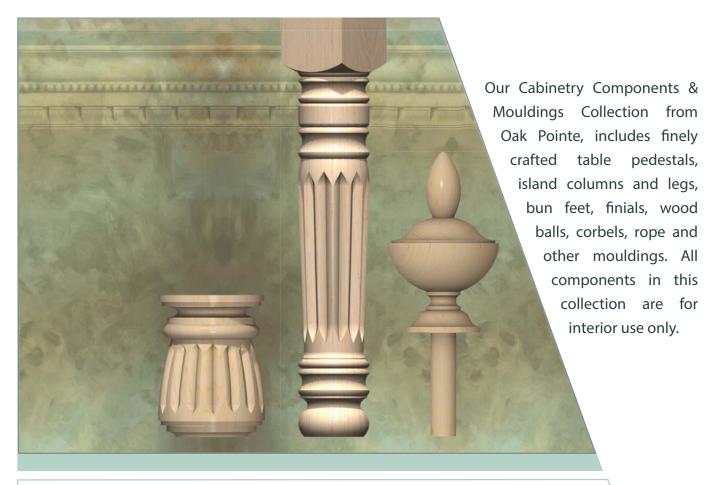

Cabinetry Components and Mouldings

Custom components are an integral part of our business. Call for pricing on your designs for interior or exterior use.













Top off any post in style: Options & Details-Pages 300-302.



Choose from diameters up to 14¾": Options & Details-Page 303.

Mouldings & Boards

Mouldings and S4S Boards for most any application: Options & Details- Pages 306-308.



Corbels

Corbels can be structural or decorative enhancements for interior or exterior. Page 290.

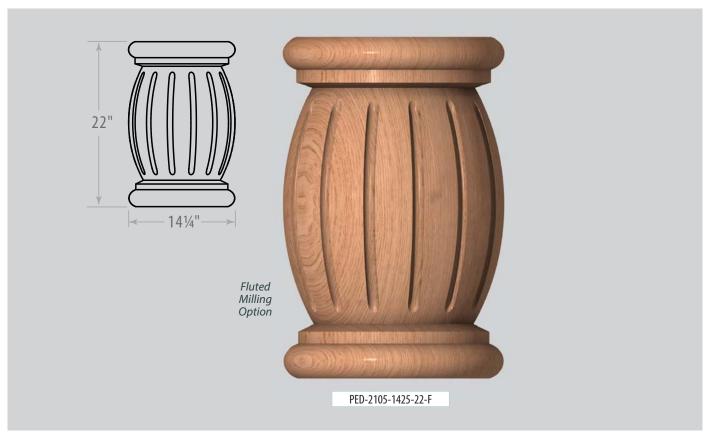


TABLE PEDESTALS

Table Pedestals



PED-1000-5.5-21.875-R





COLUMNS & LEGS

CABINETRY COMPONENTS & MOULDINGS

These two pages are an index to every Kitchen Island Leg in this catalog. For available milling options and dimensions, go to the page indicated.



		50100	durac		
Mt Vernon	Brown	stone	Miscellaneous	Round Tapered	Titan
Columns	Columns	Legs	Legs	Legs	Columns
Ē					
see page 291	see pag	je 291	see page 292	see page 292	see page 293

Selection Guide

see page 292

MADE IN THE USA $\star\star\star$



Avenue i Main Street Federal Malta Farm Emperor Cambridge Columns Columns Columns Columns Legs Columns Columns Legs Columns Legs see page 66 see page 68 see page 58 see page 60 see page 63 see page 82 see page 86





COLUMNS & LEGS


CABINETRY COMPONENTS & MOULDINGS

MADE IN THE USA $\star\star\star$

Selection Guide

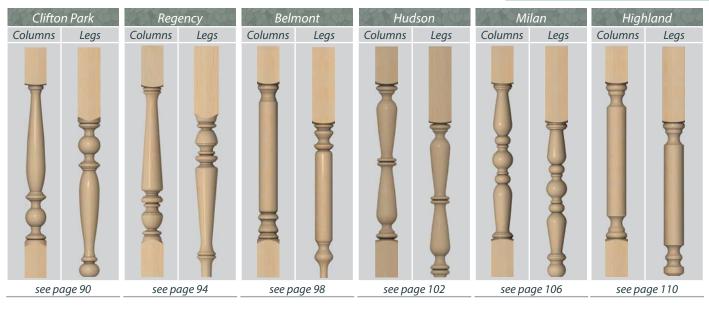

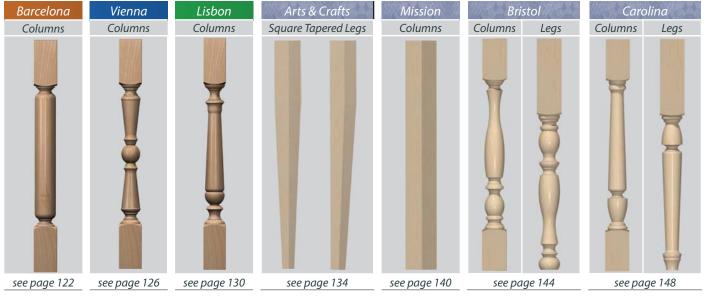

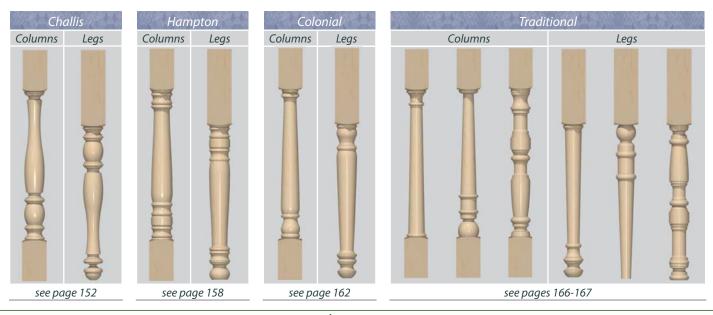



CORBELS & OPTIONS

CABINETRY COMPONENTS & MOULDINGS

Corbels

Corbels can be decorative or structural and have many uses. Interior corbels are used to support kitchen island tops, mantles, range hoods and shelves. On the exterior corbels are used to decorate the eaves of a roof





Decorative Rosettes carved into Island Columns and Leg blocks:

Decorate your Legs and Island Columns with rosette designs carved into their top blocks. When ordering please specify the number of sides you want this option on:

2 Opposite blocks- add part -"2180" to the Rosette number

2 Adjacent blocks- add part -"290" to the Rosette number

3 blocks- add part "-3" to the Rosette number

4 blocks- add part "-4" to the Rosette number

For 3" wide legs – specify Rosette R1259 (which is 2¼" wide) or for parts up to 3½" wide choose R1266 (which is 2-9/16" wide)



R1259 (on 3" Block)




R1266 (on 3½" Block)



R1266 (on 31/4" Block)

Corbels & Columns/Leg Options

MADE IN THE USA $\star\star\star$

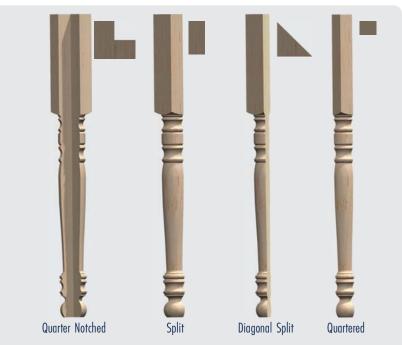

Split and Diagonal Split Columns & Legs

must be ordered in pairs. Quarter Columns must be ordered in sets of 4. When ordering half, diagonal half cut and quartered columns the parts will be dimensionally undersized due to the saw cut and sanding. Please note that certain designs are not symmetrical and may not lend themselves to being split.





The following pages represent our unique Island Columns, Interior Posts & Legs. They are not associated with specific stair part groups. To see group related Island Columns & Legs, use our convenient Island Columns & Legs Selection Guide on pages 288-289 for a quick reference guide to each stair part series.

Island Columns




Brownstone Series

Square

Round

ISLAND COLUMNS


CABINETRY COMPONENTS & MOULDINGS

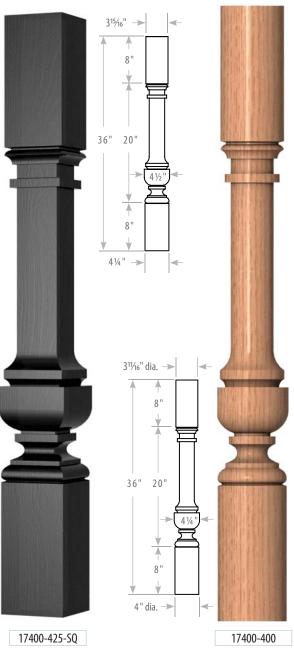



Paint grade only.

Legs

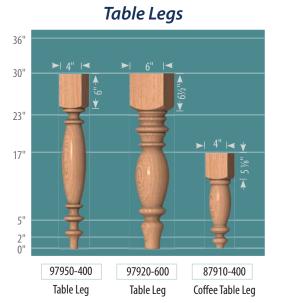

LEGS

CABINETRY COMPONENTS & MOULDINGS

Round Tapered Legs I◀ 3¼" dia. 43" 🗲 3¼" dia. 36" 🗲 3¼" dia. 30" 21⁄8" dia.►∟ ◄ 23" I**⊲** 2%" dia. 18" 5" 2" 0" 15⁄8" dia. 15⁄16" dia. 15⁄8" dia. 15⁄8" dia. 11⁄16" dia. 121150-350 101150-350 91150-350 81150-275 71150-225 Bar Leg Island Leg Table Leg Coffee Table Leg End Table Leg

Round Tapered Milling Options












Titan Island Columns and Legs

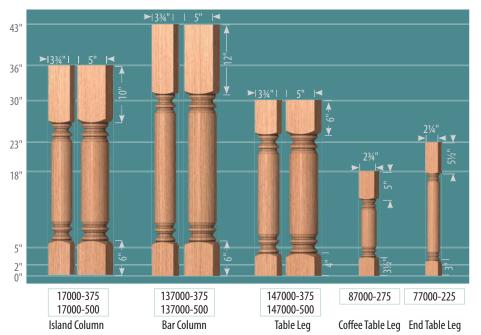



Titan Milling Options

Milling Options	Barley 4	Barley 6 Left Hand	Barley 6 Right Hand	Doric Flute 32	Fluted	Flute with Hip	Reeded	Ribbon 3	Rope Twist Left Hand	Rope Twist Right Hand	Rope Twist 1
Code	BAR4	BAR6LH	BAR6RH	DF32	F	F2	R	RIB3	RTLH	RTRH	RT1

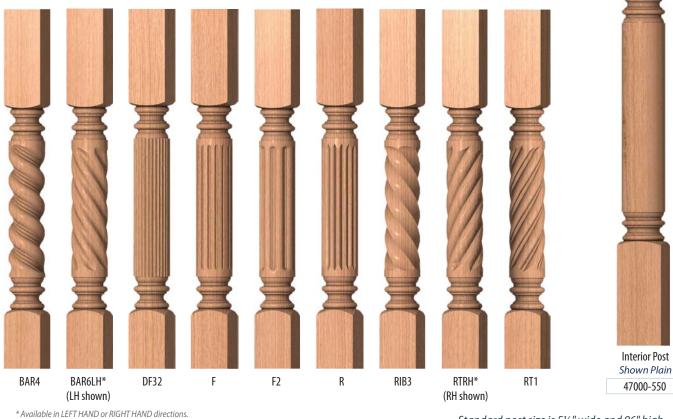


Standard post size is 5½" wide and 96" high.



Interior Post

47000-550




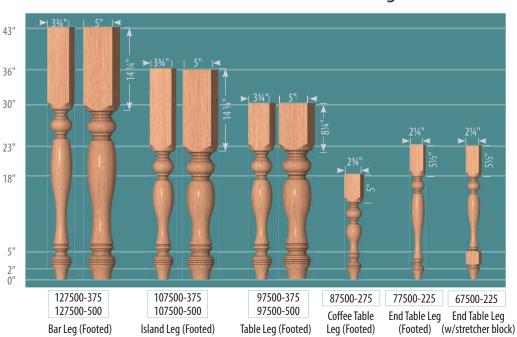

French Manor Island and Table Legs

French Manor Milling Options

						Top Bloc	k Milling
Milling Options	Cork Screw	Fluted	Reeded	Reeded Ball	Ribbon 2	Fluted Block 1	Fluted Block 2
Code	CS	F	R	RB	RIB2	FB1	FB2

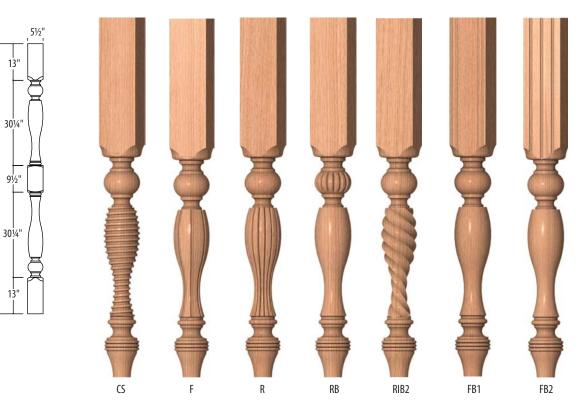

Standard post size is 5½" wide and 96" high.


96"




Interior Post Shown Plain


47500-550

Windsor Island Columns and Legs

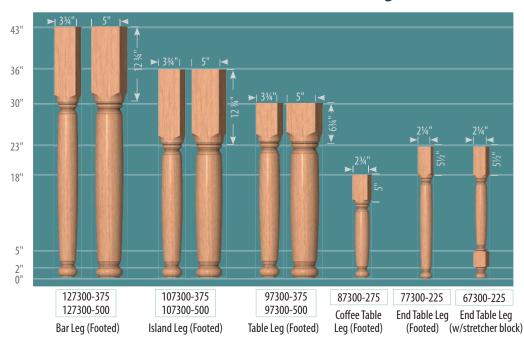

Windsor Milling Options



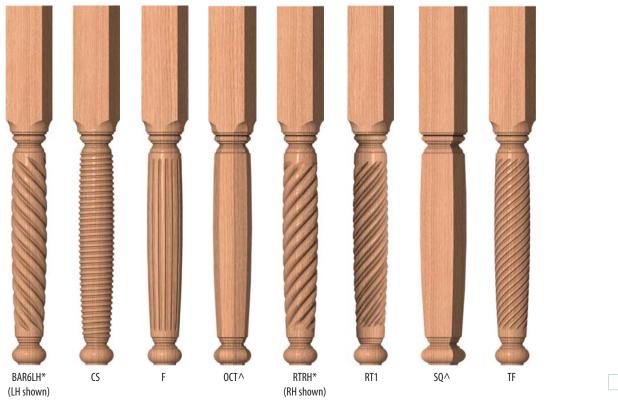

Standard post size is 51/2" wide and 96" high.

WINDSOR

CABINETRY COMPONENTS & MOULDINGS



Interior Post Shown Plain


47300-550

MADE IN THE USA ★ ★

Wiltshire Island and Table Columns ►| 3¾"| 43" 51/2' ►|3¾" | 36" 13" 30" -0 %"→ 23" 30 1/4 18" 96" 9½" 5" 301/4' 2" 0" 17550-375 137550-375 147550-375 17550-500 137550-500 147550-500 13" Island Column Bar Column Table Column



Wiltshire Island and Table Legs

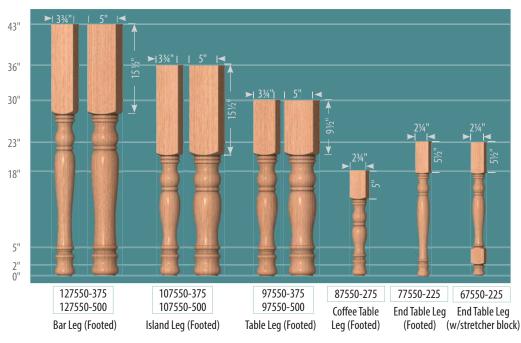

Interior Post Shown Plain 47550-550

Standard post size is 5½" wide and 96" high.

WILTSHIRE

CABINETRY COMPONENTS & MOULDINGS



36'


The Island Box Column may be used with or without the 1³/₄" top cap which is shipped loose for field installation. These columns have face grain on all four sides and have a hollow core. For a weight bearing Island Box Column add "WB" to the part number to get a solid core.

Multi-Species: On any of these styles change the species of the Mouldings and on Panel box columns change the species of the panels. For an authentic Mission look, on Panel configurations, add Square Sticking (add "SS" to the model number) and panels in the upper section! (add -4 to the model number).


<u> </u>		
-	7	Milling & Pane
	1	Circle 1 Flute
	51/2"	Circle 2 Flute
S I I I I	572	Fluted
		Mission
		LH V-Groove
18-20		RH V-Groove
		6 Centered
		V-Grooved
		9 V-Grooved
		Flat Panel
		Flat Panel
		Eyebrow Top
	l '	Round Top
	231⁄2"	2 Even Flat P
		2 Even Flat Po Eyebrow Top
100		2 Even Flat Po Round Top
		Raised Panel
		Raised Panel
		Eyebrow Top
W. S. Y		Round Top
		2 Even Raised
1115	Ť	2 Even Raised Eyebrow Top
< 4¼" ≻	7"	2 Even Raised Round Top

illing & Panel Options	Code	
Circle 1 Fluted	CIR1-F4	
Circle 2 Fluted	CIR2-F4	
Fluted	F	
Mission		
.H V-Grooved	M4L-VG4	
RH V-Grooved	M4R-VG4	
5 Centered	M6C-VG4	
/-Grooved	1000-104	
9 V-Grooved	M9-VG4	
Flat Panel		
-lat Panel	FP	
Eyebrow Top	FP-ET	3
Round Top	FP-RT	
2 Even Flat Panels	FP-2E	
2 Even Flat Panels	FP-2E-ET	
yebrow Top	II-ZL-LI	
2 Even Flat Panels Round Top	FP-2E-RT	
Raised Panel		
Raised Panel	RP	
Eyebrow Top	RP-ET	
Round Top	RP-RT	
Even Raised Panels	RP-2E	
2 Even Raised Panels		
Eyebrow Top	RP-2E-ET	
2 Even Raised Panels Round Top	RP-2E-RT	


14392-425 Island Box Columns Mission Style Milling Options

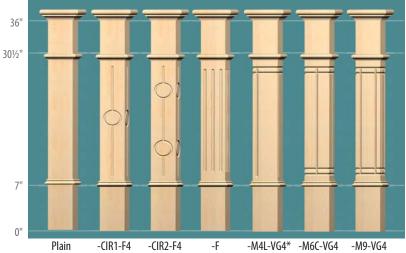

*for RH version. order 14392-425-M4R-VG4

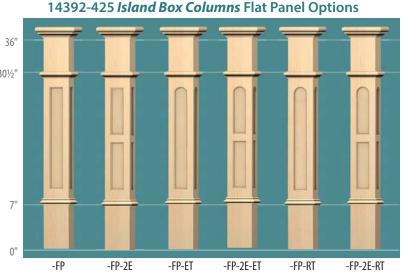

14392-425 Island Box Columns Raised Panel Options

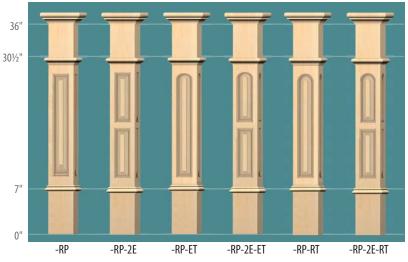

14392-425-FP-2E-SS-4

All of our Island Box Column panels are standard with Round Sticking... order optional Square or Step Sticking.






Step Sticking (-SP)

See our coordinating Box Newels on pages 31-55, as well as coordinating Mission legs, columns, bun feet and stair parts.








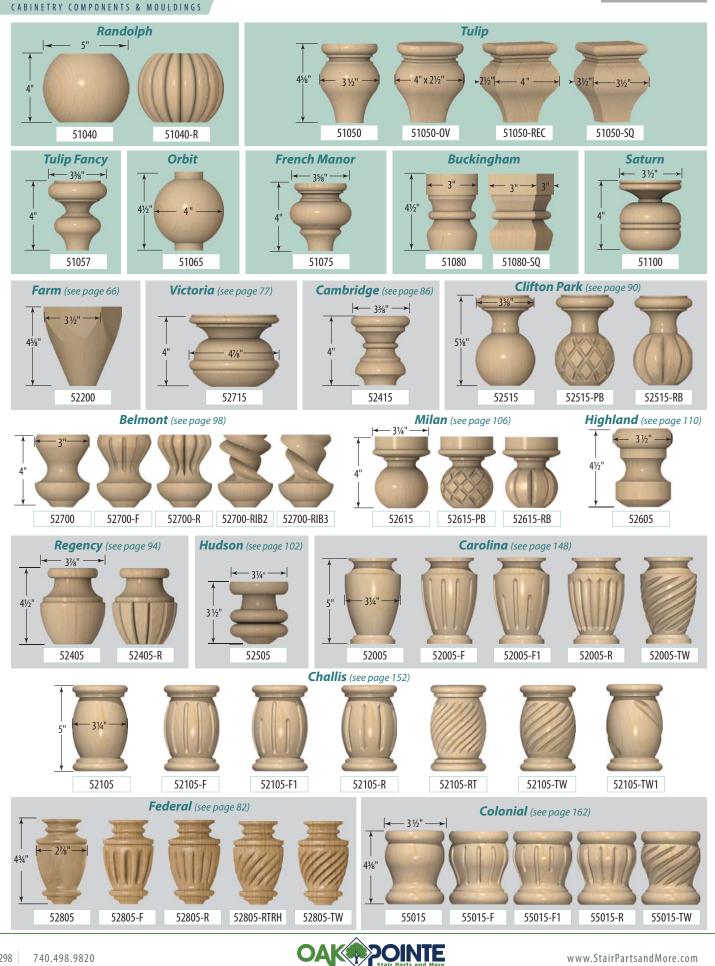

BUN FEET CABINETRY COMPONENTS & MOULDINGS

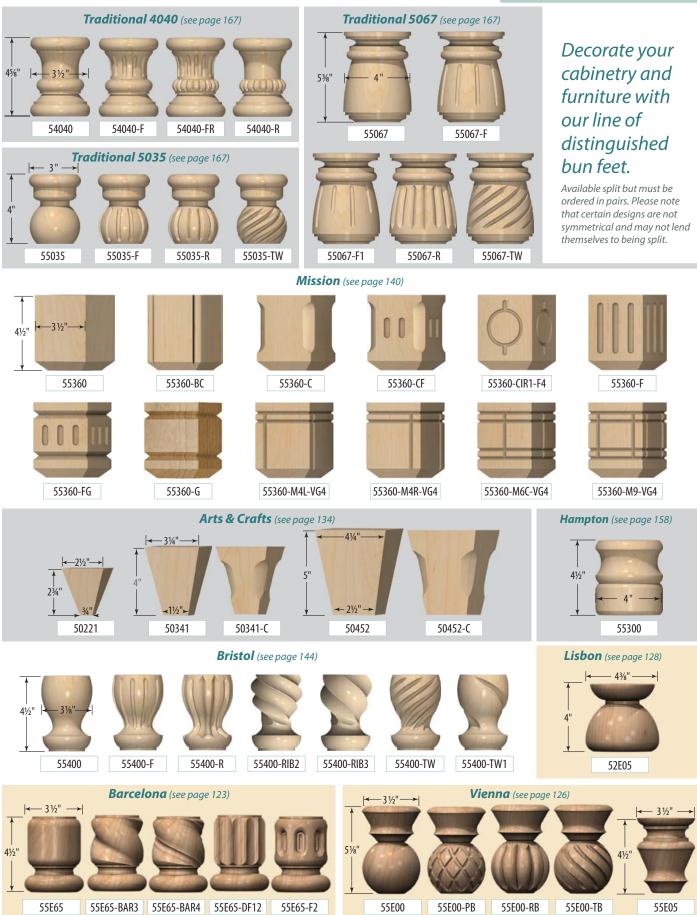

POINTE Stair Parts and Mar


 $\langle \langle$


Finials

FINIALS

CABINETRY COMPONENTS & MOULDINGS

Choose any of these finials as a post to post newel top, newel drop or applied to box newels as an accent.

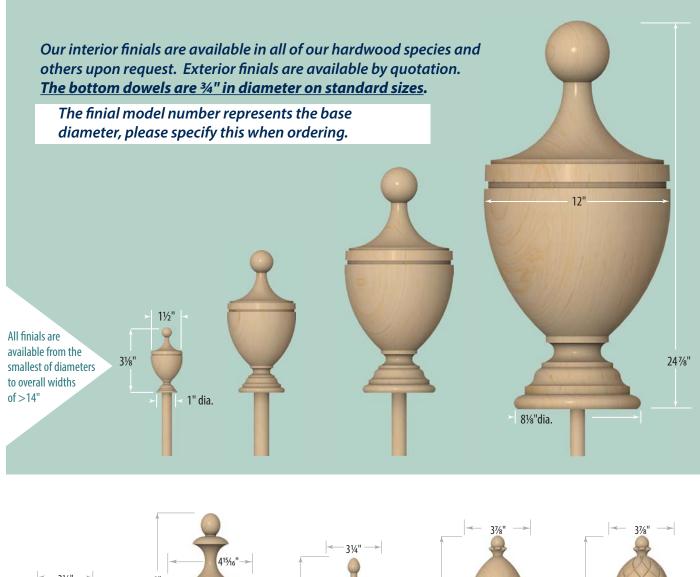


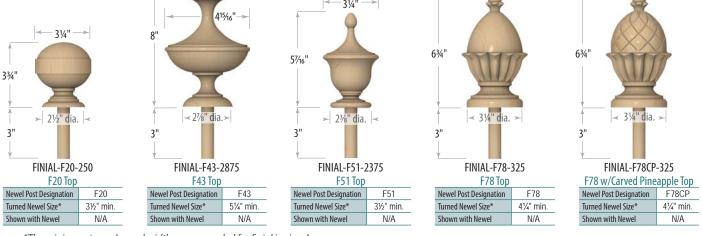

*The minimum turned newel width recommended for finial in size shown. Note: Finials are turned on turned newels (not applied with a dowel). See box newels for maximum recommended finial base diameters.






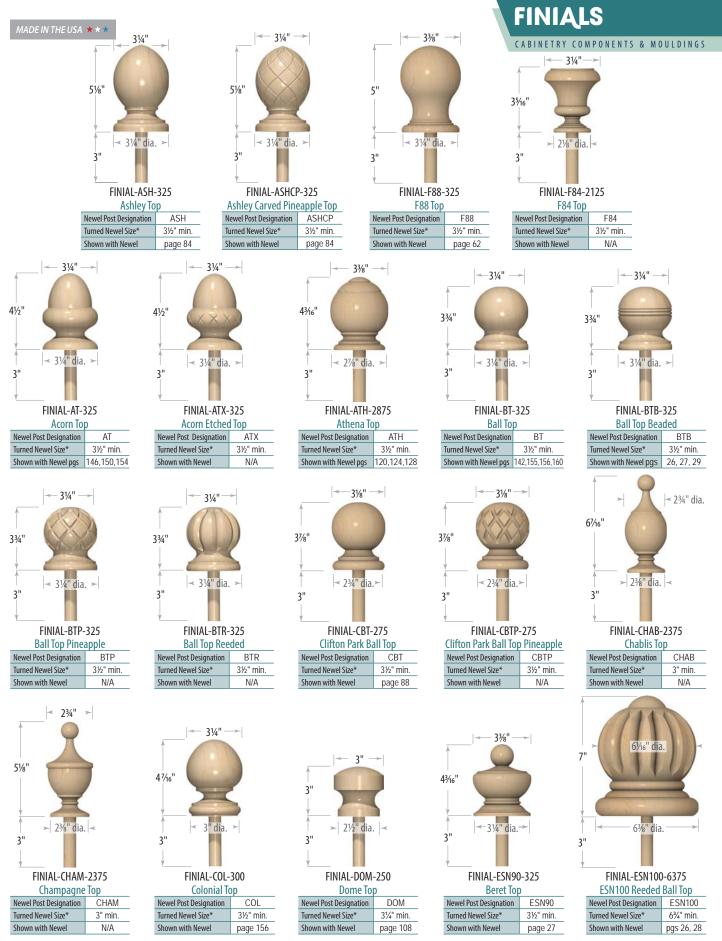

*The minimum turned newel width recommended for finial in size shown. Note: Finials are turned on turned newels (not applied with a dowel). See box newels for maximum recommended finial base diameters.



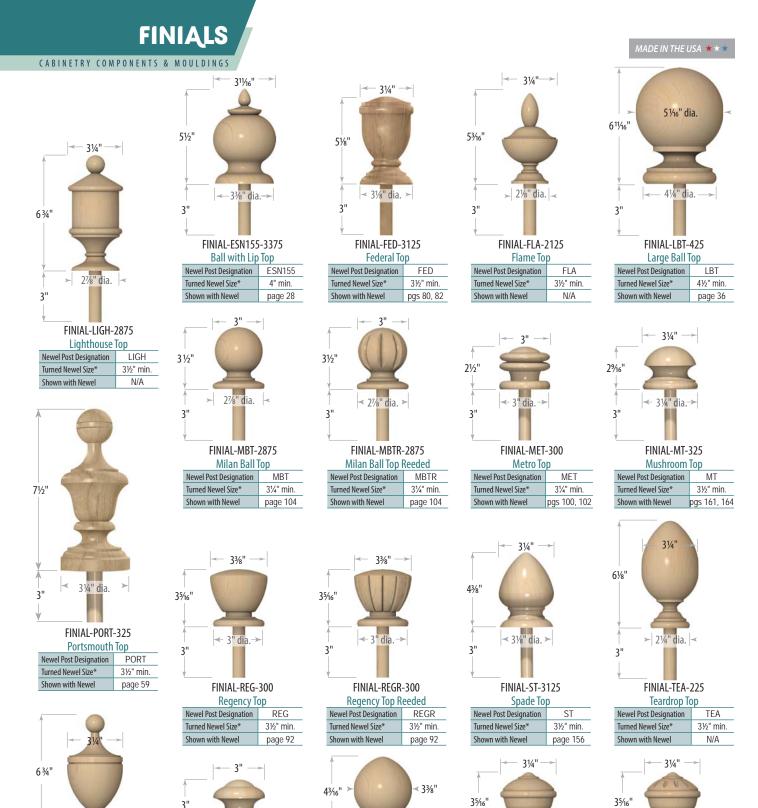

Shown with Newel *The minimum turned newel width recommended for finial in size shown.

Turned Newel Size*

Newel Post Designation

3"

 3" dia.

FINIAL-TEM-300

Tempo Top

TFM

3¼" min.

page 96

Note: Finials are turned on turned newels (not applied with a dowel). See box newels for maximum recommended finial base diameters.

Newel Post Designation

Turned Newel Size*

Shown with Newel

► 2¼" dia.

FINIAL-URN-225

Urn Top

URN

31/2" min.

N/A

3"



≺ 2⁷⁄8″ dia. ≻

FINIAL-VEN-2875

Venus Top

Shown with Newel pgs 120,124,128

VFN

3½" min.

Newel Post Designation

Turned Newel Size*

≺ 31⁄8" dia. ≻

FINIAL-VIC-3125

Victoria Top

VIC

3½" min.

page 73, 74

Newel Post Designation

Turned Newel Size*

Shown with Newel

ź'

≺ 3½°" dia. ≻

FINIAL-VICF-3125

Victoria Top Fluted

VICE

31/2" min.

page 74


Newel Post Designation


Turned Newel Size*

Shown with Newel

3'



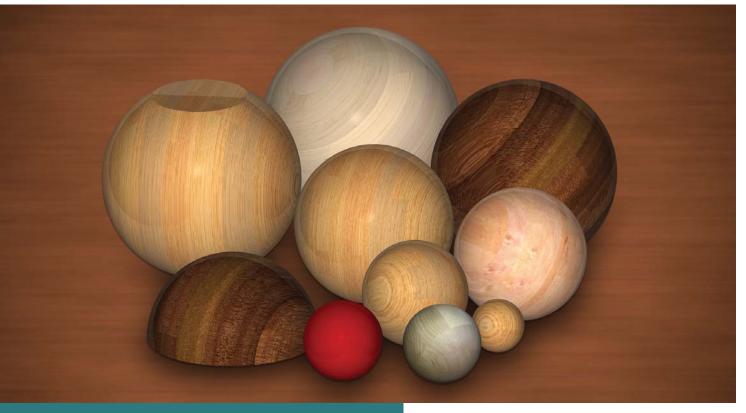

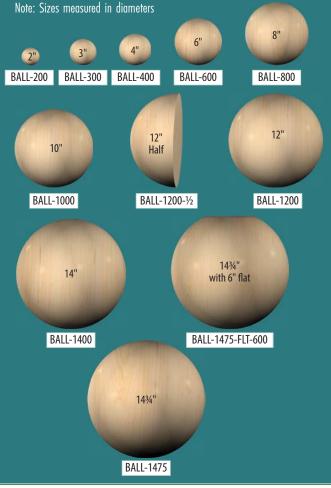

Laminated Wood Balls

Wood balls have a variety of uses. Choose from full round, half round (must be ordered in pairs) or round with flat(s). Please send drawing for balls with more than one flat. All available in our usual hardwood species and more.



CABINETRY COMPONENTS & MOULDINGS

MA

When you order a Fireplace Mantel or Mantel Shelf from Oak Pointe you get a beautiful focal point for your hearth with the same attention to detail that goes into all of our products.



Fireplace Mantel Surrounds



FPM220 Shown with Stainless Steel panels



FPM230 Shown painted with Maple top



FPM240 Shown with Hand Hewn #11



FPM250





FPM270




Fireplace Mantel Shelves

NOTE: Firebox openings have non-combustible facing materials around them (such as marble, brick, etc). Local building codes specify the minimum required distance that the mantel may be from the firebox opening. Oak Pointe Mantels can be designed and constructed to meet your code or space requirements. Oak Pointe mantels were designed to add beauty to your fireplace with depth and fine details. If your facing material is not wide enough to allow for our standard projections, Oak Pointe can either change the projection or supply optional 3/4" thick wood surround material to fit between our main surround and your facing material. Please check with your local building department.

Mantel Shelves: Please provide your wood species, overall length, height and depth (projection) required

Mantel Surrounds: Please provide the information below

Æ	
FPMS222	Shown with Stainless Steel panels
FPMS232	l i i i i i i i i i i i i i i i i i i i
FPMS242	Shown with Hand Hewn #11
FPMS262	

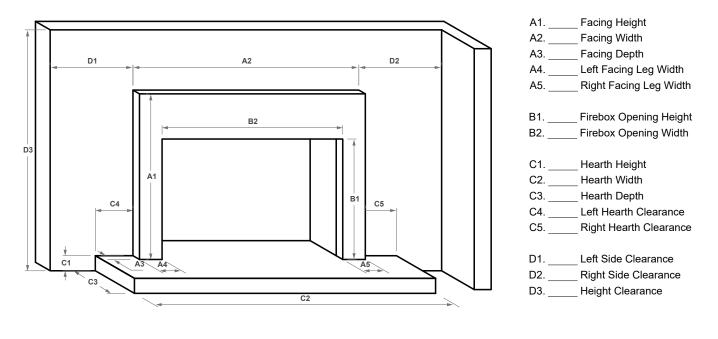

Mantel Style:

Wood Type:___




Rope Moulding

MOULDING LEGEND:	CODE	8	6		7					
Backband	BB	8	6							
Bar Rail	BR	8	- Ø				O/			
Crown or Cove Moulding	СМ		8	- <u>6</u>	1		6/			
Casing	CA	8	9				OF			
Crown Base	СВ	8	2							
Chair Rail	CR	6	2							and the
Baseboard	BA	8	2				O.L			
Door Stop	DS	8					Contraction of the			
Plinth Block	РВ	1 (A)					1			
Rope Moulding	RM	1	6				O.C.			
Rope Moulding Beaded	RMB	3⁄8"	1/2"	5⁄8"	3⁄4"	1"	11/4"	11/2"	13/4"	2"
Molded Boards	S4S	RM375	RM500	RM625	RM750	RM1000	RM1250	RM1500	RM1750	RM2000

Rope Moulding Beaded


ROPE MOULDING

CABINETRY COMPONENTS & MOULDINGS

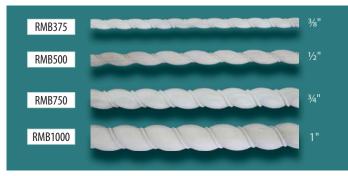

- Available standard or beaded rope
- Half round (shown), full round, quarter round, 3/4" round (outside corners)
- LH & RH ropes (RH shown)
- 3/8" to 2" standard length is 8', others available
- 3", 4" and much wider available (also see our columns) Large ropes will vary in design from ropes 2" & smaller


Mouldings and S4S boards below and on the following pages are sold in random lengths 3' to 16' or you may specify lengths for an upcharge on part or all of your order. Lengths are subject to availability of lumber. **Boards & mouldings are also available for radius windows and doors and for curved wall applications.**

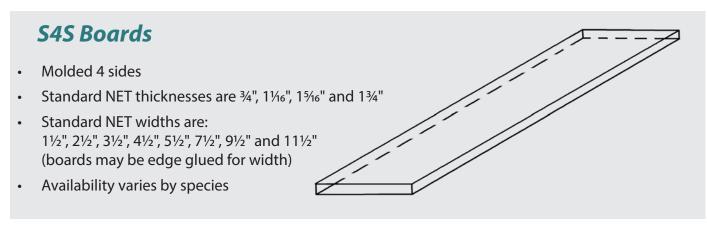






Group 1100

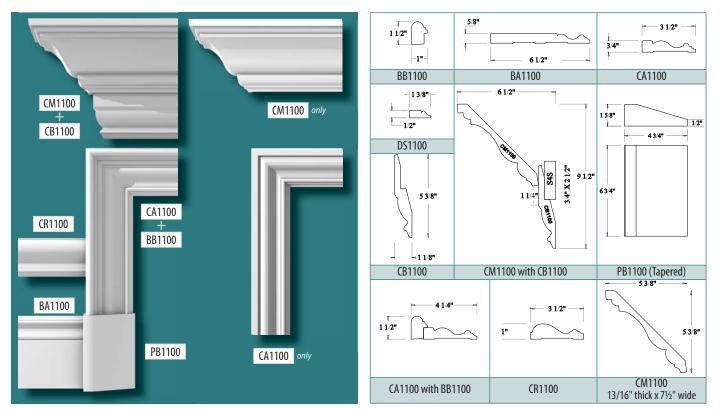


Group 1200

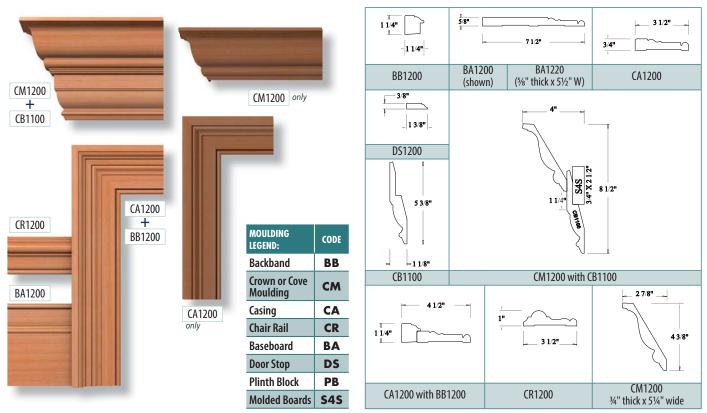

See shoe and cove moulding on page 280



Group 1300

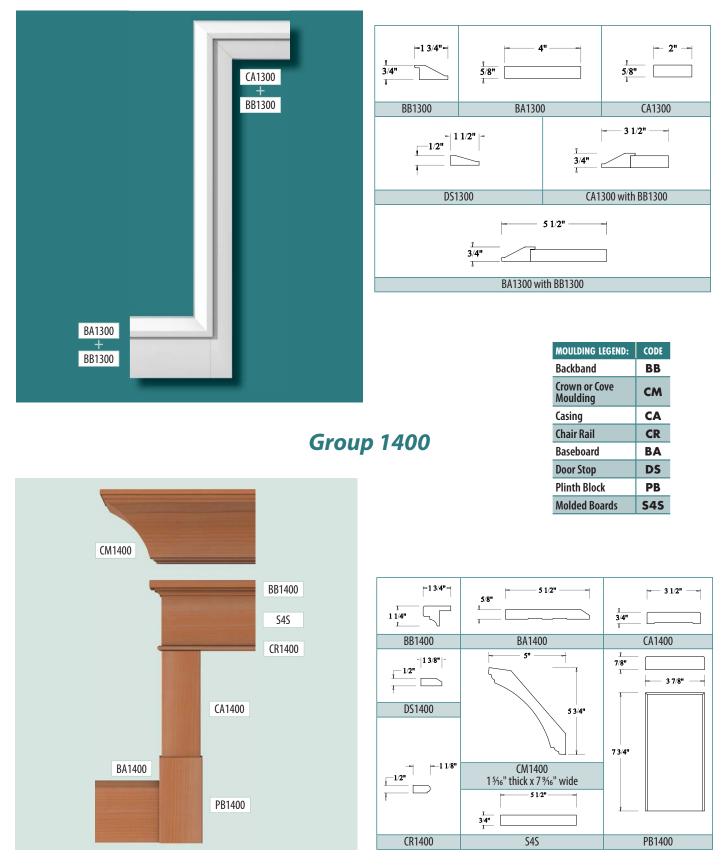

See shoe and cove moulding on page 280

COLUMNS & POSTS

MADE IN THE USA ★ ★

FIREPLACE/LARGE COLUMNS & POSTS

ROUND SQUARE OCTAGON

The Columns & Posts Collection, designed and manufactured by Oak Pointe, offers the most styles and milling options anywhere in the industry. Tapered and no tapered choices include round, square or octagon, Decorative for and Fireplace Columns or Interior Posts which coordinate with our Stair Parts and Leg Collections.

Columns & Posts Collection

Custom fireplace and large columns are an integral part of our business. All components in this collection are for interior use only. Call for pricing on your designs for interior or exterior use.










MADE IN THE USA $\star\star\star$

COLUMNS **Selection Guide**

Columns, Fireplace Columns & Interior Posts

See the samples and the pages referred to below for available milling options. Milling options may vary in appearance as the column width changes. Intermediate and smaller sizes than those listed are available. Also see our fireplace columns for smaller standard sizes. All columns and posts are stain grade hardwoods and nonweight bearing for interior use only.

For Fireplace Columns see pages 316-319.

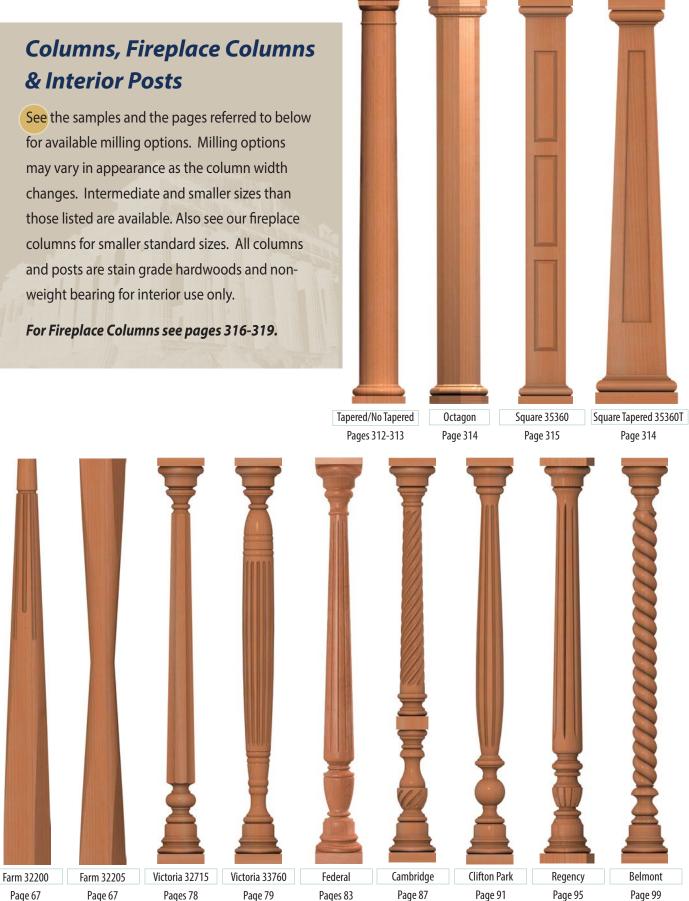



Page 67



www.StairPartsandMore.com


С

Ŕ

Ď

F



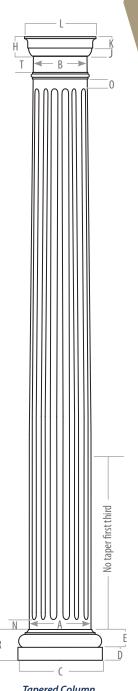

			S	haft Dimensi	ons *		
Column Size	Bottom Diameter "A"	Top Diameter "B"	Below Flute "N" +	Above Flute "O"	Above Neckmold "T"	Cap & Base Included	Standard Lengths (including cap & base)
550	51⁄2"	41⁄2"	2"	1"	21⁄2"	Tuscan	6', 7', 8'
750	71⁄2"	61%"	2"	1"	21⁄2"	Tuscan	6', 7', 8', 9', 10'
950	91⁄2"	81⁄4"	2"	1"	21⁄2"	Tuscan	6', 7', 8', 9, 10'
1150	11½"	10½"	2"	1"	21⁄2"	Tuscan	8', 9', 10'

NO Tapered Round Column Dimensions (Model 36000)

			S	haft Dimensi	ons *		
Column Size	Bottom Diameter "A"	Top Diameter "B"	Below Flute Above Flut "N" + "0"		Cap & Base Included	Standard Lengths (including cap & base)	
550	51⁄2"	5½"	2"	2'	2 Tuscan Bases	6', 7', 8'	
750	71⁄2"	71⁄2"	2"	2'	2 Tuscan Bases	6', 7', 8', 9', 10'	
950	91⁄2"	91⁄2"	2"	2'	2 Tuscan Bases	6', 7', 8', 9, 10'	
1150	11½"	11½"	2"	2'	2 Tuscan Bases	8', 9', 10'	

* Dimensions shown are after final field trimming of shaft bottom


+ After final field trimming


Neckmold on No Tapered Columns is not standard, but is available as an option



Tuscan Cap Dimensions


Column Size	Square Width "L"	Square Height "K"	Round Height "J"	Round Width "M"	Overall Height "H"	Model Number
550	7¼"	1¾"	1¼"	4¾"	3"	CAPTUS550
750	81%"	1¾"	1¼"	6%"	3"	CAPTUS750
950	11"	1¾"	1¼"	81⁄2"	3"	CAPTUS950
1150	13¼"	1¾"	1¼"	10¾"	3"	CAPTUS1150






Tuscan Base Dimensions

Column Size	Plinth Width "C"	Plinth Height "D"	Round Height "E"	Round Width "F"	Overall Height "R"	Model Number				
550	9" Sq	2"	2¾"	5¾"	4¾"	BASETUS550				
750	11" Sq	2"	2¾"	7¾"	4¾"	BASETUS750				
950	13" Sq	2"	2¾"	9¾"	4¾"	BASETUS950				
1150	15" Sq	2"	2¾"	11¾"	4¾"	BASETUS1150				
FF										




Attic Base Dimensions (Optional)

Column Size	Plinth Width "CC"	Plinth Height "DD"	Round Height "EE"	Round Width "FF"	Overall Height "RR"	Model Number
550	9" Sq	21⁄2"	4"	5¾"	6½"	BASEATT550
750	11" Sq	21⁄2"	4"	7¾"	6½"	BASEATT750
950	13" Sq	21⁄2"	4"	9¾"	6½"	BASEATT950
1150	15" Sq	21⁄2"	4"	11¾"	6½"	BASEATT1150

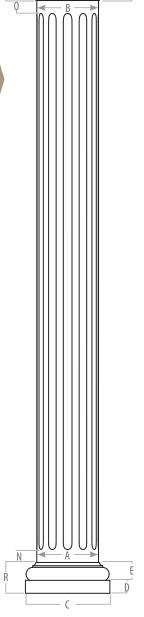

NO Tapered Column

Available split for pilasters or with biscuits for reassembly around a structural post



Tapered Column

Our Columns have not been tested for their weight bearing ability and therefore are sold as NON-Weight bearing.



COLUMNS

Tapered & No Tapered Columns

Hollow Interior Column Examples

Differentiate your home from your neighbor's home, our round tapered and no tapered columns come in a wide variety of milling options. These columns are hollow.

CODE
CS
DF12
F
F2
R
RIB4
RTRH
RT1
тw
TW1
TW2





36000-950-96-DF12 shown Doric Flute 12 36000-950-96-CS shown in Corkscrew No neckmold

No Tapered



30000-950-96-F

30000-950-96-F2



30000-950-96-R shown in Reeded



Detail of Fluted (F)







Detail of Reeded (R)



Shown in 9½" dia. x 96" H

30000-950-96-30000-950-96-RIB4 shown in Rope Twist RH shown in Ribbon 4 (right hand only)

RTRH



ITE

Twist 1







TW1





30000-950-96-TW2 shown in Twist 2




COLUMNS

MADE IN THE USA ★ 🖈



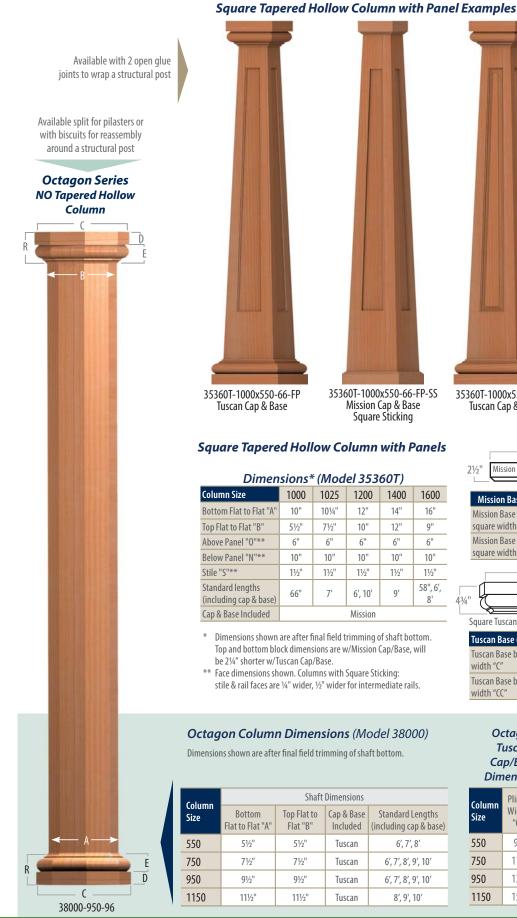

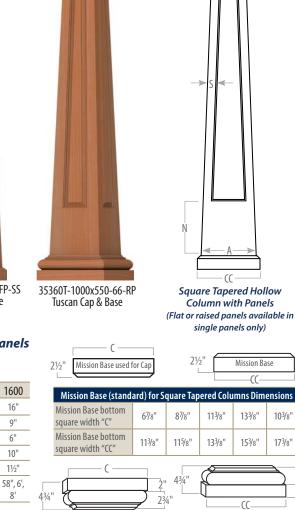

Square Tuscan Base used for Cap

Tuscan Base (optional) for Square Tapered Columns Dimensions							
Tuscan Base bottom square width "C"	9"	11"	13½"	15½"	12½"		
Tuscan Base bottom square width "CC"	13½"	13¾"	15½"	17½"	19½"		

T Ca	ctagor uscan p/Base nensio	e	R		F) 1 C	Ē
Column Size	Plinth Width "C"	Plinth Height "D"	Octagon Height "E"	Octagon Width "F"	Overall Height "R"	Model Number
550	9"	2"	2¾"	5¾"	4¾"	BASEOCTUS550
750	11"	2"	2¾"	7¾"	4¾"	BASEOCTUS750
950	13"	2"	2¾"	9¾"	4¾"	BASEOCTUS950
1150	15"	2"	2¾"	11¾"	4¾"	BASEOCTUS1150



Standard Lengths

6', 7', 8'

6', 7', 8', 9', 10'

6', 7', 8', 9', 10'

8', 9', 10'

1400

14"

12"

6"

10"

11⁄2"

9'

6"

8'


234

Square Tuscan Base

MADE IN THE USA ★ ★

Dimensions* (Model 35360)

decorative COLUMNS Square No Tapered with Panels Square Hollow Column with Panels (Flat or Raised Panels

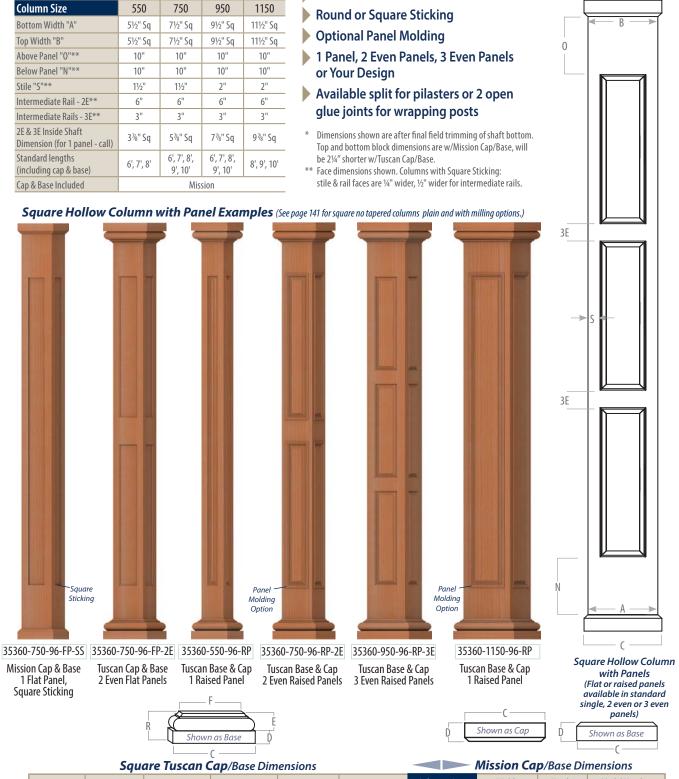

Plinth Width "C"	Plinth Height "D"	Moulded Height "E"	Moulded Width "F"	Overall Height "R"	Model Number	Column Size	Width "C"	Height "D"	Model Number	
9" Sq	2"	2¾"	5¾"	4¾"	BASESQTUS550	550	6%" Sq	21⁄2"	BASEMIS550	
11" Sq	2"	2¾"	7¾"	4¾"	BASESQTUS750	750	8%" Sq	21⁄2"	BASEMIS750	
13" Sq	2"	2¾"	9¾"	4¾"	BASESQTUS950	950	10%" Sq	21⁄2"	BASEMIS950	
15" Sq	2"	2¾"	11¾"	4¾"	BASESQTUS1150	1150	12%" Sq	21⁄2"	BASEMIS1150	



MADE IN THE USA $\star\star\star$




Solid Hardwood Fireplace Columns

Your fireplace will be an outstanding feature to any room with our Decorative Fireplace Columns. Intermediate and smaller sizes than those listed are available. Also see our full-size Decorative Columns for large standard sizes. See the samples and the pages referred to below for available milling options.



Round No Tapered

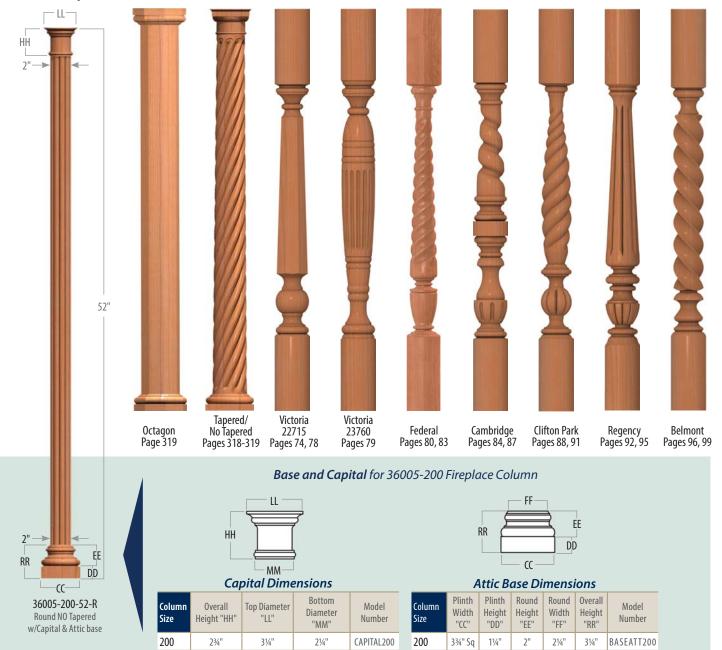



MADE IN THE USA $\star\star\star$






FIREPLACE

Selection Guide

	MILLING OPTIONS			CODE	MILLING OPTIONS
	Barley 2	BAR2	Flute with Hip	F2	Rope Twist LH
	Corkscrew	CS	Reeded	R	Rope Twist RH
	Doric Flute 6	DF6	Ribbon 1	RIB1	Rope Twist 1
	Doric Flute 12	DF12	Ribbon 2	RIB2	Twist
	Fluted	F	Ribbon 3	RIB3	Twist 1
					Twist 2

Tapered/No Tapered Fireplace Columns

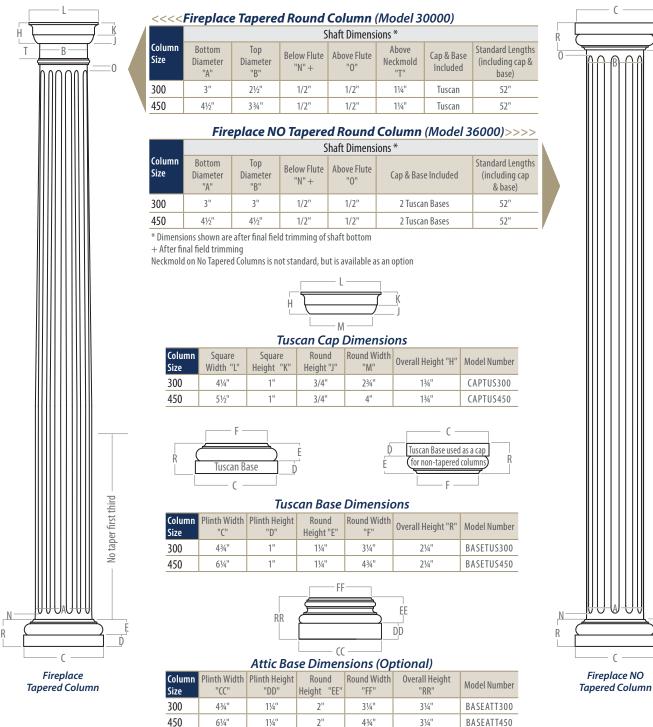



CODE

RTLH

RTRH

RT1

тw

TW1

TW2

D


F

Also see our full-size Tapered and NO Tapered Columns on pages 312-313.



D

FIREPLACE **Tapered & No Tapered Columns**

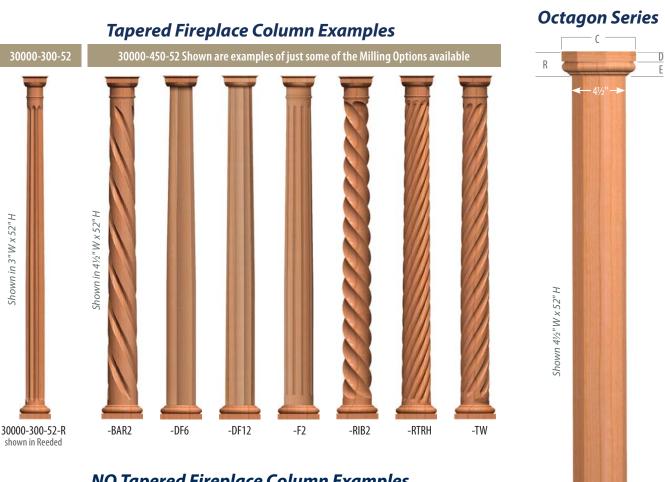

NO Tapered Fireplace Column Examples



Shown in 3" W x 52" H

Ε

D

Ď

Dimensions

6¼"

1"

С 38000-450-52


(

INTERIOR POSTS

Interior Posts

Each solid wood post is inspired by one of our Oak Pointe family designs. Standard post size is 5½" wide and 96" high. Our posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing. See the samples and the pages referred to below for available milling options. Additional Post styles shown in our Exterior Collection, pages 323-329. All Oak Pointe posts are available for interior or exterior applications. Always specify exterior when requesting a quote.



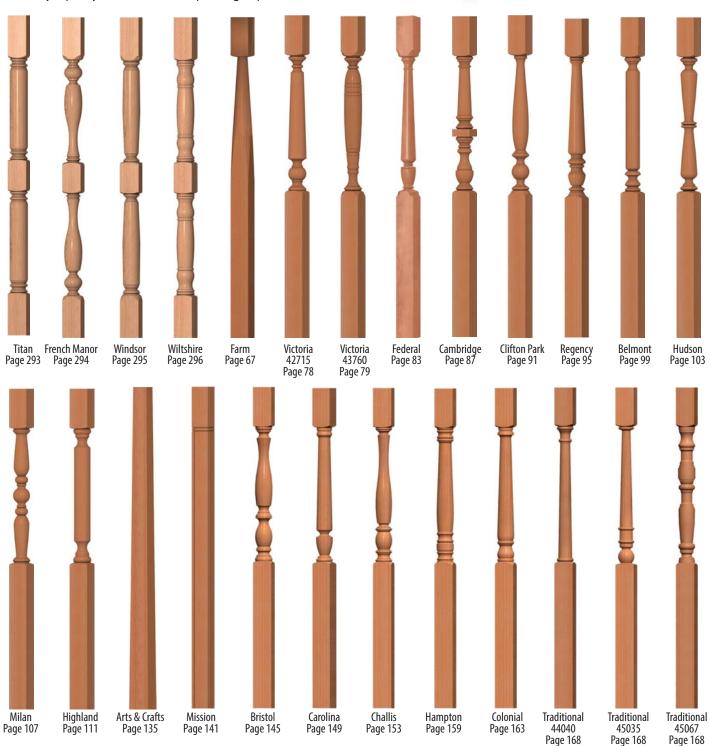





ERIOR

BALUSTERS • NEWELS • POSTS • RAILINGS • BRACKETS • SPINDLES



Exterior Collection

Custom components are an integral part of our business. Call for pricing on your designs for interior or exterior use.









Our Exterior Collection components are offered in:

Pine-Southern Yellow

TOP AND BO



The heartwood is orange to reddish-brown & the sapwood is yellowish white. Boards have contrasting colors - light early wood to darker denser latewood. Stronger than other pines with straight grain & medium even texture. (available in paint grade Southern Yellow Pine)




Sapelle

The heartwood of Sapelle is pink when freshly cut, but it matures to a medium to dark red-brown. The sapwood is grayish -pink or cream in color. The grain is fine and moderately interlocked or wavy. (available in paint grade Sapelle)

Cellular PVC

Cellular PVC trim is a wood replacement product which is different than normal PVC, enabling it to be cut and shaped like wood without wood's disadvantages. Not available in railings & certain turning designs.

Other wood species are available upon request. The key to a lasting wood exterior component system is to finish them with top rated exterior products during installation and when the top coat starts to break down it should be refinished.

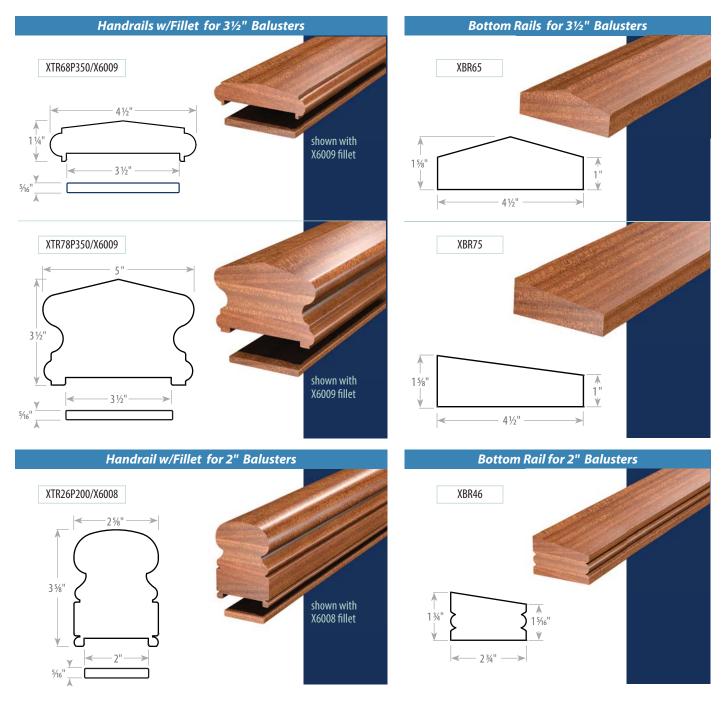

ExteriorThese products will be made with exterior glue but no warranty for exterior use.ProductsOur columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.









Exterior These products will be made with exterior glue but no warranty for exterior use.

Products | Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.





ExteriorThese products will be made with exterior glue but no warranty for exterior use.ProductsOur columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.



CLIFTON PARK

EXTERIOR COLLECTION








Exterior These products will be made with exterior glue but no warranty for exterior use.

Products | Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.



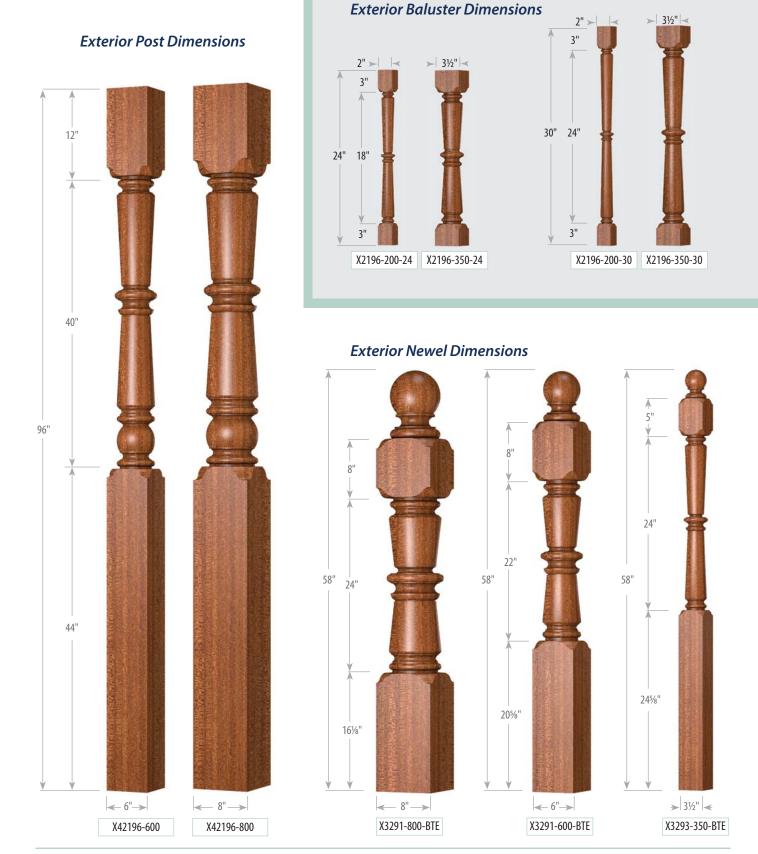

Exterior These products will be made with exterior glue but no warranty for exterior use.

E

Products | Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.







These products will be made with exterior glue but no warranty for exterior use.

Products | Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.




PORCH POSTS



Exterior These products will be made with exterior glue but no warranty for exterior use.

Products Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.



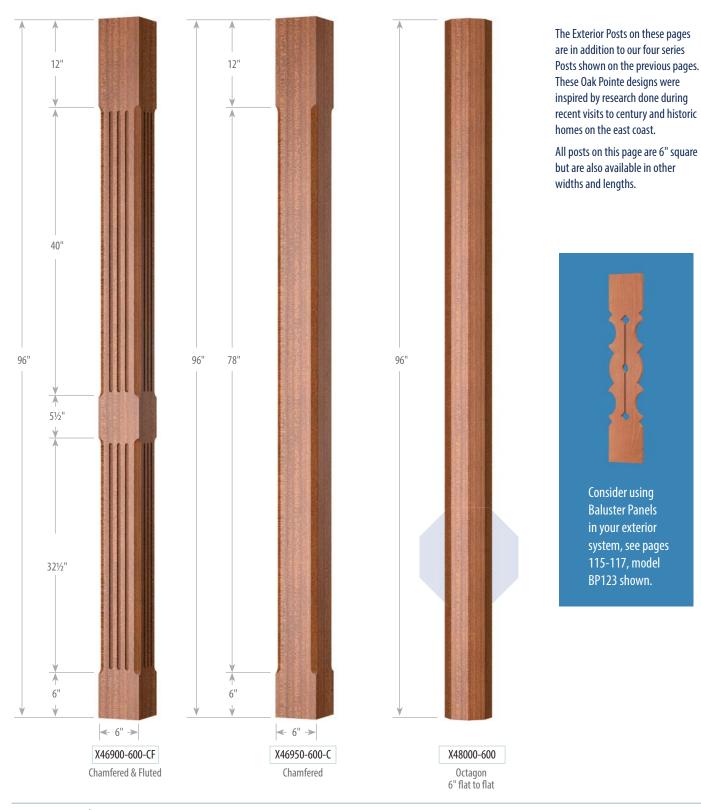

 Exterior
 These products will be made with exterior glue but no warranty for exterior use.

 Products
 Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.




ACCESSORIES EXTERIOR COLLECTION

-

-

Exterior Spindles

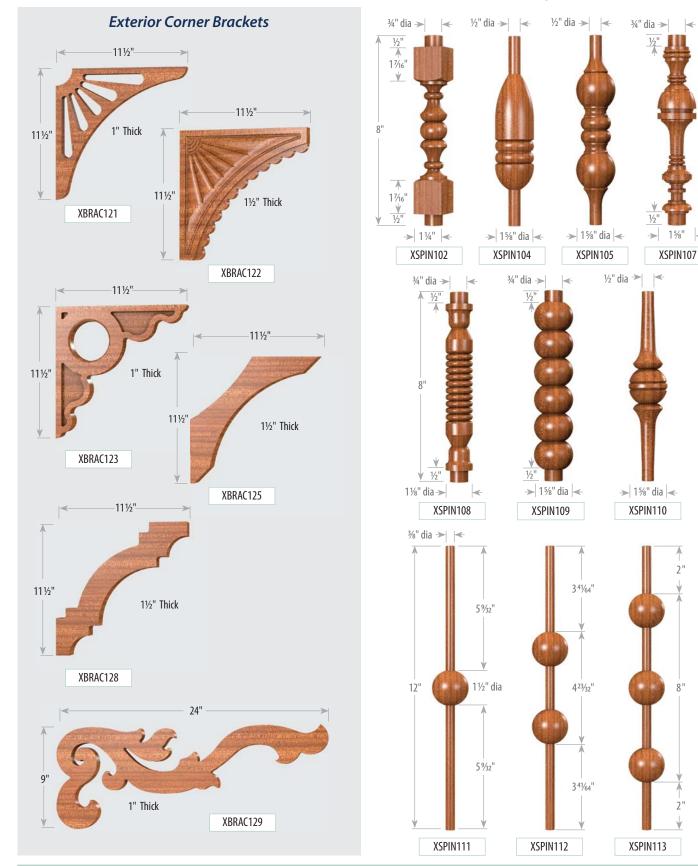


Exterior These products will be made with exterior glue but no warranty for exterior use.

Products | Our columns and posts have not been tested for their weight bearing ability and therefore are sold as NON-weight bearing.



8"

BALUSTER ordering number system:

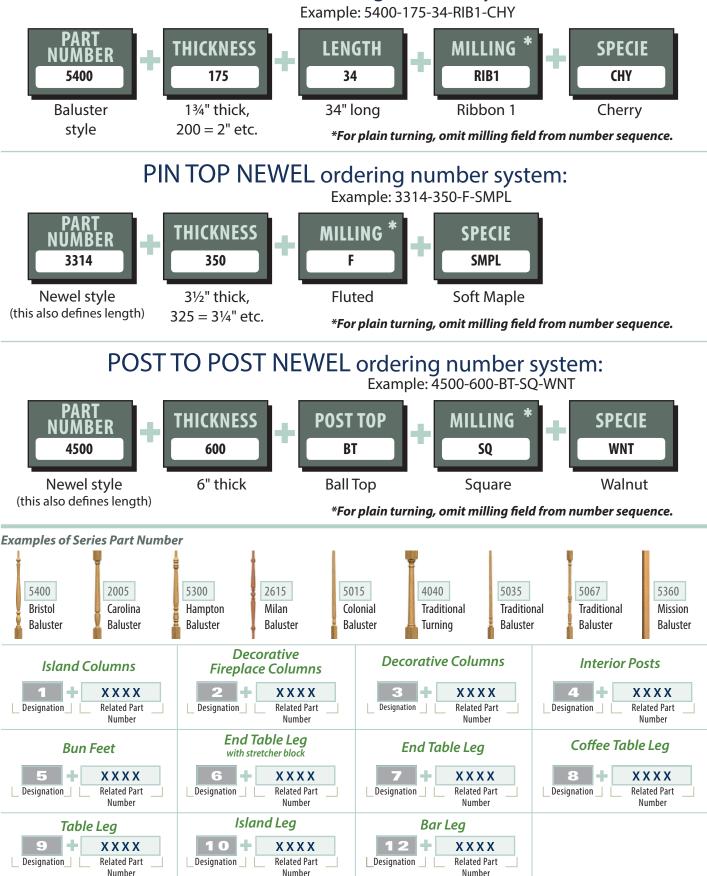



Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
1/2-BPLUG	282	2011	154	3079	282	3486	84	3690	104
1/2-FPLUG	282	2015	147	3085	282	3490	84	3693	104
1-FPLUG	282	2105	151	3105	241	3493	84	3695	104
1-1/2-FPLUG	282	2111	151	3210	154	3495	84	3698	104
1BASK44-9/16	174, 182	2115	151	3214	154	3498	84	3710	74
1KNUC44	174, 182	2200	65	3215	154	3510	100	3713	74
1RIB44	174, 182	2205	65	3217	154	3513	100	3714	74
1TW44-9/16	174, 182	2400	93	3218	154	3514	100	3715	74
1TW44/24-9/16	174, 182	2405	93	3240	154	3515	100	3716	73
1WAVE44-9/16	175, 183	2410	33, 85	3242	154	3516	100	3717	74
2BASK44-9/16	174, 182	2415	85	3245	154	3517	100	3718	74
2KNUC44	174, 182	2500	101	3246	154	3518	100	3720	73
2RIB44	174, 182	2505	101	3253	154	3540	100	3740	74
2SQ-CANOPY-ALUM	244	2510	89	3255	154	3542	100	3742	74
2SQ-NEWEL-X-ALUN	195, 244	2515	25, 89	3258	154	3545	100	3745	74
2SQL-BRAC-90F-316	5 245	2605	109	3270	155	3546	100	3746	74
2SOL-BRAC-90R-31		2610	109	3274	155	3550	100	3750	73
2SQL-BRAC-	· ·	2615	105	3275	155	3553	100	3753	74
FIXF-316	245	2620	105	3277	155	3555	100	3755	74
2SQL-BRAC-	245	2625	105	3278	155	3558	100	3758	74
FIXR-316		2700	97	3310	155	3570	88	3760	73
2SQL-BRAC- PIVF-316	245	2705	97	3313	150	3573	88	3810	80
2SOL-BRAC-	245	2710	75	3314	150	3574	88	3813	80
PIVR-316	245	2715	75	3315	150	3575	88	3814	80
2SQL-CANOPY-316	245	2800	81	3316	150	3576	88	3815	80
2SQL-ECAP-316	245	2805	81	3310	150	3570	88	3816	80
2SQL-FASCIA-316	245								80
2SQL-FLANGE-316	245	2E05	128, 129	3318 3340	150	3578	88	3817	
2SQL-NEWEL-X-316	208, 245	2E15	128, 129			3580	88	3818	80
2SQL-RAIL-240-316	245	3001	282	3342	150	3582	88	3840	80
2TW44-9/16	174, 182	3002	282	3345	150	3585	88	3842	80
218	38	3004	283	3346	150	3586	88	3845	80
253	38	3005	283	3350	150	3590	88	3846	80
300	237	3006	283	3353	150	3593	88	3850	80
302	237	3006-KIT	283	3355	150	3595	88	3853	80
304	237	3007	283	3358	150	3598	88	3855	80
308	238	3008	283	3410	92, 266	3610	108	3858	80
317	38	3009	283	3413	92	3613	108	3910	68
321	239	3010	24, 25, 146	3414	92	3614	108	3914	68
380	238	3013	146	3415	92	3615	108	3915	68
381	238	3014	146	3416	92	3616	108	3917	68
384	239	3015	146	3417	92	3617	108	3918	68
385	239	3016	146	3418	92	3618	108	3940	68
451	38	3017	146	3440	92	3640	108	3942	68
601	282	3018	146	3442	92	3642	108	3945	68
606 (BA)	38	3019	283	3445	92	3645	108	3946	68
606 (DA)	282	3025	282	3446	92	3646	104, 108	3953	68
		3026	282	3450	92	3650	108	3955	68
611	282	3033	282	3453	92	3653	108	3958	68
901	282	3040	146	3455	92	3655	108	3E10	129
915	38	3042	146	3458	92	3658	108	3E14	129
980	241	3045	146	3470	84	3670	104	3E15	129
984	241	3046	146	3473	84	3673	104	3E17	129
988	241	3050	146	3474	84	3674	104	3E18	129
1544-050-44-304	196	3053	146	3475	84	3675	104	3E40	129
1544-050-44-316	196	3055	146	3476	84	3676	104	3E40	129
1644-050-44-304	196	3058	146	3477	84	3677	104	3E45	129
1644-062-44-304	196	3070	283	3478	84	3678	104	3E45 3E46	129
1644-062-44-316	196	3076	282	3478	84	3680	104	3E40 3E50	129
1744-075-44-304	196								
2005	147	3076-100PK 3078	282 282	3482 3485	84 84	3682 3685	104 104	3E53 3E55	129 129



Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
3E58	129	4104	59	4303	155	4755	96	5E60	120, 121
4000	136, 266	4105	59	4304	155	4758	96	5E65	120, 121
4000-350-SSB	58	4106	59	4305	155	4810	70	6000	265
4000-350-SSFT	58	4110	136	4353	155	4814	70	6000-F	265
4000 (Ai)	60	4111	136	4355	155	4815	70	6000-S	265
4000AiBASE	60	4119	136	4358	155	4840	70	6001	265
4001	136	4120	136	4392	54-55	4845	71	6001-S	265
4001-350-SSB	58	4150	160	4410	142	4846	71		210, 220, 225, 246,
4001-350-SSFT	58	4152	160	4413	142	4E00	125	6002	225, 246, 265
4001 (Ai)	60	4155	160	4414	142	4E03	125	6002BH	265
4002	136	4156	160	4415	142	4E04	125	6002BV	265
4002T	132	4160	160	4416	142	4E05	125	6003	265
4003	136	4163	160	4417	142	4E10	121	6003B	265
4003-550-SSB-304	58	4165	160	4418	142	4E14	121	6005	264
4003-550-SSFT-304	58	4168	160	4440	142	4E15	121	6005P	264
4003T	132	4170	132	4442	142	4E17	121	6006	265
4004	156	4174	132	4445	142	4E18	121	6007	265
4005	156	4175	132	4446	142	4E50	124	6010	263
4006	156	4177	132	4450	142	4E53	125	6010B	263
4010	160, 266	4178	132	4453	142	4E55	125	6010B	263
4013	160	4180	161	4455	142	4E58	125	6030	265
4014	160	4182	161	4458	142	4E70	125	6035	265
4015	160	4185	161	4460	62	4E74	125	6038	265
4016	160	4186	161	4463	62	4E75	125	6038B	265
4017	160	4190	161	4464	62	4E77	125	6039	
4018	160	4193	161	4465	62	4E78	125	6039B	197, 265
4019	136	4195	161	4466	62	4E80	121	6039-600-SS	265
4019-350-SSB	58	4198	161	4467	62	4E82	121		197
4019-350-SSFT	58	4200	68, 69	4468	62	4E85	121	6039-601-SS	197
4019 (Ai)	60	4210	64	4480	62	4E86	121	6039-603-SS	197
4020	136	4213	64	4482	62	4E90	121	6039-604-SS	197
		4213	64	4485	62	4E93	120	6039-605-SS	197
4020-350-SSB	58	4214	64	4486	62	4E95	121	6039-660-SS	197
4020-350-SSFT	58	4215	64	4490	62	4E93	121	6039-665-SS	197
4020 (Ai)	60	4210	64	4493	62	5000	69	6039-670-SS	197
4030	71	4217	64	4495	62	5001	69	6039-680-SS	197
4032	71	4218	136	4495	62	5005	157	6039-686-SS	197, 282
4035	71	4219 4219T	130	4498	156	5015	161	6039-CON	197
4039	70							6039-GAU2	197
4040	164	4220 4220T	136	4503 4504	156	5020	61	6039-GAU4	197
4042	164	4220T	132		156	5035	165	6040	265
4045	164	4240	64	4505	156	5060	136, 137	6040B	265
4046	164	4242	64	4550	156	5067	165	6041	210, 220, 225, 246,
4050	164	4245	64	4553	156	5141	161	0041	265
4053	164	4246	64	4555	156	5200	155	6041B	265
4055	164	4250	64	4558	156	5205	155	6042	265
4058	164	4253	64	4630	40-41	5230	133, 161	6042B	265
4060	164	4255	64	4660	40, 42-43	5265	157	6045	265
4070	164	4258	64	4710	96	5300	25, 157	6050	265
4075	45	4270	156	4713	96	5360	72, 133, 136, 137		
4075-SL	45	4273	156	4714	96	5500	137	6109	210, 220, 225, 246, 263
4076	49	4274	156	4715	96	5360-175-X-	58		
4076-SL	49	4275	156	4716	96	SSB-304	00	6109B	263
4091	36, 37, 39,	4276	156	4717	96	5360R	59, 72	6109P	263
	46-47	4277	156	4718	96	5360T	133	6203	265
4091BC	48	4278	156	4740	96	5400	143	6210	262, 263
4091-ADJ	46	4291	33, 39, 50-51,	4742	96	5405	143	6210B	263
4092	33, 39, 52-53	4271	136	4745	96	5420	63	6210P	263
4092BC	48	4293T	44, 132	4746	96	5425	63	6310	263
4092T	44, 132	4294T	44	4750	96	5E00	124, 125	6310B	263
4092T-0CT	44	4300	155	4753	96	5E05	124, 125	6310P	263

Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
6400	263	7917	33	9500P	264	25360	140	50221	134, 299
6400P	263	7938	268	9538	268	25360T	134	50341	134, 299
6519	263	8000	263	9638	268	25400	145	50452	134, 299
6519B	262, 263	8000B	263	9700	264	25E05	126	51040	298
6519P	263	8000P	263	9700P	264	25E65	122	51050	298
6601	263	8010	274	9738	268	30000	312-313,	51057	298
6601B	263	8010-2	279	12005	148		318-319	51065	298
6601P	263	8015	274	12105	152	32005	149	51075	298
6701	263	8030	275	12205	66	32105	153	51080	298
6701B	263	8040	275	12405	94	32200	67	51100	298
6701P	263	8050	275	12415	86	32205	67	52005	148, 298
6710	262, 264	8060	275	12505	102	32405	95	52105	152, 298
6710B	264	8071-LH	279	12515	90	32415	87	52200	66, 298
6710P	264	8071-RH	279	12605	110	32505	103 91	52405	94, 298
6710G	264	8072	279	12615	106	32515		52415	86, 298
6710GB	264	8076	279	12700	98	32605 32615	111	52505	102, 298
6710GP	264	8078	280	12715	77		107	52515	90, 298
6710K	264	8079	279	12805	82	32700 32715	99 78	52605	110, 298
6710KB	264	8080	280	12E05	130			52615	106, 298
6710KP	264	8090	280	13760	77, 284	32805 32E05	83	52700	98, 298
6710W	264	8090-5	280	13940	68	33760	79	52715	77, 298
6710WB	264	8090-5B	280	14040	166	34040	169	52805	82, 298
6710WP	264	8095	280	14392	297	35015		52E05	128, 299
6910	33, 262, 264	8098	280	14840	71		163	54040	167, 299
6910B	264	8148	241	15015	162	35035 35067	169	55015	162, 298
6910P	264	8179	279	15020	60		169 159	55035	167, 299
6B10	263	8210	274	15035	166	35300 35360	141, 315	55067	167, 299
6B10B	263	8215	274	15067	165, 167	35360T		55300	158, 299
6B10P	263	8279	279	15300	158, 290	35400	135, 314 145	55360	140, 299
7001	266	8310	275	15360	140	35400 35E05	145	55400	144, 299
7002	266	8310-2	279	15360-350-SSB2-304	58	35E65	127	55E00	126, 299
7003	266	8315	275	15360-350-SSB-304			312-313,	55E05	126, 299
7023	266	8415	274	15400	144	36000	318-319	55E65	123, 299
7024	266	8422	280	15425	63	36005	316	62005	148
7025	266	8440	275	15E05	126	38000	314, 319	62105	152
7026	280	8460	275	15E65	122	42005	149	62200	66
7027	280	8640	275	17000	293	42105	153	62405	94
7028	281	8660	275	17400	291	42200	67	62415	86
7029	281	8857	241	17550	296	42405	95	62505	102
7032	280	9100L	263	17999	291	42415	87	62515	90
7033	280	9100LB	263	22005	149	42505	103	62605	110
7038	268	9100LP	263	22105	153	42515	91	62615	106
7042	266	9138	268	22200	67	42605	111	62700	98
7043	266	9200	210, 220, 225, 246,	22205	67	42615	107	62715	77
7044	266		263	22405	95	42700	99	62805	82
7138	268	9200B	263	22415	87	42715	78	64040	166
7238	268	9200P	263	22505	103	42805	83	65015	162
7338	268	9300	265	22515	91	43760	79	65035	166
7438	268	9300B	265	22605	111	44040	168	65067	165, 167
7538	268	9300P	265	22615	107	45015	163	65300	158
7619-SLC	266	9311	266	22700	99	45035	168	65360	140
7638	268	9312	266	22715	78	45067	168	65400	144
7719-0LC	266	9313	266	22805	83	45300	159	67300	295
7738	268	9319-LC	266	22E05	130	45360	141	67500	294
7811	266	9338	268	23760	79	45360T	135	67550	296
7812	266	9400	264	24040	168	45400	145	71052	134
7813	266	9400B	264	25015	163	47000	293	71054	134
7821	266	9400P	264	25035	168	47300	295	71150	292
7840	266	9500	264	25067	165, 168	47500	294	72005	148
7888	266	9500B	264	25300	159	47550	296	72105	152



Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
72200	66	92715	77	125400	144	13.0555.038.12	222	13.2000.038.12	231
72405	94	92805	82	127300	295	13.0557.048.12	223	13.2100.000.12	216
72415	86	94040	166	127500	294	13.0700.038.12	224	13.2100.038.12	232
72505	102	95015	162	127550	296	13.0700.050.12	224	13.2200.000.12	217
72515	90	95035	166	137000	293	13.0702.000.12	224	13.2200.038.12	231
72605	110	95067	167	137550	296	13.0702.038.12	224	13.2206.000.12	236
72615	106	95300	158	147000	293	13.0702.050.12	224	13.2206.038.12	236
72700	98	95360	140	147550	296	13.0702.338.12	224	13.2400.000.12	216
72715	77	95400	144	10.4821.000.20	213	13.0702.350.12	224	13.2400.048.12	232
72805	82	97300	295	10.4822.000.20	213	13.0702.838.12	224	13.2500.038.12	231
74040	166	97500	294	10.4823.000.20	213	13.0702.850.12	224	13.2800.000.12	217
75015	162	97550	296	10.6734.004.20	202	13.0705.000.12	224	13.2800.048.12	232
75035	166	97920	292	10.6734.105.20	204	13.0705.038.12	224	13.2800.700.12	217
75067	167	97950	292	10.6735.105.20	204	13.0705.050.12	224	13.2800.900.12	217
75300	158	101052	134	13.0111.000.12	227	13.0708.000.12	215	13.4111.000.12	211
75400	144	101054	134	13.0111.038.12	227	13.0708.042.12	215	13.4111.038.12	211
77000	293	101150	292	13.0111.050.12	227	13.0711.200.12	224	13.4133.000.12	210
77300 77500	295 294	102005 102105	148	13.0112.038.12	227	13.0711.238.12	224	13.4133.038.12	210
77550	294	102105	152 66	13.0112.050.12 13.0117.000.12	227 233	13.0711.838.12 13.0719.238.12	224	13.4145.000.12 13.4145.038.12	211 211
81052	134	102200	94	13.0117.038.12	233	13.0719.238.12	224	13.4145.038.12	211
81052	134	102405	86	13.0117.050.12	233	13.0723.000.12	224	13.4155.038.12	218
81150	292	102505	102	13.0121.038.12	235	13.0726.238.12	218	13.4200.000.12	213
82005	148	102515	90	13.0122.038.12	227	13.0729.016.12	215, 230	13.4200.038.12	232
82105	140	102605	110	13.0130.000.12	223	13.0739.038.12	213, 230	13.4200.048.12	232
82200	66	102615	106	13.0138.038.12	223	13.0747.000.12	207	13.4200.700.12	217
82405	94	102700	98	13.0138.050.12	223	13.0747.038.12	207	13.4200.900.12	217
82415	86	102715	77	13.0140.038.12	227	13.0749.300.12	207	13.4301.040.12	210
82505	102	102805	82	13.0141.038.12	227	13.0749.400.12	207	13.4304.040.12	210
82515	90	104040	166	13.0145.000.12	227	13.0771.248.12	224	13.4312.040.12	210
82605	110	105015	162	13.0145.038.12	227	13.0790.016.12	215, 230	13.4505.040.12	210
82615	106	105035	166	13.0145.050.12	227	13.0790.038.12	211, 225	13.4511.040.12	208
82700	98	105067	167	13.0146.038.12	227	13.0830.012.12	214, 230	13.4558.040.12	209
82715	77	105300	158, 290	13.0150.000.12	233	13.0831.000.12	214	13.4710.000.12	209
82805	82	105360	140	13.0150.038.12	233	13.0831.038.12	229	13.4710.038.12	209
84040	166	105400	144	13.0150.050.12	233	13.0831.048.12	229	13.4710.800.12	209
85015	162	107300	295	13.0151.038.12	233	13.0832.000.12	214	13.4710.838.12	209
85035	166	107500	294	13.0155.000.12	233	13.0832.038.12	229	13.4718.000.12	209
85067	167	107550	296	13.0155.038.12	233	13.0832.048.12	229	13.4718.038.12	209
85300	158	121052	134	13.0155.050.12	233	13.0833.000.12	214	13.4727.000.12	209
85360	140	121054	134	13.0156.038.12	233	13.0833.038.12	229	13.4732.040.12	210
85400	144	121150	292	13.0168.038.12	223	13.0833.048.12	229	13.4790.040.12	210
87000	293	122005	148	13.0300.038.12	226	13.0834.048.12	229	13.4900.015.12	213
87300	295	122105	152	13.0302.012.12	214, 230	13.0839.048.12	229	13.4900.040.12	210
87500	294	122200	66	13.0303.038.12	211, 226	13.0840.000.12	215	13.4913.040.12	208
87550	296	122405	94	13.0304.038.12	226	13.0840.038.12	230	13.4925.015.12	213
87910	292	122415	86	13.0305.038.12	226	13.0850.038.12	230	13.4925.040.12	210
91052	134	122505	102	13.0305.248.12	226	13.0855.038.12	230	13.4940.040.00	208
91054 91150	134 292	122515 122605	90 110	13.0307.038.12	225	13.0900.012.12	214, 229	13.4942.040.00	208 218
91130	148	122605	106	13.0308.038.12 13.0312.038.12	226 226	13.0900.016.12 13.0900.038.12	215, 230 211, 225	13.5112.000.12 13.5212.000.12	218
92005		122013	98				211, 225		
92105	152 66	122700	98	13.0312.248.12 13.0317.038.12	226 226	13.0900.248.12 13.0911.438.12	225	13.5729.038.12 13.5729.248.12	211, 225 225
92200	94	122715	82	13.0318.038.12	226	13.0913.438.12	222	13.5732.038.12	223
92405	86	122005	166	13.0504.038.12	220	13.0916.448.12	222	13.5732.248.12	211, 225
92415	102	124040	160	13.0504.048.12	225	13.0918.448.12	222	13.6302.042.12	223
92505	90	125015	166	13.0505.038.12	211, 225	13.0945.038.12	222	13.6302.640.12	199
92605	110	125067	167	13.0511.038.12	211, 223	13.0943.038.12	223	13.6312.042.12	200
92615	106	125300	158	13.0511.048.12	222	13.0951.448.12	222	13.6312.640.12	199
92700	98	125360	140	13.0551.038.12	222	13.2000.000.12	217	13.6313.042.12	200
12100	20	123300	140	13.0331.030.12	222	13.2000.000.12	217	13.0313.042.12	200



Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
13.6313.640.12	199	14.0555.038.12	222	14.2206.038.12	236	14.5727.262.12	220	19.5000.007.00	217, 231
13.6505.042.12	200	14.0557.048.12	223	14.2400.000.12	216	14.5728.063.12	221	19.5000.008.00	217, 231
13.6505.640.12	199	14.0700.038.12	224	14.2400.048.12	232	14.5729.038.12	211, 225	19.5001.008.00	217, 232
13.6729.042.12	200	14.0700.050.12	224	14.2500.038.12	231	14.5729.248.12	225	19.5001.009.00	217, 232
13.6732.640.12	199	14.0702.038.12	224	14.2800.000.12	217	14.5732.038.12	211, 225	19.5001.010.00	217, 232
13.6790.640.12	199	14.0702.050.12	224	14.2800.048.12	232	14.5732.248.12	225	19.5001.011.00	217, 232
13.6792.042.12	200	14.0702.338.12	224	14.2800.700.12	217	14.5792.038.00	225	19.5001.012.00	217, 232
13.6920.004.12	202	14.0702.350.12	224	14.2800.900.12	217	14.5792.048.00	225	19.5001.013.00	217, 232
13.6920.005.12	204	14.0702.838.12	224	14.3502.038.00	223	14.5792.262.00	220	19.5002.006.00	216, 232
13.6920.042.12	200	14.0702.850.12	224	14.3503.063.00	220	14.6012.000.12	205	19.5002.007.00	216, 232
13.6920.640.12	199	14.0705.000.12	224	14.3505.048.00	223	14.6212.000.12	205	19.5002.008.00	216, 232
13.6921.124.12	202	14.0705.038.12	224	14.4101.000.12	211	14.6302.640.12	199	19.5002.009.00	216, 232
13.6921.134.12	202	14.0711.200.12	224	14.4101.038.12	211	14.6312.640.12	199	19.5002.010.00	216, 232
13.6921.174.12	202	14.0711.238.12	224	14.4133.038.12	210	14.6313.042.12	200	19.5003.008.00	217, 232
13.6921.194.12	202	14.0711.838.12	224	14.4200.000.12	217	14.6313.640.12	199	19.5003.009.00	217, 232
13.6925.042.12	200	14.0719.238.12	224	14.4200.038.12	232	14.6505.042.12	200	19.5003.010.00	217, 232
13.6925.640.12	199	14.0722.038.12	224	14.4200.048.12	232	14.6505.640.12	199	19.5003.011.00	217, 232
13.8925.012.12 13.8925.016.12	214, 229	14.0723.000.12	218	14.4200.700.12	217	14.6729.042.12	200	19.5003.012.00 19.5003.013.00	217, 232
13.8925.038.12	215, 230	14.0726.238.12	224	14.4200.900.12 14.4301.040.12	217 210	14.6732.640.12 14.6790.640.12	199 199	19.5003.013.00	217, 232
13.8925.248.12	211, 225 225	14.0729.016.12 14.0739.038.12	215, 230	14.4301.262.12	210	14.6792.042.12	200	19.5004.007.00	217, 231
13.9320.038.12	223	14.0739.038.12	211, 225 207	14.4301.262.12	220	14.6920.042.12	200	19.5004.007.00	217, 231 217, 231
13.9350.038.12	233	14.0746.038.12	207	14.4312.040.12	210	14.6920.504.12	200	19.5004.009.00	217, 231
14.0111.000.12	233	14.0747.000.12	207	14.4312.262.12	210	14.6920.505.12	202	19.5004.009.00	217, 231
14.0111.038.12	227	14.0747.038.12	207	14.4504.062.12	220	14.6920.640.12	199	19.5007.013.00	216, 232
14.0111.050.12	227	14.0749.300.12	207	14.4505.040.12	220	14.6922.124.12	202	19.5007.017.00	216, 232
14.0112.038.12	227	14.0749.400.12	207	14.4511.040.12	208	14.6922.134.12	202	19.5007.018.00	216, 232
14.0112.050.12	227	14.0771.248.12	224	14.4511.050.12	205	14.6922.174.12	202	19.5007.064.00	216, 232
14.0121.038.12	227	14.0790.016.12	215, 230	14.4513.063.12	219	14.6922.214.12	202	19.5009.011.00	231
14.0122.038.12	227	14.0790.038.12	211, 225	14.4558.040.12	209	14.6925.640.12	199	19.5009.012.00	231
14.0138.038.12	223	14.0831.000.12	214	14.4558.063.12	220	14.8925.038.12	211, 225	19.5009.013.00	231
14.0140.038.12	227	14.0831.038.12	229	14.4710.000.12	209	14.8925.248.12	225		217, 231,
14.0141.038.12	227	14.0831.048.12	229	14.4710.038.12	209	16.6315.005.18	203	19.5015.022.00	232, 236
14.0145.038.12	227	14.0832.000.12	214	14.4710.800.12	209	16.6316.005.18	203	19.5015.025.00	231
14.0146.038.12	227	14.0832.038.12	229	14.4710.838.12	209	16.6734.004.18	202	19.5015.030.00	205, 216, 232
14.0150.000.12	233	14.0832.048.12	229	14.4711.000.12	219	16.6734.005.18	204	19.5042.011.00	199, 200
14.0150.038.12	233	14.0833.000.12	214	14.4711.042.12	219	16.6735.005.18	204	19.5042.016.00	199, 200
14.0150.050.12	233	14.0833.038.12	229	14.4711.048.12	219	16.6736.004.18	202	19.5042.019.00	199, 200
14.0151.038.12	233	14.0833.048.12	229	14.4718.000.12	209	16.6736.005.18	204	19.5042.211.00	199, 200
14.0155.000.12	233	14.0834.048.12	229	14.4718.038.12	209	16.6737.005.18	204	19.5042.216.00	199, 200
14.0155.038.12	233	14.0839.048.12	229	14.4719.000.12	219	16.6904.300.18	201	19.5042.219.00	199, 200
14.0155.050.12	233	14.0840.000.12	215	14.4719.042.12	219	16.6904.600.12	201	19.6904.912.00	201, 203
14.0156.038.12	233	14.0840.038.12	230	14.4719.048.12	219	16.6905.300.18	203	19.6904.913.00	201, 203
14.0168.038.12	223	14.0900.012.12	214, 229	14.4725.063.12	221	16.6905.600.18	203	19.6904.914.00	201, 203
14.0300.038.12	226	14.0900.016.12	215, 230	14.4732.040.12	210	16.6920.005.18	204	19.6904.917.00	201, 203
14.0302.012.12	214, 230	14.0900.038.12	211, 225	14.4747.300.12	206	16.6940.013.18	198	19.6904.918.00	201, 203
14.0302.016.12	215, 230	14.0900.248.12	225	14.4762.000.12	206	16.6940.022.18	198	19.6904.919.00	201, 203
14.0303.038.12	211, 226	14.0913.438.12	222	14.4790.040.12	210	16.6948.004.18	202	19.6920.000.00	201, 203, 257
14.0305.038.12	226	14.0916.448.12	222	14.4900.015.12	213	19.0601.000.00	257	19.6921.000.00	203
14.0305.248.12	226	14.0918.448.12	222	14.4900.040.12	210	19.0610.000.00	257	24.6922.007.36 A	204 240
14.0308.038.12	226	14.0942.038.00	223	14.4900.063.12	220, 221	19.0640.000.00	257		
14.0312.038.12 14.0312.248.12	226 226	14.0951.438.12 14.0951.448.12	222 222	14.4900.262.12 14.4901.063.12	220 219	19.0701.000.00 19.0701.014.00	257 257	A-24 A-501-K	179, 197, 257 179, 197, 257
14.0504.038.12	220	14.2000.000.12	217	14.4901.003.12	213	19.0702.030.00	207, 257	ALUM-H-05P	182-185
14.0504.038.12	225	14.2000.038.12	217	14.4915.040.12	208	19.0702.050.00	207, 257	ALUM-H-05P	182-185
14.0505.038.12	223	14.2100.000.12	231	14.4925.262.12	220	19.0702.050.00	216, 231	ALUM-LAK01	177
14.0505.058.12	211, 223	14.2100.000.12	232	14.4942.040.00	208	19.1331.000.00	210, 251	ALUM-LH-05P	177
14.0511.038.12	222	14.2200.000.12	232	14.4943.040.12	208	19.1340.310.00	199, 200, 257	ALUM-LH-05P	178
14.0513.038.12	222	14.2200.038.12	231	14.5112.000.12	218	19.1350.018.00	199, 200, 237	ALUM-LM-06	176, 177, 180
14.0551.038.12	223	14.2206.000.12	236	14.5212.000.12	218	19.5000.006.00	217, 231	ALUM-LPSH-02	176, 177, 180
17.0331.030.12	LLL	17.2200.000.12	250	14.5212.000.12	210	19.3000.000.00	217,231	ALOM LI JII-02	170, 177, 100



Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
ALUM-LR-10	179	CAB-A-JTE6	252	CAB-PT-CR	256	ESN155-F	28	FINIAL-VEN-2875	302
ALUM-M-06	182-183, 186	CAB-BCP	246	CAB-PUL-4-12	251	ESN170-0BB	28	FINIAL-VIC-3125	302
ALUM-PSH-02	182-183, 186	CAB-BCPS	246	CAB-PUL-4-2.030	251	ESN175	28	FINIAL-VICF-3125	302
APP100	71	CAB-BW32-6	255	CAB-PUL-6-12	251	ESN180	28, 76	FLOWER1	239
APP110	71	CAB-BW35-6	255	CAB-PUL-6-2.030	251	ESN200	29, 35, 76	Flooring	280
BA1100	307	CAB-BW38-6	255	CAB-R-4-12	249	ESN210	29, 35, 76	FPM220	304
BA1200	307	CAB-CB34.5-SS10	246	CAB-R-4-32	249	ESN215	29, 35, 76	FPM230	304
BA1220	307	CAB-CB40.5-SS12	246	CAB-R-4-62	249	ESN220	29, 35	FPM240	304
BA1300	308	CAB-CB42-ANAL	246	CAB-R-6-12	248	ESN230	29	FPM250	304
BA1400	308	CAB-CB42-ANAL-13	246	CAB-R-6-32	248	ESN240	29	FPM260	304
BALL-1000	303	CAB-CB42-BLAL	246	CAB-R-6-62	248	ESN242	29	FPM270	304
BALL-1200	303	CAB-CB42-BLAL-13	246	CAB-S-4	248	ESN260	29	FPMS222	305
BALL-1200-1/2	303	CAB-CBS34.5-SS10	246	CAB-S-6	248	ESN275	29	FPMS232	305
BALL-1400	303	CAB-CBS40.5-SS12	246	CAB-SC-6	252, 253,	ESN300	29	FPMS242	305
BALL-1475	303	CAB-CS-TUBE-4	246		254, 255	F600	179	FPMS262	305
BALL-1475-FLT-600	303	CAB-CUTTER12	256	CAB-TS-4	249	F600IT	179	Н	240
BALL-200	303	CAB-CUTTER7	256	CAB-TT-6B	252, 253, 254, 255	F600N	179	INS-120	258
BALL-300	303	CAB-CUTTER9	256	CAB-VGJ-PT4C	256	FINIAL-ASH-325	301	INS-171	258
BALL-400	303	CAB-CUTWHEEL	256	CAB-VGJ-PT6C	256	FINIAL-ASHCP-325	301	L14044	173, 178
BALL-600	303	CAB-DRILL-TEMP	256	CAPITAL200	316	FINIAL-AT-325	301	L14344	173, 178
BALL-800	303	CAB-F-4	249, 252, 253, 255	CAPTUS	312, 318	FINIAL-ATH-2875	301	L15044	173, 178
BASEATT	312, 316, 318	CAD-F-4		CB1100	307	FINIAL-ATX-325	301	L16044	173, 178
BASEMIS	141, 314, 315	CAB-F-6	249, 252, 253, 255	CM1100	307	FINIAL-BT-325	301	L1BASK44	173, 177
BASEOCTUS	314, 319	CAB-F-JC2-4	255, 255	CM1200	307	FINIAL-BTB-325	301	L1KNUC44	173, 177
BASESQTUS	141, 314, 315	CAB-F-JC2-6	255	CM1400	308	FINIAL-BTP-325	301	L1TW22	173, 177
BASETUS	312, 318	CAB-FLP-CBS	235	CR1100	307	FINIAL-BTR-325	301	L1TW44	173, 177
BB1100	307	CAB-G-C6-3	246	CR1200	307	FINIAL-CBT-275	301	L1WAVE44	173, 177
BB1200	307	CAB-GTS	256	CR1400	308	FINIAL-CBTP-275	301	L2BASK44	173, 177
BB1300	308		252, 253,	DOWELW00D1/2X2	114-117	FINIAL-CHAB-2375	301	L2KNUC44	173, 177
BB1400	308	CAB-LE-6	254, 255	DS1100	307	FINIAL-CHAM-2375	301	L2TW44	173, 177
BP120	115	CAB-LE-6L	252, 253, 254, 255	DS1200	307	FINIAL-COL-300	301	L30144	173, 177
BP120	115	CAB-PL-4-12	254, 255	DS1200	308	FINIAL-DOM-250	301	L30544	174, 180
BP121 BP122	116	CAB-PL-4-2.030	250	DS1500	308	FINIAL-DOM-230		L30344	173, 178
BP122 BP123	116, 329	CAB-PL-6-12	250	ESB100	28	ESN100-6375	301	L30844	173, 178
BP123 BP124	117	CAB-PL-6-2.030	250	ESB140	28	FINIAL-ESN155	24	L40144	174, 180
BP125	117	CAB-PLIERS	256	ESB181	76	FINIAL- ESN155-3375	302	L43244	174, 180
BP126	117	CAB-PL-IMTH4	250	ESB182	76	FINIAL-ESN90-325	301	L43544	173, 176
BP140	117	CAB-PL-IMTH6	251	ESB183	76	FINIAL-F20-250	300	L43644	173, 176
BP141	114	CAB-PL-KEY	256	ESN14-OBB	25, 26	FINIAL-F43-2875	300	L43844	173, 176
BP142	114	CAB-PL-LAG4	250	ESN15	26	FINIAL-F51-2375	300	L43944	173, 176, 195
BP143	115	CAB-PL-LAG6	251	ESN18	26	FINIAL-F78-325	300	L50144	
		CAB-PLP-IMTH4	254	ESN19	26	FINIAL-F78CP-325	300	L60144	174, 180
C2	264	CAB-PLP-IMTH6	254	ESN30	26	FINIAL-F84-2125	301		174, 180
C2B	264			ESN35	26	FINIAL-F88-325	301	L65044	174, 179, 195
C2P	264	CAB-PLP-LAG4 CAB-PLP-LAG4-L	254	ESN35	20	FINIAL-FED-3125	82, 302	L65144	173, 179
C3	264		254	ESN38	27	FINIAL-FLA	33	L65244	173, 179
C3B	264	CAB-PLP-LAG6	254	ESN45				L65344	173, 179
C3P	264	CAB-PLP-LAG6-L	254	ESN45 ESN48	27	FINIAL-FLA-2125	302	L8611	176-180
(5	264	CAB-PLPT-IMTH4	253		27	FINIAL-LIGH-2875	302	LAG38x175	196
CA1100	307	CAB-PLPT-IMTH6	253	ESN50	27	FINIAL-LTB-425	302	LMMN-L2-47	235
CA1200	307	CAB-PLPT-LAG4	253	ESN65-RBB	27	FINIAL-MBT-2875	302	LMMN-L4-47	235
CA1300	308	CAB-PLPT-LAG4-L	253	ESN70	27	FINIAL-MBTR-2875	302	LMP-L1233	235
CA1400	308	CAB-PLPT-LAG6	253	ESN80	27	FINIAL-MET-300	102, 302	LMP-L1237	235
CAB-125	246	CAB-PLPT-LAG6-L	253	ESN85	27	FINIAL-MT-325	302	LMP-L1833	235
CAB-187	246	CAB-PL-TE-4	254	ESN90	27	FINIAL-PORT-325	59, 302	LMP-L1837	235
CAB-7/16SAE	248, 249, 250, 251, 255	CAB-PL-TE-6	254	ESN95	28	FINIAL-REG-300	302	LMP-L2433	235
	255	CAB-PLT-IMTH4	250	ESN100	28	FINIAL-REGR-300	302	LMP-L2437	235
CAB-A-J62	253	CAB-PLT-IMTH6	250	ESN125	28	FINIAL-ST-3125	302	LMP-L3033	235
CAB-A-JB6	249	CAB-PLT-LAG4	250	ESN130	28	FINIAL-TEA-225	302	LMP-L3037	235
CAB-A-JB6-L	249	CAB-PLT-LAG6	250	ESN140	28	FINIAL-TEM-300	302	LMP-L3633	235
CAB-A-JTB6	249	CAB-PT-250	256	ESN145	28	FINIAL-URN-225	302	LMP-L3637	235

Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)	Model No.	Page(s)
LMP-L4233	235	RM1000	306	SSL55-304	58	XSPIN102	330	xx21-135	271
LMP-L4237	235	RM1250	306	Treads	276	XSPIN104	330	xx22-L	271
LMP-L4833	235	RM1500	306	Treads- bow front	276	XSPIN105	330	xx22-R	271
LMP-L4837	235	RM1750	306	Treads- thick	278-279	XSPIN107	330	xx30	270
LMP-R369-1530	235	RM2000	306	Treads- winder	277	XSPIN108	330	xx31	270
LMP-R369-1533	235	RM375	306	Treads- winder	277	XSPIN109	330	xx35	270
LMP-R369-2230	235	RM500	306	blanks	2//	XSPIN110	330	xx36	270
LMP-R369-2233	235	RM625	306	TUBE-050-100-SAT	214, 229	XSPIN111	330	xx38	268, 270
LMP-R369-3030	235	RM750	306	TUBE-050-236-304	214, 229	XSPIN112	330	xx40	270
LMP-R369-3033	235	RMB1000	306	TUBE-0625-100-SAT	215, 230	XSPIN113	330	xx41	270
LMP-R369-3730	235	RMB375	306	TUP	179	XTR26P200	322	xx45	270
LMP-R369-3733	235	RMB500	306	U	240	XTR68P350	322	xx46	270
LMP-R369-4530	235	RMB750	306	VV-DRAG	269	XTR78P350	322	xx50	272
LMP-R369-4533	235	Q-90	259	VV-EAG	269			xx50-135	273
LMSN-L-X	235	Q-92	259	VV-HOR	269	Fitting Parts		xx55	272
LMSN-R369-X	235	Q-94	259	VV-LAB	269	70хх	267-273	xx55-135	273
LPLA44	173, 176,	Q-97	259	VV-LEAF	269	7Вхх	267-273	xx60	272
LPLA44-9/16HM	177, 180 173, 178	QS-6	258	VV-LION	269	71xx	267-273	xx60-135	273
M13144	173, 178	QS-22	258	Winder Treads	277	72xx	267-273	хх65	272
M13144 M13244	175, 185	QS-27	258	WS-111	258	73хх	267-273	xx65-135	273
		QS-36	259	X2001	325	74xx	267-273	xx71	273
M14044 M15044	175, 184	QS-41	258	X2196	326	75xx	267-273	xx71-135	273
M15044 M16044	175, 184 175, 184	QS-42	258	X2511	324	76хх	267-273	хх76	273
M10044 M30244		QS-55	258	X2716	323	77хх	267-273	хх76-135	273
	175, 181, 186	QS-86	258	X3201	325	77xxG	267-273	xx81	273
M30244HM M30544	175, 186 175, 185, 195	QS-111	258	X3203	325	77ххК	267-273	xx81-135	273
M30344 M30844		QS-113	258	X3291	326	77xxW	267-273	хх86	273
M31044	175, 185, 195 175, 185	QS-120	258	X3293	326	78хх	267-273	xx86-135	273
M31044 M32544	175, 181, 183	QS-122	258	X3583	324	79хх	267-273	xx88	273
		QS-123	258	X3591	324	8Bxx	267-273	xx90	272
M32644HM	175, 181, 186, 195	QS-127	258	X3761	323	91xxL	267-273	xx91	272
M32744HM	175, 186	QS-171	258	X3763	323	92хх	267-273	хх92	272
M32844HM	175, 181, 186	QS-229	259	X4201	325	93хх	267-273	хх93	272
M33844	175, 186	QS-232	259	X6008	322	94xx	267-273	xx94	272
M60244	175, 186	QS-233	259	X6009	322	95xx	267-273	xx95	272
M60244HM	175, 186	QS-238	259	X42196	326	96хх	267-273	xx97	273
M70144	175, 181, 183	QS-239	259	X42511	324	97xx	267-273	xx99	273
M70244	175, 183	QS-243	259	X42716	323	С2хх	267-273		
M70344	175, 183	QS-246	208, 223, 259	X46000	328	СЗхх	267-273	NATE	() . .
M70644	175, 183	QS-247	208, 223, 259	X46100	328	xx08	271	NOTE: Lower ca additional num	se (x) denotes bers to
M9044	175, 184, 185, 195	QS-519	259	X46150	328	xx08S	271	complete fittin	
MEDALLION	271	QS-533	258	X46200	328	xx09	271		
MORTGAGE BUTTON	271	QS-549	259	X46250	328	xx09S	271		
N121-300	116	QS-559	259	X46300	328	хх10	271		
NB-562x437	244	S4S	306	X46400	327	xx11	271		
0BB	244	SB100	71, 281	X46500	327	xx11-135	271		
PB1100	307	SB105	281	X46600	327	xx12	271		
PB1400	307	SB110	281	X46610	327	хх13	271		
PED-1000-5.5-		SB115	281	X46900	329	xx14-90	271		
21.875-R	287	SB120	281	X46950	329	xx15	271		
PED-2105-1425- 22-F	287	SB125	281	X48000	329	хх16	271		
	174, 181,	SB130	281	XBR46	322	xx17	268		
PLA44	182, 183	SB131	281	XBR65	322	xx17-1	268		
PLA44-9/16	174, 182, 183	SPH-1/2END-304	215, 230	XBR75	322	хх17-3	268		
PLA44HM	175, 181, 186	SPH-1/2END-316	215, 230	XBRAC121	330	xx17-290	268		
PLARD44-9/16	174, 183	SPH-1/2THRU-304	196, 215, 230	XBRAC122	330	xx17-2180	268		
R1259	24, 290	SS-TUBE CUTTER	214, 229	XBRAC123	330	xx18	271		
R1266	24, 290	SS-TUBE-CUTTING-	214 220	XBRAC125	330	xx19	271		
RBB	25	WHEEL	214, 229	XBRAC128	330	xx20	271		
Risers	276	SSL35-304	58	XBRAC129	330	xx21	271		





Oak Pointe is proud to offer our various proprietary brands or wood collections as well as the finest metal products in the industry... your one stop shopping source for **stair parts and more**!







european collection



www.StairPartsandMore.com



Iron Balusters

Stainless Steel, Cable & Glass Systems Table Legs, Pedestals & Bun Feet Island & Fireplace Columns Tapered & No Tapered Columns Columns for any Application Finials, Carvings, Corbels & Mouldings Novelty Items & Store Fixtures Custom & Large Turnings Interior & Exterior Applicationsand MORE!

Common to Extraordinary Stair Parts, Columns and other Millwork



F B You Tube houzz

www.StairPartsandMore.com

Oak Pointe, LLC. 96 New Pace Road Newcomerstown, Ohio 43832 Phone: 740.498.9820 Fax: 740.498.9821

Distributed by	y:		

a 2017 Oak Painta LLC

Follow us on: